

FAAC

Valid from 01/2026



CATALOGUE

*Gates automation and barriers
Entrances and automatic doors
Access control systems
Motors for shutters and awnings*



FAAC



Gate automation
Automatic Barriers
Automations for rolling
shutters and sun awnings
Automations for spring
balanced rolling shutters
Turnstiles and pedestrian
gates
Accessories for automations
Automatic Doors



FAAC: TECHNOLOGY THAT SURROUNDS YOU

Innovation, the ability to push ourselves beyond established practice, the courage to cross frontiers and open up many more: these are the values that have inspired FAAC throughout its history.

FAAC was founded in Zola Predosa (Bo) Italy in 1965 and right from the very beginning became synonymous with automation systems for gates due to innovation and the quality and the reliability of its products.

Today, after having filed 40 patents for its own design solutions, FAAC has achieved unparalleled international success and has considerably expanded its product range: not only have the residential solutions made FAAC famous throughout the world but also its commercial and office access control solutions.



3800+
PEOPLE EMPLOYED IN 5
CONTINENTS



16
PRODUCTION FACILITIES IN
15 COUNTRIES



55
SALES COMPANIES IN 29
COUNTRIES



1
NETWORK OF MORE THAN
80 COUNTRIES SERVED BY
OFFICIAL DISTRIBUTORS

These are the numbers of FAAC Technologies, one of the most important companies of European industry.



Technologically innovative.

The passion for research into new technological solutions and the optimisation of existing systems are the values on which FAAC's philosophy is based. That's the way our whole organisation works, to design products that are better every day.

Nothing but quality, always.

The continuous inspection of its products makes FAAC synonymous with quality and safety. From the raw materials to its suppliers and the manufacturing processes, which are carried out entirely in-house, the keyword is Quality, without compromise.

Reliability and safety above all.

All FAAC products undergo very thorough testing to ensure their long-term reliability. Scrupulous compliance with international safety standards ensures complete safety for people and the environment.

Customer satisfaction, every day.

FAAC works to make its solutions a perfect answer to everyday needs. This is why FAAC guarantees the satisfaction of its customers by carefully monitoring the market to find and interpret new needs in advance.



SAFE & GREEN SUSTAINABILITY IS AUTOMATIC

SAFEzone. EVERYTHING IS EASIER, EVERYTHING IS SAFER.

With SAFEzone, FAAC identifies systems conducive to more convenient installation of automation systems in compliance with the requirements of the European Directive currently in force (Machinery Directive 2006/42/EC) on safety.

SAFEzone includes a range of FAAC solutions (Hydraulic and electromechanical operators with 24Vdc and 230Vac power supply) that, by means of the use of new control boards and/or new devices like the absolute encoder **SAFEcoder (FAAC patent)**, allow not only the realization of new installations in compliance with the Euro Norm requirements, but also the up-grade of existing installations with no need to replace the automations already installed.



SAFEcoder: the heart of safety

The new absolute encoder SAFEcoder guarantees complete movement control, reverse on obstacle detection and offers the following advantages:

- It can be installed on all FAAC automations: for swing, hydraulic and electromechanic, 230V e 24V;
- can be installed on existing FAAC installations without the need to modify the brackets or installation dimensions;
- allows you to automatically, and with extreme precision, set the deceleration and stop positions with no need for electric limit switches;
- allows you to prevent the motor from pushing against the mechanical stops and, consequently, increases the lifetime of the installation and avoids energy waste;
- allows you to eliminate mechanical travel stops by manually setting the stop positions, even for partial openings;
- avoids abnormal movements after power failure (the absolute encoder always keeps in memory the leaf position).



GREENtech: the most natural choice to save energy.

SAFE & GREEN is FAAC's safe and sustainable approach to the world of automation.

Effective solutions and systems are FAAC's answer to areas that have always been central to its philosophy:

- The safety of automation systems in compliance with the requirements of European Directives and current regulations.
- The reduction of energy consumption, with a reduced environmental impact and consequent cost savings for the end user.

green
tech

With GREENTECH, FAAC identifies systems and/or devices which are a combination of latest generation electronic control boards and mechanical innovations and innovative patented solutions that allow a significant reduction of energy consumption and on-going installation running costs such as:

- use of switching power supply devices with very high efficiency instead of traditional laminated or toroidal transformers on the control boards;
- opening and closing time optimising systems (Energy Saving) of pedestrian ways (automatic doors)
- control units that can enable stand-by modes to reduce power consumption when the automatic system is not in operation;

The aim is increased environmental friendliness and tangible advantages for the end user, stemming from the quantifiable reduction in energy costs for managing the automation system. All the above is achieved without jeopardising the high performance level of FAAC automated systems.

SIMPLY CONNECT

BE AUTOMATIC,
BE CONNECTED



MANAGE YOUR SYSTEMS
TODAY WITH A SIMPLE
TOUCH.

Simply Connect is the smart solution
that allows you to interact remotely with your automations,
at any time and from anywhere.

The Simply Connect logo is displayed on a laptop screen. The screen is tilted back, and a bright blue light emanates from the bottom of the screen, creating a sense of depth and energy. The logo itself is in a bold, white, sans-serif font, with 'SIMPLY' in a smaller size above 'CONNECT'. The background of the screen shows a dark, abstract pattern of blue lines and particles, suggesting a digital or network environment.

**SIMPLY
CONNECT**

Simply innovative. Simply practical. Simply FAAC.



Simply Connect PRO for the Professional

- Program without having to access the electronic control board
- Real-time fault and malfunction notifications
- Monitoring, also remotely
- Single dashboard for the management of all your automations
- Integrated calendar to improve appointment scheduling
- Improved service for your clients
- Lower operating costs

Simply Connect for the End User

- A single App to open, close and control all your automations from everywhere
- Users' access total control
- Real-time automation status and fault notifications
- Hands free function to open the automation

SAFE AND SECURE FOR EVERYONE

A communication protocol based on E2EE encryption (End-to-End Encryption) ensures the integrity and confidentiality of data in compliance with the personal data protection regulations indicated in GDPR 2016/679.

**Find out more
from page 163: products
and applications**

**SIMPLY
CONNECT**

www.faacsimplyconnect.com

THE FAAC KEYWORD: CERTIFIED QUALITY

Performance, reliability and price are the basic requirements behind each FAAC product.

To maintain the same high quality levels that have always characterised our products, the company continuously invests in technological innovation, production methods and organisation.

Certification is as important as innovation

At FAAC, every certification is at home, starting with the business process, attested by the UNI EN ISO 9001:2015 Quality Management System Certificate, the ISO 14001:2015 Environmental Management System Certificate, the ISO 45001:2023 Occupational Health and Safety Management System Certificate and the UNI/PdR 125:2022 Gender Equality Management System Certificate.

The most important certification is our DNA.

Our trademarks, patents and certifications all testify and confirm FAAC's unique business philosophy, which we have always considered "the most important certification of all". Continuous commitment to component and product quality, careful selection of suppliers, and scrupulous production process quality control, since 1965 have made the FAAC brand a worldwide by-word for high quality, reliability, conformity to standards and end user safety.



Innovation, one step after another.



Identifies those products with integrated FDS transmitter decoding system



Identifies the products with integrated universal radio coding system.



Identifies electronic control boards that enable simple, two-wire cabling of cascaded accessory installations based on a FAAC proprietary protocol.



Hydraulic operators with electric motor 24V.



Identifies the electronic board/automation compatible with optional modules that allow the automations to be controlled remotely. If the board is supplied as a standard component of an automation system, the product will be identified by this logo.



Identifies automatic doors fitted with a device that identifies the direction of movement and assesses a person's intention to go through the doorway, and uses this data to optimise opening and closing times and prevent needless loss of indoor air.

New FAAC price list.
Below a few indications as general consultation
guidelines.

Items included in the pack

Index

Automation kits	13	Automation for sliding gates	57
SAFE&GREEN Retrofit kit	14	C4000I	58
HANDY Start Kit 24V	15	740 E	60
ENERGY Start Kit 24V	15	740 C	62
ECO Start Kit 230V	16	741 E	64
TRENDY Start Kit 230V	16	741 C	66
CYCLO Start Kit 24V - C720	17	C720	68
CYCLO Start Kit 24V - C721	17	C721	70
DELTA 2 Start Kit 230V	18	746 C	72
DELTA 2 C Start Kit 230V	18	844 C	74
DELTA 3 C Start Kit 230V - 741 Safe	19	844 3PH	76
PRATICO Start Kit 230V	19	844 R Reversible	78
		884 MC 3PH	80
		C851	82
External automations for swing-leaf gates	20	Automations for sectional doors	85
392 C	22	D600	86
390 230V	24	D700 HS	88
412	26	D1000	90
413 230V	28		
415 230V	30	Automations for up and over doors	93
415 24V	32	D550	94
S418	34	580	96
402	36		
S450H	38	Automation for folding doors	99
422	40	390 230V	100
400	42	560	102
Automations for swing leaves with underground or integrated motor	45	Automatic Barriers	105
770N 230V	46	B614	106
770N 24V	48	615BPR	110
S800H ENC	50	620 Standard	114
S800 ENC	52	620 Rapid	118
S2500I	54	B680H	122
		115 AND WINTER OIL VERSIONS	126

Electronic control units	128		
Enclosures	129	433MHz XTO Omny System	174
E045S	132	433MHz RC System	178
E145S	134	Simple pulse generators	180
E045S LC	136	Electronic pulse generators	184
E145S LC	138	Pulse generators for special applications	187
E034	140	Additional power feeder	184
E124S	141	Adjustable wall photocells	188
740D	142	Wall or Flush mounted photocells	190
E721	143	XS Safety edge	191
578D	144	CN 60 E	193
E781S LC	145	Safety edge Radio System	194
780D	146	SAFEcoder	195
E844 3PH	147	Laser Sensors	196
E850S	148	M60 Electromechanical edge	197
E600 - E700 HS - E1000	149	FAAC SAFE PRO	198
540BPR	150	Flashing lights	199
200MPS	151	Consumables	200
E550S LC	152		
E614	153	Automations for spring balanced rolling shutters	201
615BPR	154	RL200	202
624BLD	155	RH200B	204
E680S	156	RH240	206
E4000I	157	RH240B	208
JE	158		
SAFEcoder	159	Access Control Systems	211
XUSB	160		
XLC	161	Traffic and high-security bollards	252
		J200 HA	254
Accessories for automations	162	J200 SA	256
Simply Connect devices	164	J200 F	258
Simply Connect applications	166	J275 HA V2	260
433-868MHz FDS System	168	J275 SA	262
433-868MHz FDS BD System	170	J275 F	264
868MHz XTO Omny System	172	J275 HA 2K20	266
		J275 F 2K20	258
		JS 48 HA	272

JS 48 R	274
JS 80 HA	276
JS 80 R	278
JS 80 F	280
Installation examples	284
Warranty conditions	308

AUTOMATION KITS

Index

SAFE&GREEN Retrofit kit	14
HANDY Start Kit 24V	15
ENERGY Start Kit 392 24V	15
ECO Start Kit 230V	16
TRENDY Start Kit 230V	16
CYCLO Start Kit 24V - C720	17
CYCLO Start Kit 24V - C721	17
DELTA2 Start Kit 230V	18
DELTA2 C Start Kit 230V	18
DELTA3 C Start Kit 230V	19
PRATICO Start Kit 230V	19

Typical Installation Examples page. 284

SAFE&GREEN Retrofit kit

Kit to upgrade the existing 230V
installations



- For electromechanical or hydraulic automations (excluding the following models: 390, 412 and 770N)



Pack SAFE&GREEN Retrofit kit E145S LC includes:

Q.ty	Description	Code
1	E145S LC control unit	790079
2	SAFEcoder BUS magnetic absolute encoder	404040



Model

SAFE&GREEN Retrofit kit E145S LC

Item code

390113

Kit automations for external swing-leaves

Max width single leaf

2,3 m

Use frequency

Continuous use

HANDY Start Kit 24V

Electro-mechanical operator 24V



Q.ty	Items included in the kit	Code
2	24V S418 Operators	10599893
1	E034 electronic control unit (cod.102011)	

Kit automations for external swing-leaves

Max width single leaf

0.5 - 2.5 m (with electric lock)

Use frequency (cycles/day)

continuous

ENERGY Start Kit 392 24V

Electro-mechanical operator 24V with articulated arm



Q.ty	Items included in the kit	Code
1	392 C Motor with electronic board and articulated arm	1045853
1	392 motor with articulated arm	

Kit automations for external swing-leaves

Max width single leaf

1.8 m

Use frequency (cycles/hour)

18

ECO Start Kit 230V

Electro-mechanical operator 230V



Q.ty	Items included in the kit	Code
1	412 RH operator	10563293
1	412 LH operator	
1	Enclosure Mod.E for electronic control units	

Kit automations for external swing-leaves

Max width single leaf

1.8 m

Use frequency

S3 - 30%

TRENDY Start Kit 230V

Electro-mechanical operator 230V



Q.ty	Items included in the kit	Code
2	413 - 230V Operators	10441993
1	Enclosure Mod.E for electronic control units	

Kit automations for
sliding leaves

CYCLO Start Kit 24V - C720

Electro-mechanical operator 24V

Max. leaf weight

400 Kg

Speed

18 m/min.

Use frequency

Continuous use



Q.ty	Items included in the kit	Code
1	C720 Gearmotor with incorporated electronic equipment	10599993
1	Foundation plate	

Kit automations for
sliding leaves

CYCLO Start Kit 24V - C721

Electro-mechanical operator 24V

Max. leaf weight

800 Kg

Speed

18 m/min.

Use frequency

Continuous use



Q.ty	Items included in the kit	Code
1	C721 Gearmotor with incorporated electronic equipment	10599994
1	Foundation plate	

Kit automations for sliding leaves

DELTA2 Start Kit 230V

Electro-mechanical operator 230V

Max. leaf weight

500 Kg

Speed

12 m/min.

Use frequency

30%



Q.ty	Items included in the kit	Code
1	740 E Z16 Gearmotor with incorporated electronic control unit	10563093
1	Foundation plate	

Kit automations for sliding leaves

DELTA2 C Start Kit 230V

Electro-mechanical operator 230V

Max. leaf weight

500 Kg

Max speed

12 m/min.

Use frequency (cycles/hour)

56



Q.ty	Items included in the kit	Code
1	740 C geramotor with built-in electronic control unit	10563094
1	Foundation plate	

Kit automations for
sliding leaves

DELTA3 C Start Kit 230V

Electro-mechanical operator 230V

Max. leaf weight

900 Kg

Max speed

12 m/min.

Use frequency (cycles/hour)

56



Q.ty	Items included in the kit	Code
1	741 C Z16 gearmotor with built-in electronic control unit and encoder	10565495
1	Foundation plate	

Kit automations for
sliding leaves

PRATICO Start Kit 230V

Hydraulic operator 230V

Max. leaf weight

400 - 600 Kg

Max speed

9,6 - 12 m/min.

Use frequency

Continuous use



Q.ty	Items included in the kit	Code
1	746 C Z16 gearmotor with built-in electronic control unit	105954
1	Foundation plate	

EXTERNAL AUTOMATIONS FOR SWING-LEAF GATES

EXTERNAL AUTOMATIONS FOR SWING-LEAF GATES

Type of installation

	392 C	390 230V	390 24 Vdc	412	413 230V	415 230V	415 24V	S418	402	422	S450H		
						415 L 230V	415 L 24V				422	400	S450H
	400												
Max leaf width (m)	2,50	3,00	3,00	1,80	2,50	3,00	3,00	2,70	1,80 (CBC)	1,80 (CBAC)	2,20 (CBC- CBAC- CBAC L)	2,00 (CBAC)	
						4,00 (L)	4,00 (L)			3,00 (SBS)	3,00 (SB)	4,00 (SB)	3,00 (SB)
											7,00 (SBS- SBS L)		

Typical Installation Examples page. 284



392 C

24V Electromechanical actuator with articulated arm



Max width single leaf

0.5 - 2.5 m (with
electric lock)

Use frequency
(cycles/day)

continuous

- The actuator features the innovative E034 electronic board, which can be programmed locally via display and button or via Simply Connect. It ensures simple yet versatile installation, offering two programming levels to best meet installation requirements and comply with regulatory standards.
- It is compatible with the optional XLC module, which reduces standby power consumption to 0.5W (2W with Simply Connect). It also supports alternative energy sources such as solar panels, while saving money and respecting the environment.
- Refurbished aesthetics characterised by essential, timeless lines



GREENtech
system:
392 24V + E034



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	392 C	392
Power supply voltage	220-240V~ 50/60 Hz	-
Electric motor	With brushes 24V 	
Max. torque	300 Nm (*)	
Max. angular speed	8,5 °/s (*)	
Max. leaf weight	See graphic A	
Max. leaf opening angle	120°	
Operating ambient temperature	-20 °C ÷ +65 °C	
Protection class	IP44	
Weight	11,7 Kg	9 Kg
Use frequency	Continuous use	
Max. leaf width	2,5 m with electric lock	
Dimensions (LxDxH)	183 x 256 x 304 mm	
Electronic equipment	built-in E034	-

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
392 C	104583
392	104584

PACKS

392 C includes: an electromechanical operator with built-in electronic control unit and transformer, an articulated arm, a release key.
392 includes: an electromechanical operator, an articulated arm, a release key.

Typical Installation Examples page. 285

ELECTRONIC CONTROL UNITS



E034 control unit with enclosure
Info at page 140

102011



E124S Electronic control unit with enclosure
Info at page 141

790305

ACCESSORIES



Low consumption kit XLC
Compatible with E034 control unit

390130



BUS XIB interface (for E045 or E045S or E034 boards with photocell no BUS)

790062




Emergency battery support kit ♦ (specific for E124S)

390926

>>

INSTALLATION DIMENSIONS (MM)

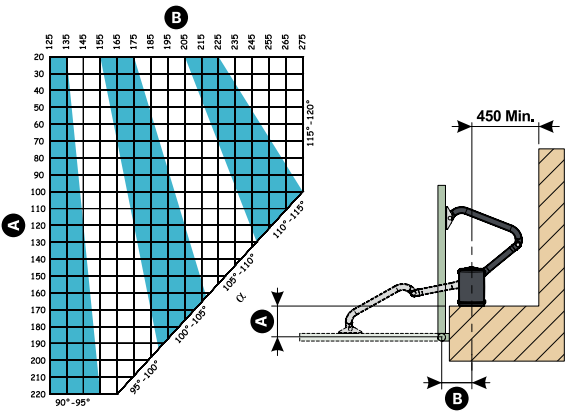

XK30 Key selector with lever release

391456



Kit for external release

424001



XBAT 24 emergency battery kit ♦

390923



Straight arm

390267

NOTE


IMPORTANT: to ensure correct operation, make sure that the distance between the gate hinge and any walls or lateral fencing is greater than 725 mm.

For a single-wing gate buy a 392 C actuator. For a double-wing gate buy a 392 C actuator and a 392 actuator.

- ♦ The 2 standard Pb batteries are not supplied by FAAC and must have voltage/current 12V/4Ah. Dimensions: 90X70X108 mm
- ♦ Not compatible with E124S control unit
- ♦ compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

For any other configuration please refer to the technical manual

GRAPHIC A

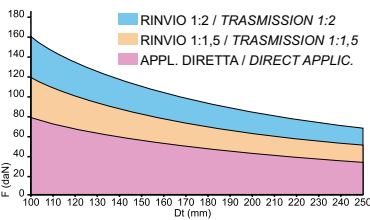

The leaf weight depends on its length. Verify through Graph A that the leaf involved falls within the highlighted section of the graph.

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



390 230V

230V Electromechanical actuator with articulated arm



Max width single leaf

1,8 - 3 m (with electric
lock)

Use frequency

S3 - 30%

- Non reversing operator, does not require electric lock up to 1,8 m.
- Suitable for large pillars installations, thanks to the articulated arm.
- Manual release device which can be activated from inside or outside the property.



GREENTech 230V
system:
390 230V + E045S
or E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	390 230V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	280 W
Max. torque	250 Nm (*)
Max. angular speed	8 °/s (*)
Max. leaf opening angle	120°
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	140°C
Protection class	IP44
Weight	11.5 Kg
Use frequency	S3 - 30%
Max. leaf width	1.8 m (3 m with electric lock)
Dimensions (LxDxH)	412 x 133 x 134 mm
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
390 230V	104570

PACKS

390 230V includes: an electromechanical operator, accessories for installation, a thrust capacitor 8μF 400V, a release key.

Typical Installation Examples page. 285

ELECTRONIC CONTROL UNITS



E145S control unit
Info at page 134

790076



E045S control unit
Info at page 132

790077

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for
electronic control units

720118



Enclosure mod. E for
electronic control units

720119



Enclosure mod. LM for
electronic control units

720309

>>



Jointed arm

738705



External release
device with cable and
sheath
Length 5 m

401057



Single limit switch kit
(opening or closing)

390682




BUS XIB interface
(for E045 or E045S
boards with photocell
no BUS)

790062


INSTALLATION DIMENSIONS (MM)

Inward opening



	A	B	C (max)
α 90°	60 - 110	110 - 130	730
	110 - 160	110 - 130	720
	160 - 210	110 - 130	710
	210 - 260	110 - 130	700
	260 - 310	110 - 130	690
	310 - 360	110 - 130	670
α 120°	60 - 110	110 - 130	650
	110 - 160	190 - 210	600
	160 - 210	290 - 310	540
	210 - 260	310 - 330	510

Outward opening



	A	B	C (max)
α 90°	60 - 110	110 - 130	430
	110 - 160	110 - 130	380
	160 - 210	110 - 130	330
	210 - 260	110 - 130	280
	260 - 310	110 - 130	240

For any other configuration please refer to the technical manual

NOTE

IMPORTANT: the 390 operators must be provided with a jointed arm (swing gate) or with a telescopic arm (for folding doors).
IMPORTANT: to ensure correct operation, make sure that the distance between the gate hinge and any wall does not exceed 300 mm.
For a two-leaf gate, provide two operators, two jointed arms and electronic control unit.
The 390 operators can be equipped with an opening and a closing limit switch
For management of the limit switches on the 390, you need to use the E145S board.
 : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



412

230V Electromechanical operator

Max width single leaf

1.8 m

Use frequency (cycles/hour)

18



- Non reversing operator, does not require electric lock.
- Easy installation and maintenance.
- Lever release device on the rear side of the operator.



**230V SAFEzone
system:**
412 + E045S or E145S
+ SAFEcoder



**GREENtech 230V
system:**
412 + E045S or
E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	412 RH	412 LH
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	Asynchronous single phase	
Max. power	280 W	
Max expressed force	3500 N (*)	
Rod max speed	16 mm/s (*)	
Rod travel	290 mm	
Max. leaf opening angle	110°	
Operating ambient temperature	-20°C ÷ + 55°C	
Thermal protection	140°C	
Protection class	IP44	
Weight	6.5 Kg	
Use frequency	18 cycles/hour	
Max. leaf width	1.8 m	
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded	
Dimensions (LxDxH)	991 x 101 x 172 mm	
Electronic equipment	Not included	

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
412 RH	104470
412 LH	104471

PACKS

412 RH/LH includes: an electromechanical operator (RH or LH), installation accessories, a release key, a 400V 8μF thrust capacitor.

Typical Installation Examples page. 286

ELECTRONIC CONTROL UNITS



E145S control unit
Info at page 134

790076



E045S control unit
Info at page 132

790077

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for electronic control units

720118



Enclosure mod. E for electronic control units

720119



Enclosure mod. LM for electronic control units

720309

>>



Plate to be welded

737604



Pair of supplementary release keys

713009



SAFEcoder (BUS magnetic absolute encoder) for 412 operator (FAAC Patent)


404041



BUS XIB interface (for E045 or E045S boards with photocell no BUS)

790062

INSTALLATION DIMENSIONS (MM)

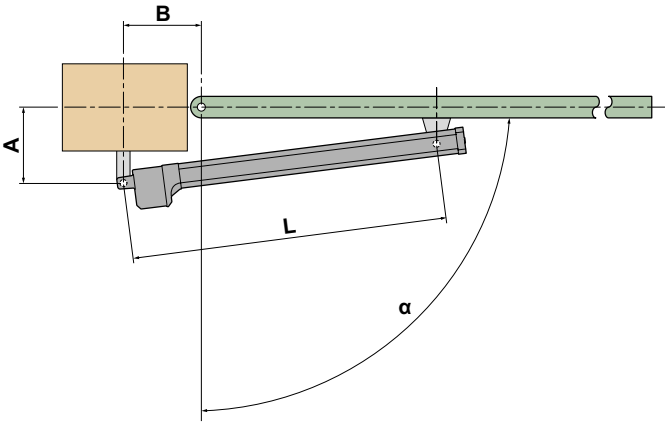

α	A	B	L
90°	145	145	892
110°	125	125	

NOTE

The version for right leaves (RH and LH) is determined looking at the gate from inside the property.
PROGRESS: compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

For any other configuration please refer to the technical manual

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



413 230V

230V Electromechanical operator



Max width single leaf

1,8 - 2,5 m (with
electric lock)

Use frequency

30%

- “Off axis” thrust operator.
- Opening and closing mechanical stops included.
- Horizontal exit for cables to allow near to ground installation (low installation).



**230V SAFEzone
system:**
413 230V + E045S or
E145S + SAFEcoder



**GREENtech 230V
system:**
413 230V + E045S
or E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	413 230V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	250 W
Max expressed force	2000 N (*)
Rod max speed	16 mm/s (*)
Rod travel	300 mm (350 mm without mechanical stops)
Max. leaf opening angle	110°
Operating ambient temperature	-20°C ÷ + 55°C
Thermal protection	140°C
Protection class	IP54
Weight	7.8 Kg
Use frequency	S3 - 30%
Max. leaf width	1,8 m (2,5 with electric lock)
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded
Dimensions (LxDxH)	777 x 101 x 152 mm
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz

FAMILY MODELS

Model	Item code
413 230V	104413

PACKS

413 230V includes: an electromechanical operator, installation accessories, a release key, a 400V 6.3μF thrust capacitor. The LS version includes the electric limit switches.

Typical Installation Examples page. 286

ELECTRONIC CONTROL UNITS



E145S control unit
Info at page 134

790076



E045S control unit
Info at page 132

790077

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for
electronic control units

720118



Enclosure mod. E for
electronic control units

720119



Enclosure mod. LM for
electronic control units

720309

>>



Plate to be walled

737604



SAFEcoder BUS
magnetic absolute
encoder
(FAAC Patent)

404040



BUS XIB interface
(for E045 or E045S
boards with photocell
no BUS)


790062



Screwable rear
brackets (kit of 2pcs.)

490349

INSTALLATION DIMENSIONS (MM)

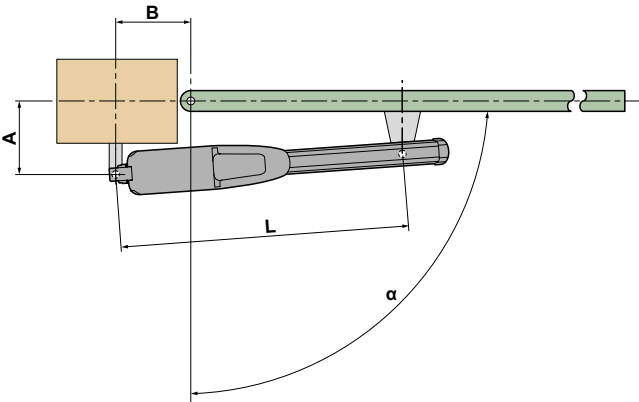

NOTE

 : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

	α	A	B	L
413 with opening and closing stops	90°	140	140	675
	110°	120	135	
413 with opening stop	90°	150	150	690
	110°	135	135	
413 without opening and closing stops	90°	160	160	690
	110°	145	145	

For any other configuration please refer to the technical manual

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200



415 230V

230V Electromechanical operator

Max width single leaf

2,5 - 4 m (with electric lock)

Use frequency

S3 - 30%



- “In-axis” thrust operator.
- Available in versions with a 300 mm (max leaf 3 m) and 400 mm (max leaf 4 m) rod stroke.
- Horizontal exit for cables to allow near to ground installation (low installation).



230V SAFEzone system:
415 230V + E045S or
E145S + SAFEcoder



GREENtech 230V system:
415 230V + E045S
or E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	415	415 L
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	Asynchronous single phase	
Max. power	300 W	
Max expressed force	3000 N (*)	
Rod max speed	16 mm/s (*)	
Rod travel	300 mm	400 mm
Max. leaf opening angle	110°	
Operating ambient temperature	-20°C ÷ +55°C	
Thermal protection	140°C	
Protection class	IP54	
Weight	7.8 Kg	8 Kg
Use frequency	S3 - 30%	
Max. leaf width	2.5 m (3 m with electric lock)	3 m (4 m with electric lock)
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded	
Dimensions (LxDxH)	836 x 101 x 147 mm	942 x 101 x 148 mm
Electronic equipment	Not included	

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
415	104415
415 L	104417

PACKS

415 230V includes: an electro-mechanical operator, installation accessories, a release key, a 400V 8μF thrust capacitor.

Typical Installation Examples page. 287

ELECTRONIC CONTROL UNITS



E145S control unit
Info at page 134

790076



E045S control unit
Info at page 132

790077

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for electronic control units

720118



Enclosure mod. E for electronic control units

720119



Enclosure mod. LM for electronic control units

720309

>>



Plate to be walled

737604



SAFEcoder BUS magnetic absolute encoder (FAAC Patent)

404040



BUS XIB interface (for E045 or E045S or E034 boards with photocell no BUS)

790062



Shaft cover for mod. 415 with rod stroke 300 mm


727525



Screwable rear brackets (kit of 2pcs.)

490349

INSTALLATION DIMENSIONS (MM)

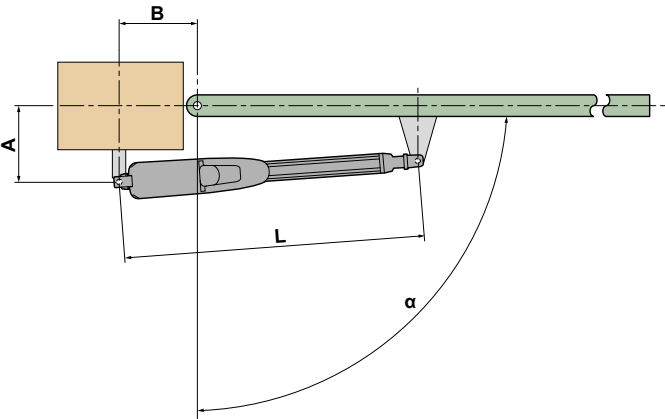

	α	A	B	L
415	90°	145	145	1110
	110°	120	135	
415 L	90°	195	195	1290
	110°	170	170	

For any other configuration please refer to the technical manual

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



415 24V

24V Electromechanical operator



Max width single leaf

2,5 - 4 m (with electric lock)

Use frequency

Continuous use

- “In-axis” thrust operator.
- Available in versions with a 300 mm (max leaf 3 m) and 400 mm (max leaf 4 m) rod stroke.
- Horizontal exit for cables to allow near to ground installation (low installation).



24V SAFEzone system:
415 24V + E034 or E124S



24V GREENtech system:
415 24V + E124S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	415 24V	415 L 24V
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	With brushes 24V 	
Max. power	70 W	
Max expressed force	2800 N	
Rod max speed	16 mm/s	
Rod travel	300 mm	400 mm
Max. leaf opening angle	110°	
Operating ambient temperature	-20°C ÷ +55°C	
Protection class	IP54	
Weight	7.8 Kg	8 Kg
Use frequency	Continuous use	
Max. leaf width	2,5 m (3 with electric lock)	3 m (4 with electric lock)
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded	
Dimensions (LxDxH)	836 x 101 x 147 mm	942 x 101 x 148 mm
Electronic equipment	Not included	

FAMILY MODELS

Model	Item code
415 24V	1044151
415 L 24V	1044171

PACKS

415 24V includes: an electromechanical actuator, installation accessories and a release key.

Typical Installation Examples page. 287

ELECTRONIC CONTROL UNITS



E034 control unit with enclosure
Info at page 140

102011



E124S Electronic control unit with enclosure
Info at page 141

790305

ACCESSORIES



Low consumption kit XLC
Compatible with E034 control unit

390130



XBAT 24 emergency battery kit ♦

390923



Emergency battery support kit ♦
(specific for E124S)

390926

>>



Plate to be walled

737604



BUS XIB interface
(for E045 or E045S or E034 boards with photocell no BUS)

790062



Shaft cover for mod. 415 with rod stroke 300 mm


727525



Screwable rear brackets (kit of 2pcs.)

490349

INSTALLATION DIMENSIONS (MM)

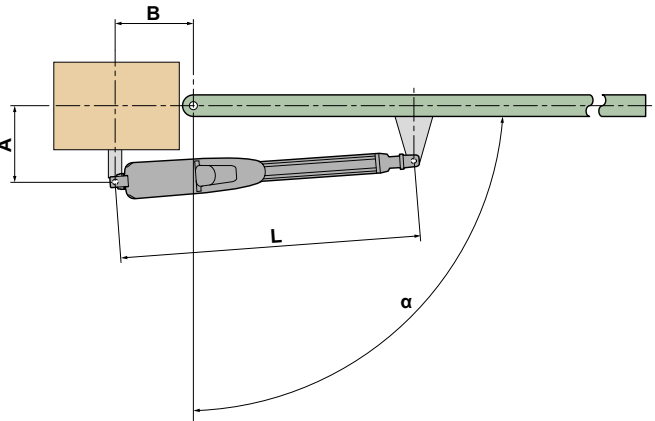

	α	A	B	L
415	90°	145	145	1110
	110°	120	135	
415 L	90°	195	195	1290
	110°	170	170	

For any other configuration please refer to the technical manual

NOTE

- ♦ Not compatible with E124S control unit
- ♦ The 2 standard Pb batteries are not supplied by FAAC and must have voltage/current 12V/4Ah. Dimensions: 90X70X108 mm
- : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200
-------------------	----------------------------------	--------------------------	--	------------------------------------	-----------------------------	---------------------------------



S418

24V Electromechanical operator

Max width single leaf

2,3 - 2,7 m (with
electric lock)

Use frequency

Continuous use



- Adjustable high speed.
- New "multi-position" fixing bracket for non-welded installation.
- Integrated opening and closing mechanical stops (possibility to avoid anti-crushing device installation).



**24V SAFEzone
system:**
S418 + E034 or E124S



**24V GREENTech
system:**
S418 + E124S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	S418 24V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	With brushes 24V 
Max. power	35 W
Max expressed force	1800 N
Rod max speed	37 mm/s (con E124)
Rod travel	350 mm (390 mm without stops)
Max. leaf opening angle	110°
Operating ambient temperature	-20°C ÷ + 55°C
Protection class	IP54
Weight	6 Kg
Use frequency	Continuous use
Max. leaf width	2.3 m (2.7 m with electric lock)
Mounting brackets	Rear attachment to be screwed and adjustable - front attachment to be screwed and adjustable
Dimensions (LxDxH)	823 x 104 x 137 mm
Electronic equipment	Not included

FAMILY MODELS

Model	Item code
S418 24V	104301

PACKS

S418 includes: an electromechanical operator, accessories for installation, a release key.

Typical Installation Examples page. 288

ELECTRONIC CONTROL UNITS



E034 control unit with enclosure
Info at page 140

102011



E124S Electronic control unit with enclosure
Info at page 141

790305

ACCESSORIES



Low consumption kit XLC
Compatible with E034 control unit

390130



XBAT 24 emergency battery kit ♦

390923



Emergency battery support kit ♦
(specific for E124S)

390926

>>




BUS XIB interface
(for E045 or E045S or E034 boards with photocell no BUS)

790062

NOTE

- ♦ Not compatible with E124S control unit
- ♦ The 2 standard Pb batteries are not supplied by FAAC and must have voltage/current 12V/4Ah. Dimensions: 90X70X108 mm
- : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

INSTALLATION DIMENSIONS (MM)

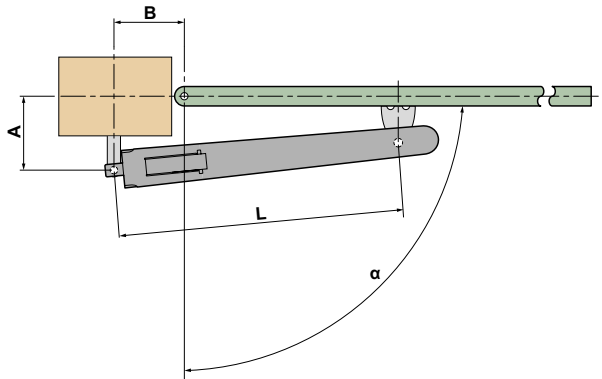

	α	A	B	L
S 418 with opening and closing stops	90°	165	165	690
		175	175	
	110°	150	150	
S 418 with opening stops	90°	175	165	708
		180	180	
	110°	160	160	
S 418 without opening and closing stops	90°	180	180	708
	110°	170	170	

For any other configuration please refer to the technical manual

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



402

230V Hydraulic operator



Max width single leaf

1,8 - 3 m (with electric lock)

Use frequency (cycles/hour)

55

- Highly compact, ideal for installations where space is at a premium.
- Anti-corrosion cover with high weather resistance.
- CBC versions (with lock in closing) and SBS (slower operation for larger gate).



SAFEzone system:
402 + E045S or E145S
+ SAFEcoder



GREENtech system:
402 + E045S or
E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	402 CBC	402 SBS
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	Asynchronous single phase	
Max. power	220 W	
Max expressed force	5000 N (*)	6900 N (*)
Rod max speed	13 mm/s (*)	10 mm/s (*)
Motor-pump unit capacity	1 lpm (*)	0,75 lpm (*)
Rod travel	250 mm	
Max. leaf opening angle	110°	
Operating ambient temperature	-20°C ÷ + 55°C	
Thermal protection	120°C	
Protection class	IP55	
Weight	6.5 Kg	
Use frequency	55 cycles/hour	
Max. leaf width	1.80 m	3 m (with electric lock)
Type of oil	FAAC HP OIL	
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded	
Dimensions (LxDxH)	959 x 85 x 85 mm	
Electronic equipment	Not included	

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
402 CBC	104468
402 SBS	104474

PACKS

402 CBC includes: a hydraulic operator with hydraulic lock in opening/closing, installation accessories, a triangular release key, a 400V 8μF thrust capacitor.

402 SBS includes: a hydraulic operator without closing hydraulic lock, installation accessories, a triangular release key, a 400V 8μF thrust capacitor.

Typical Installation Examples page. 288

ELECTRONIC CONTROL UNITS



E145S control unit
Info at page 134

790076



E045S control unit
Info at page 132

790077

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for
electronic control units

720118



Enclosure mod. E for
electronic control units

720119



Enclosure mod. LM for
electronic control units

720309

>>



Plate to be walled

737604



Supplementary
triangular release key
(10 pcs. pack)

713002



SAFEcoder BUS
magnetic absolute
encoder
(FAAC Patent)

404040



BUS XIB interface
(for E045 or E045S
or E034 boards with
photocell no BUS)


790062



Screwable rear
brackets (kit of 2pcs.)

490349

INSTALLATION DIMENSIONS (MM)

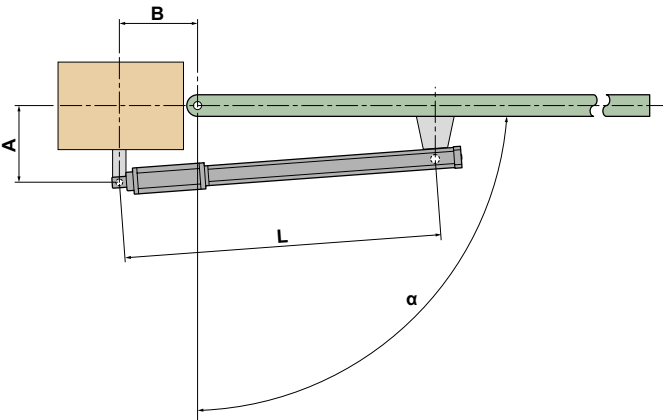

	α	A	B	L
402	90°	120	120	910
	100°	100	100	

For any other configuration please refer to the technical manual

NOTE

An electric lock should be installed for operators without hydraulic lock.
 : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

S450H

24V Hydraulic operator



Max width single leaf

2 - 3 m

Use frequency

Continuous use



- Hybrid Technology (Hydraulic + 24V).
- Integrated encoder SAFEcoder with anti-crushing function and reverse upon obstacle detection.
- Opening and closing mechanical stops included.



**24V SAFEzone
system:**
S450H + E034 or
E124S



**24V GREENtech
system:**
S450H + E124S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	S450H CBAC	S450H SB
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	With brushes 24V 	
Max. power	60 W	
Max expressed force	> 5000 N	
Rod max speed	>25 mm/sec	
Rod travel	311 mm	
Max. leaf opening angle	110°	
Operating ambient temperature	-20°C ÷ +55°C	
Protection class	IP55	
Weight	6.5 Kg	
Use frequency	Continuous use	
Max. leaf width	2 m	3 m
Type of oil	FAAC HP OIL	
Mounting brackets	Rear multi-position bracket to be screwed - front adjustable to be screwed	
Dimensions (LxDxH)	1131 x 85 x 119 mm	
Electronic equipment	Not included	

FAMILY MODELS

Model	Item code
S450H CBAC	104100
S450H SB	104101

PACKS

S450H includes: a hydraulic operator, accessories for installation, a release key.

Typical Installation Examples page. 289

ELECTRONIC CONTROL UNITS



E124S Electronic control unit with enclosure
Info at page 141

790305

ACCESSORIES



XBAT 24 emergency battery kit ♦

390923



Emergency battery support kit ♦
(specific for E124S)

390926



BUS XIB interface
(for E045 or E045S or E034 boards with photocell no BUS)

790062

NOTE


♦ The 2 standard Pb batteries are not supplied by FAAC and must have voltage/current 12V/4Ah. Dimensions: 90X70X108 mm
♦ : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module



Release lock with customised key

712501001-10

INSTALLATION DIMENSIONS (MM)

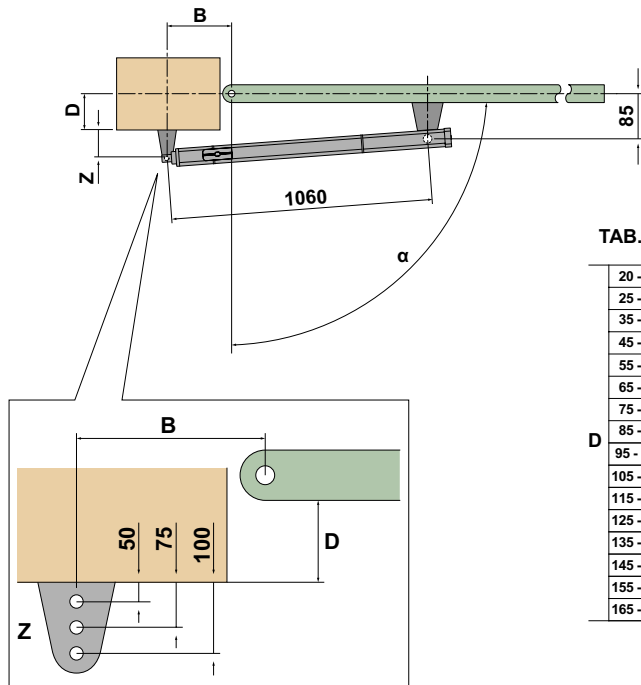

For any other configuration please refer to the technical manual

TAB. 1	B										
	75 - 84	85 - 94	95 - 104	105 - 114	115 - 124	125 - 134	135 - 144	145 - 154	155 - 164	165 - 175	
20 - 24					110° (3)	110° (3)	115° (3)	108° (3)	100° (3)	100° (3)	
25 - 34					108° (3)	110° (3)	110° (3)	103° (3)	100° (3)	94° (3)	
35 - 44				100° (3)	107° (3)	108° (3)	104° (3)	111° (2)	104° (2)	100° (2)	
45 - 54				100° (3)	105° (3)	106° (3)	100° (3)	106° (2)	100° (2)	96° (2)	
55 - 64			97° (3)	100° (3)	105° (3)	99° (3)	107° (2)	100° (2)	96° (2)	92° (2)	
65 - 74		93° (3)	97° (3)	100° (3)	100° (3)	110° (2)	101° (2)	96° (2)	102° (1)	98° (1)	
75 - 84		90° (3)	95° (3)	100° (3)	105° (2)	102° (2)	111° (1)	105° (1)	98° (1)	94° (1)	
85 - 94	90° (3)	90° (3)	95° (3)	100° (2)	104° (2)	96° (2)	104° (1)	100° (1)	94° (1)	90° (1)	
95 - 104	90° (3)	90° (3)	95° (3)	100° (2)	96° (2)	106° (1)	98° (1)	96° (1)	90° (1)		
105 - 114	90° (3)	90° (3)	95° (2)	97° (2)	103° (1)	99° (1)	94° (1)	92° (1)			
115 - 124	90° (3)	90° (2)	95° (2)	98° (1)	100° (1)	94° (1)					
125 - 134	90° (2)	90° (2)	95° (1)	98° (1)	94° (1)						
135 - 144	90° (2)	90° (2)	95° (1)	94° (1)							
145 - 154	90° (1)	90° (1)	94° (1)								
155 - 164	90° (1)	90° (1)									
165 - 170	90° (1)										

α (3)
100° (3)

α (2)
100° (2)

α (1)
100° (1)

Hole to be used on the rear bracket

OTHER ACCESSORIES

Key operated buttons
page 178

Safety edges
page 189

Transmitters and receivers
page 167

Photocells and columns
page 186

Flashing lights
page 197

Various accessories
page 198

230V Hydraulic operator



Max width single leaf

1,8 - 3 m (with electric
lock)

Use frequency (cycles/hour)

55



- Key-protected, release device
- Anti-corrosion cover with high weather resistance.
- CBC versions (with lock in closing) and SBS (slower operation for larger gate).



**230V SAFEzone
system:**
422 + E045S or E145S
+ SAFEcoder



**GREENtech 230V
system:**
422 + E045S or
E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	422 CBAC	422 SB
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	Asynchronous single phase	
Max. power	220 W	
Max expressed force	5000 N (*)	
Rod max speed	13 mm/s (*)	
Motor-pump unit capacity	1 lpm (*)	
Rod travel	250 mm	
Max. leaf opening angle	110°	
Operating ambient temperature	-20°C ÷ + 55°C	
Thermal protection	120°C	
Protection class	IP55	
Weight	7 Kg	
Use frequency	55 cycles/hour	
Max. leaf width	1.8 m	3,00 m (with electric lock)
Type of oil	FAAC HP OIL	
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded	
Dimensions (LxDxH)	987 x 85 x 119 mm	
Electronic equipment	Not included	

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
422 CBAC	104200
422 SB	104212

PACKS

422 includes: a hydraulic actuator with hydraulic opening/closing lock (**422 CBAC**), without lock (**422 SB**), installation accessories, a release key, a 8µF 400V thrust capacitor.

Typical Installation Examples page. 289

ELECTRONIC CONTROL UNITS



E145S control unit
Info at page 134

790076



E045S control unit
Info at page 132

790077

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for
electronic control units

720118



Enclosure mod. E for
electronic control units

720119



Enclosure mod. LM for
electronic control units

720309

>>



BUS XIB interface
(for E045 or E045S
or E034 boards with
photocell no BUS)

790062



Release lock with
customised key

712501001-10



SAFEcoder BUS
magnetic absolute
encoder
(FAAC Patent)

404040



Plate to be walled


737604



Screwable rear
brackets (kit of 2pcs.)

490349

INSTALLATION DIMENSIONS (MM)

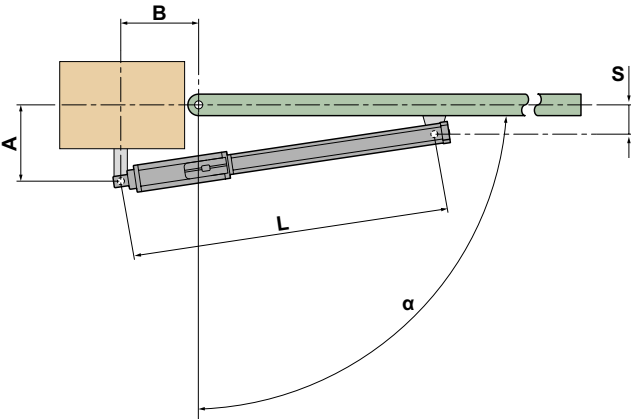

NOTE

An electric lock should be installed for operators without hydraulic lock.
Availability: compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

S = 20		B						
		80	90	100	110	120	130	140
A	100	95°	100°	105°	105°	100°	95°	90°
	110	95°	100°	105°	100°	95°	90°	
	120	95°	100°	100°	95°	90°	85°	
	130	95°	100°	95°	90°	85°		
	140	95°	95°	90°				
	150	95°	85°					
	160	85°						

For any other configuration please refer to the technical manual

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

400

230V Hydraulic operator



Max width single leaf

2,2 - 7 m (with electric
lock)

Use frequency (cycles/hour)

50 - 70



- Key-protected, release device
- Extremely silent movement.
- Hydraulic lock resistant to intrusion attempts (mod. CBC - CBAC).



**230V SAFEzone
system:**
400 + E045S or E145S
+ SAFEcoder



**GREENtech 230V
system:**
400 + E045S or
E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	400 CBC	400 SB	400 SBS	400 CBAC	400 CBAC L	400 SBS L
Power supply voltage	220-240V~ 50/60 Hz					
Electric motor	Asynchronous single phase					
Max. power	220 W					
Max expressed force	6200 N (*)		7750 N (*)	6200 N (*)	4650 N (*)	7750 N (*)
Rod max speed	10 mm/s (*)		7,5 mm/s (*)	10 mm/s (*)	15 mm/s (*)	7,5 mm/s (*)
Motor-pump unit capacity	1 lpm (*)		0,75 lpm (*)	1 lpm (*)	1,5 lpm (*)	0,75 lpm (*)
Rod travel	270 mm			390 mm		
Max. leaf opening angle	125°					
Operating ambient temperature	-20°C ÷ + 55°C					
Thermal protection	120°C					
Protection class	IP55					
Weight	8.6 Kg			10 kg		
Use frequency	70 cycles/hour		60 cycles/hour	70 cycles/hour	50 cycles/hour	40 cycles/hour
Max. leaf width	2.20 m	4,00 m (with electric lock)	7,00 m (with electric lock)	2.20 m		7,00 m (with electric lock)
Type of oil	FAAC HP OIL					
Mounting brackets	Rear attachment to be welded/screwed - front attachment to be welded					
Dimensions (LxDxH)	1034 x 85 x 119 mm			1277 x 85 x 119 mm		
Electronic equipment	Not included					

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
400 CBC	104205
400 SB	104206
400 SBS	104203
400 CBAC	104201
400 CBAC L	104202
400 SBS L	104220

PACKS

400 includes: a hydraulic operator with hydraulic lock in closing (**400 CBC**), without lock (**400 SB**), without hydraulic block for heavy leaves (**400 SBS and 400 SBS L**), a hydraulic operator with hydraulic lock in opening/closing (**400 CBAC and CBAC L**), installation accessories, a release key, a 400V 8μF thrust capacitor.

Typical Installation Examples page. 290

ELECTRONIC CONTROL UNITS



E145S control unit
Info at page 134

790076



E045S control unit
Info at page 132

790077

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for electronic control units

720118



Enclosure mod. E for electronic control units

720119



Enclosure mod. LM for electronic control units

720309

>>



Plate to be walled

737604



SAFEcoder BUS magnetic absolute encoder (FAAC Patent)

404040




BUS XIB interface (for E045 or E045S or E034 boards with photocell no BUS)

790062




Release lock with customised key

712501001-10



Positive Stop - mechanical stops op/cl (can be integrated on mod. 400)

490042



Positive Stop - mechanical stops op/cl (can be integrated on mod. 400 CBAC L)

490043

>>




Screwable rear brackets (kit of 2pcs.)

490349

NOTE

An electric lock should be installed for operators without hydraulic locking. The 400 L models avoid the use of niches in masonry pillars (FIG.1). The operator with lock is not recommended when there is no access to the manual release device (panelled leaves or no other access to the property). **Accessories** : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

INSTALLATION DIMENSIONS (MM)

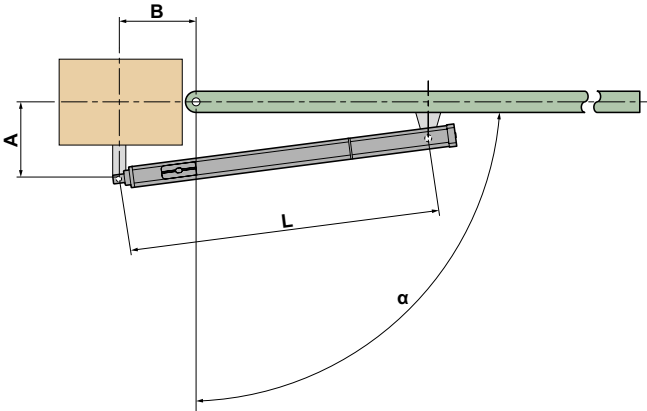

	α	A	B	L
400	90°	130	130	960
	115°	100	120	
	125°	90	120	
400 L	90°	200	160	1200
	115°	170	160	
	125°	130	170	

For any other configuration please refer to the technical manual

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



AUTOMATIONS FOR SWING LEAVES WITH UNDERGROUND MOTOR

AUTOMATIONS FOR SWING LEAVES WITH UNDERGROUND MOTOR

Type of installation

	770N 230V	770N 24V	S800H ENC	S800 ENC	S2500I
			S800H ENC	S800 ENC	S2500I
Max. leaf width (m)	3,50	3,50	2,00 (CBAC)	2,00 (CBAC)	250
			4,00 (SBW)	4,00 (SBW)	
Max. leaf weight (kg)	500	500	800	800	250

Typical Installation Examples page. 290

Automations for swing leaves with underground motor



770N 230V

Underground electromechanical operator

Max width single leaf

2 - 3,5 m (with electric lock)

Max weight

500 Kg

Use frequency

S3 - 30%



- Invisible operator
- Access to the operator is possible without removing the leaf
- Manual release with double lever accessible both from inside and outside of the property (Patented)



230V SAFEzone system:
770N 230V + E045S or E145S + SAFEcoder



GREENtech 230V system:
770N 230V + E045S or E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	770N 230V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	380 W
Max. torque	330 Nm (*)
Max. angular speed	6 °/s (*)
Max. leaf weight	500 Kg (see graph)
Max. leaf opening angle	110° (140° and 180° with optional kit)
Operating ambient temperature	-20°C ÷ + 55°C
Thermal protection	140°C
Protection class	IP67
Weight	12 Kg (with foundation box 14 Kg)
Use frequency	S3 30%
Max. leaf width	2 m (3.5 m with electric lock)
Dimensions (LxDxH)	362 x 153 x 127 (foundation box 430 x 307,5 x 214) mm
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
770N 230V	10675201

PACKS

770N 230V includes: an electromechanical operator, installation accessories, two release keys, a 400V 12.5µF thrust capacitor.
Foundation box includes: a foundation box, a stainless steel lid, a leaf supporting bracket equipped with a lever release system, two release keys and installation accessories.

Typical Installation Examples page. 290

ELECTRONIC CONTROL UNITS



E045S control unit
Info at page 132



E145S control unit
Info at page 134

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for electronic control units



Enclosure mod. E for electronic control units



Enclosure mod. LM for electronic control units

790077

790076

720118

720119

720309

>>



Encoder unit for 770N



BUS XIB interface
(for E045 or E045S or E034 boards with photocell no BUS)



Stainless steel foundation box with release system (Patented)



Galvanised foundation box with release system (Patented)



Foundation box with release system (Patented)



Release lock with customised key

404035

790062

490110

490361

490065

712104001-10

>>

INSTALLATION DIMENSIONS (MM)



Opening to 180° kit



Internal opening mechanical stop



Internal closing mechanical stop




Opening to 140° kit

490111

722121

722122

390612





NOTE

ATTENTION: The operator 770N must be supplied with a foundation box. For a two-leaf gate, provide two operators, two foundation boxes and electronic control unit.

770N : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

GRAPHIC

Anta m	Kg
0	500
0,5	500
1	500
1,25	500
1,5	500
1,8	480
2	300
2,25	250
2,5	240
3	230
3,5	220

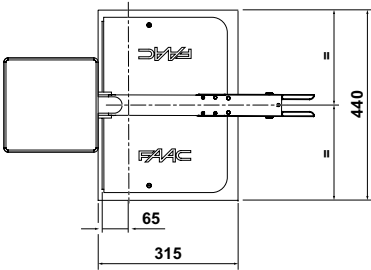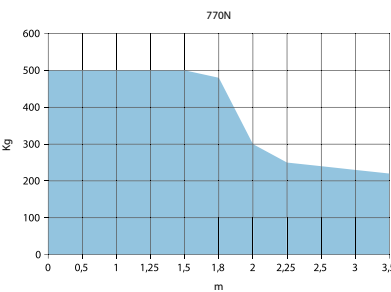

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



770N 24V

Underground electromechanical operator



Max width single leaf

2 - 3,5 m (with electric lock)

Max weight

500 Kg

Use frequency

Continuous use

- Invisible operator.
- Anti-crushing device and virtual encoder with inversion on obstacles.
- Manual release with double lever accessible both from inside and outside of the property (Patented).



24V SAFEzone system:
770N 24V + E034 or E124S



24V GREENTech system:
770N 24V + E124S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	770N 24V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	With brushes 24V
Max. power	70 W
Max. torque	330 Nm
Max. angular speed	6 °/s
Max. leaf weight	500 Kg (see graph)
Max. leaf opening angle	110° (140° and 180° with optional kit)
Operating ambient temperature	-20°C ÷ + 55°C
Protection class	IP67
Weight	12 Kg (with foundation box 14 Kg)
Use frequency	Continuous use
Max. leaf width	2 m (3.5 m with electric lock)
Dimensions (LxDxH)	362 x 153 x 127 (foundation box 430 x 307,5 x 214) mm
Electronic equipment	Not included

FAMILY MODELS

Model	Item code
770N 24V	10675301

PACKS

770N 24V includes: an electromechanical operator, installation accessories, two release keys.

Foundation box includes: a foundation box, a stainless steel lid, a leaf supporting bracket equipped with a lever release system, two release keys and installation accessories.

Typical Installation Examples page. 281

ELECTRONIC CONTROL UNITS



E034 control unit with enclosure
Info at page 140

102011



E124S Electronic control unit with enclosure
Info at page 141

790305

ACCESSORIES



Low consumption kit XLC
Compatible with E034 control unit

390130



XBAT 24 emergency battery kit ♦

390923



Emergency battery support kit ♦
(specific for E124S)

390926

>>



Encoder unit for 770N

404035



BUS XIB interface
(for E045 or E045S or E034 boards with photocell no BUS)

790062



Stainless steel foundation box with release system (Patented)

490110



Galvanised foundation box with release system (Patented)

490361



Foundation box with release system (Patented)

490065



Release lock with customised key

712104001-10

>>

INSTALLATION DIMENSIONS (MM)



Opening to 180° kit

490111



Internal opening mechanical stop

722121




Internal closing mechanical stop

722122



Opening to 140° kit

390612



NOTE



ATTENTION: The operator 770N must be supplied with a foundation box.
For a two-leaf gate, provide two operators, two foundation boxes and electronic control unit.

- ♦ Not compatible with E124S control unit
- ♦ The 2 standard Pb batteries are not supplied by FAAC and must have voltage/current 12V/4Ah. Dimensions: 90X70X108 mm

♦ : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

GRAPHIC

Anta m	Kg
0	500
0,5	500
1	500
1,25	500
1,5	500
1,8	480
2	280
2,25	220
2,5	200
3	190
3,5	180

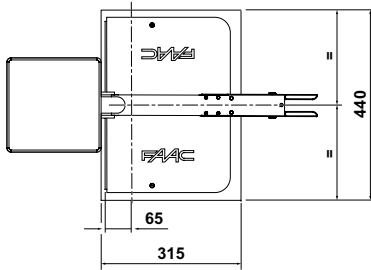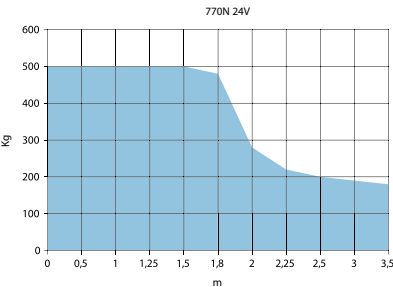

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



S800H ENC

24V Underground hydraulic operator



Max width single leaf

2 - 4 m

Max weight

800 Kg

Use frequency

Continuous use

- Underground operator with hydraulic technology 24V.
- Absolute magnetic encoder (for ENC models) with integrated BUS 2easy (non polarized two wires connection).
- Integrated Positive Stops, possibility to avoid mechanical stops installation. **FAAC Patent.**



24V **SAFEzone** system:
S800H ENC + E034 or E124S



24V **greentech** system:
S800H ENC + E124S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	S800H ENC CBAC 100°	S800H ENC SBW 100°	S800H ENC CBAC 180°	S800H ENC SBW 180°
Power supply voltage	220-240V~ 50/60 Hz			
Electric motor	With brushes 24V 			
Max. power	60 W			
Max. angular speed	5.5°/s (with) - 8.2°/s (with E124)			
Max. leaf weight	800 Kg			
Operating ambient temperature	-20°C ÷ +55°C			
Protection class	IP67			
Weight	14 Kg		15 Kg	
Use frequency	Continuous use			
Max. leaf width	2 m	4 m	2 m	4 m
Type of oil	FAAC HP OIL			
Dimensions (LxDxH)	Operator 380 x 220 x 160 - foundation box 507 x 283 x 200 mm		operator 450 x 220 x 160 - foundation box 507 x 283 x 200 mm	
Electronic equipment	Not included			

FAMILY MODELS

Model	Item code
S800H ENC CBAC 100°	108720
S800H ENC SBW 100°	108724
S800H ENC CBAC 180°	108722
S800H ENC SBW 180°	108725

PACKS

S800H ENC includes: a hydraulic operator with hydraulic lock in opening/ closing (**CBAC**), without lock (**SBW**) an absolute magnetic encoder, a release and adjusting key.

The foundation box includes: a foundation box in cataphoresis treated aluminium with anti-rotation pin, a cover in polished stainless steel.

Typical Installation Examples page. 291

ELECTRONIC CONTROL UNITS



E124S Electronic control unit with enclosure
Info at page 141

790305

ACCESSORIES



Emergency battery support kit
(specific for E124S)

390926



Foundation box

490112



Stainless steel foundation box

490113

>>



Release lock with customised key

71209101-10



Hydraulic release device (to be used with the code 390972) for operators CBAC or SBW

390035



Splined joint group kit for CBAC or SBW operators




390972



S800 welded shoe kit (welding according to UNI EN ISO 15614-1)

490187

INSTALLATION DIMENSIONS (MM)

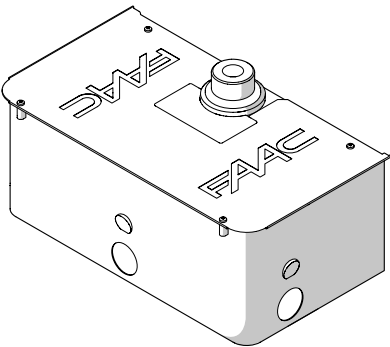

NOTE

◆ The 2 standard Pb batteries are not supplied by FAAC and must have voltage/current 12V/4Ah. Dimensions: 90X70X108 mm

Compatibility: compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



S800 ENC

230V Underground hydraulic operator



Max width single leaf

2 - 4 m

Max weight

800 Kg

Use frequency (cycles/hour)

45 - 30

- Underground operator with hydraulic technology 230V.
- Absolute magnetic encoder (for ENC models) with integrated BUS 2easy (non polarized two wires connection).
- Integrated Positive Stops, possibility to avoid mechanical stops installation. **FAAC Patent.**



230V **SAFEzone** system:
S800 ENC + E045S or E145S



GREENtech 230V system:
S800 ENC + E045S or E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	S800 ENC CBAC 100°	S800 ENC SBW 100°	S800 ENC CBAC 180°	S800 ENC SBW 180°
Power supply voltage	220-240V~ 50/60 Hz			
Electric motor	Asynchronous single phase			
Max. power	220 W			
Max. angular speed	7.8°/s			
Max. leaf weight	800 Kg			
Operating ambient temperature	-20°C ÷ +55°C			
Protection class	IP67			
Weight	16 Kg		16,5 Kg	
Use frequency	45 cycles/hour		30 cycles/hour	
Max. leaf width	2 m	4 m	2 m	4 m
Type of oil	FAAC HP OIL			
Dimensions (LxDxH)	Operator 380 x 220 x 160 - foundation box 507 x 283 x 200 mm		operator 450 x 220 x 160 - foundation box 507 x 283 x 200 mm	
Electronic equipment	Not included			

FAMILY MODELS

Model	Item code
S800 ENC CBAC 100°	108800
S800 ENC SBW 100°	108802
S800 ENC CBAC 180°	108801
S800 ENC SBW 180°	108803

PACKS

S800 ENC includes: a hydraulic operator with hydraulic lock in opening/ closing (**CBAC**), without lock (**SBW**) an absolute magnetic encoder, a release and adjusting key.

The foundation box includes: a foundation box in cataphoresis treated aluminium with anti-rotation pin, a cover in polished stainless steel.

Typical Installation Examples page. 292

ELECTRONIC CONTROL UNITS



E045S control unit
Info at page 132

790077



E145S control unit
Info at page 134

790076

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for electronic control units

720118



Enclosure mod. E for electronic control units

720119



Enclosure mod. LM for electronic control units

720309

>>



BUS XIB interface (for E045 or E045S or E034 boards with photocell no BUS)

790062



Foundation box

490112



Stainless steel foundation box

490113



Hydraulic release device (to be used with the code 390972) for operators CBAC or SBW

390035



Splined joint group kit for CBAC or SBW operators

390972



Release lock with customised key

71209101-10



>>

INSTALLATION DIMENSIONS (MM)



S800 welded shoe kit (welding according to UNI EN ISO 15614-1)

490187

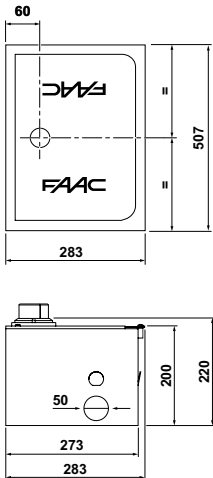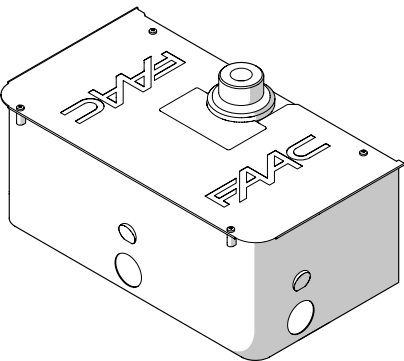

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200

Swing leaf operator
with integrated motor

S2500I

24V Electromechanical operator




Max width single leaf

2 - 2,5 m (with electric lock)

Max. leaf weight

250 kg

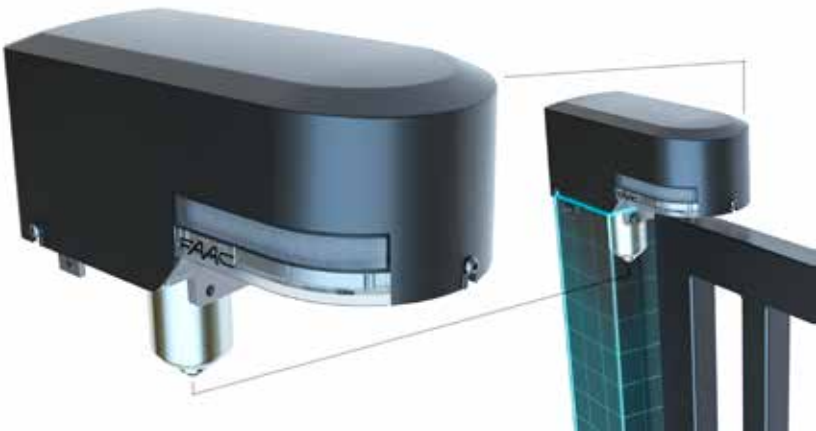

- Exclusive modern design adaptable to any architectural setting
- Integrated flashing light easily visible from both inside and outside the property
- Integrated adjustable mechanical stops enable both the opening and closing stop positions to be set (optional)



24V SAFEzone
system:
S2500I + E124S



24V GREENtech
system:
S2500I + E124S



Watch the video
vimeo.com/faacgroup/S2500I-en

DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	S2500I 24V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	With brushes 24V 
Max. power	40W
Max. torque	320Nm
Max. angular speed	10°/s
Max. leaf weight	250 Kg
Max. leaf opening angle	165°
Operating ambient temperature	-20°C ÷ + 55°C
Protection class	IP X4
Weight	7,9 Kg (operator) - 3,3 Kg (hinge) - 1,8 Kg (cover)
Dimensions (LxDxH)	340 x 160 x 150 mm
Electronic equipment	not included
Mechanical stops integrated in opening and closing	optional
Continuous use time (ROT)	Continuous at 55°C
Encoder	BUS magnetic absolute
Max. leaf width	2 m (2,5m with electric lock)
Square section pillar dimensions	100x100, 120x120, 150x150 mm

FAMILY MODELS

Model	Item code
S2500I 24V	104250

PACKS

S2500I includes: an electromechanical actuator, actuator-hinge fastenings, a pack of grease and a release key.
Hinge S2500I includes: an upper hinge consisting of a plate, gear, pillar fastenings, joint and bushing for connection to the leaf, 2 integrated flashing LED lights and release lock.

Typical Installation Examples page. 292

ELECTRONIC CONTROL UNITS



E034 control unit with enclosure
Info at page 140

102011



E124S Electronic control unit with enclosure
Info at page 141

790305



Low consumption kit XLC
Compatible with E034 control unit

390130



Emergency battery support kit
(specific for E124S)

390926



Cover S2500I RAL Neutral

416251



Hinge S2500I

490250

>>



Cover S2500I RAL 7021

416250



XK30 Key selector with lever release

391456



External release with customized keys from no. 1 to no. 10

424550001-10



External release kit for S2500I

390091



Integrated mechanical stops S2500I

490252

>>

INSTALLATION DIMENSIONS (MM)



Guide bracket kit S2500I

490253





Column adapter 100mm S2500I

490254




Column adapter 120mm S2500I

490255

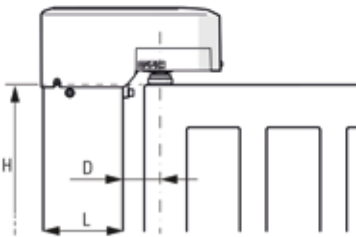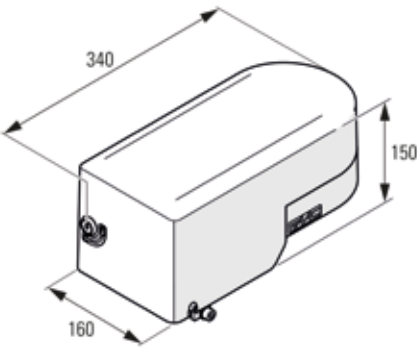

H max (mm)	L (mm)	D (mm)
2500	100	50 ... 90
	120	
	150	

anta (cm)	(kg)
0 ... 150	250
175	210
200	185
225	165
250	150

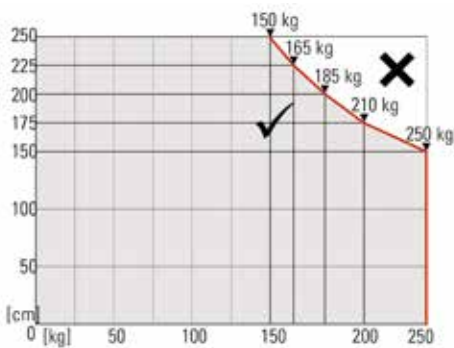

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



AUTOMATION FOR SLIDING GATES



AUTOMATION FOR SLIDING GATES

AUTOMATION FOR SLIDING GATES

Type of installation

Max. leaf weight (kg)			
400	C4000I - C720		
500	740 E - 740 C		
600	746 C	746 C	
800	C721	C721	
900	741 E - 741 C		
1000		844 R Reversible	844 R Reversible
1800		844 C	844 C - C851
2200			844 3PH
3500			884 MC 3PH

Typical Installation Examples page. 294

C4000I

Concealed gearmotor 24V



Max. leaf weight

400 Kg

Max speed

16 m/min

Type of use

Residential

- Compact dimensions, perfectly integrable in the architectural context
- Electronic control unit and absolute electronic encoder (patented), having functions of reverse on obstacle and recognition of limit switches
- Manual unlocking accessible from inside and outside the property



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	C4000I
Power supply voltage	220-240V ~ 50/60 Hz
Electric motor	24 V
Max. power	150 W
Max expressed force	125 N
Pinion	Z16 module 4
Max. leaf width	8 m
Max. leaf weight	400 kg
Max cantilever leaf weight	250 kg
Leaf speed	16 m/min
Operating ambient temperature	-20 °C +55 °C
Type of use	Residential
Continuous use time (ROT)	Continuous
Protection class	IP30
Dimensions (LxDxH)	110 x 180 x 250 mm
Weight	3,5 kg
Column dimensions	110x110 mm minimum internal dimension

FAMILY MODELS

Model	Item code
C4000I	109001

PACKS

C4000I includes: an electromechanical actuator in low voltage with electronic equipment E4000I, pinion gear for rack, a release key and fastening accessories.

Typical Installation Examples page. 293

ELECTRONIC CONTROL UNITS



E4000I incorporated electronic control unit
Info at page 157

63003390

ACCESSORIES



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123

>>



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦

490333





Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333

390178

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)



OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



740 E

230V Gearmotor



Max. leaf weight

500 Kg

Max speed

12 m/min.

Use frequency (cycles/hour)

22



- Redesigned Look, Timeless Elegance: The new design represents the natural evolution of an iconic FAAC product.
- Easy programming thanks to the display and to the prewired control unit
- Magnetic limit switch.
- Integrated encoder with reverse function upon obstacle detection and specific management in opening and slow down.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	740 E Z16 with encoder
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	460 W
Max. torque	18 Nm (*)
Max expressed force	450 N (*)
Reduction ratio	1:25
Max. leaf width	15 m
Leaf speed	12 m/min
Speed adjustment and motor control	No
Limit switch	Magnetic
Pinion	Z16 module 4
Encoder	Optical encoder
Force adjustment	Via electronic control board
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	140°C self-restoring
Protection class	IP44
Weight	11,9 Kg
Dimensions (LxDxH)	295 x 181 x 320 mm
Max. leaf weight	500 Kg
Use frequency	22 cycles/h
Electronic equipment	740D incorporated

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
740 E Z16 with encoder	1097805

PACKS

740 E includes: an electromechanical gearmotor with 740D control unit, encoder for anti-crushing safety device, pinion for rack, two release keys, foundation plate, limit switch magnets.

Typical Installation Examples page. 294

ELECTRONIC CONTROL UNITS



740D (incorporated in automation)
Info at page 142

202269

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123

>>



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦

490333




Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333

390178

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)

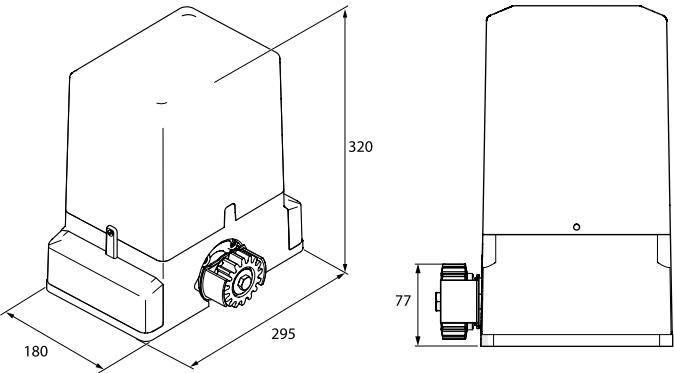

For any other configuration please refer to the technical manual

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



740 C

230V Gearmotor

NEW

Max. leaf weight

500 Kg

Max speed

12 m/min.

Use frequency (cycles/hour)

56



- **Advanced Gearmotor:** Built-in control unit with adjustable speed, safety edge inputs, FDS and Omnidec radio protocol, Bus2Easy technology.
- **Integrated Low Consumption Functionality in Standby Mode:** The control unit is designed with low power standby (LC) functionality, in compliance with the Ecodesign Directive 2009/125/EC and EU Regulation 2023/826. The low-power mode can be easily enabled or disabled via the board's menu. If enabled, it activates automatically after a few minutes of inactivity, reducing standby power consumption (<0.5W, or 2W if connected to Simply Connect). This ensures energy efficiency, reduced operating costs and a positive environmental impact.
- **High-Performance Motor Control:** Features high-resolution encoder for smooth operation, force optimization, reduced consumption, and adjustable obstacle detection sensitivity.
- **Modern Aesthetics:** Timeless design with clean, distinctive lines, adaptable to any context.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	740 C with encoder
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	430 W
Max. torque	18 Nm (*)
Max expressed force	450 N (*)
Reduction ratio	1:25
Max. leaf width	15 m
Leaf speed	12 m/min
Speed adjustment and motor control	Yes
Limit switch	Magnetic
Pinion	Z16 module 4
Encoder	Magnetic encoder
Force adjustment	Via electronic control board
Operating ambient temperature	-20°C ÷ +55°C (**)
Thermal protection	140°C self-restoring
Protection class	IP44
Weight	11,9 Kg
Dimensions (LxDxH)	295 x 181 x 320 mm
Max. leaf weight	500 Kg
Use frequency	56 cycles/h
Electronic equipment	Built-in
Release device	Rotating release knob - coded key
Thrust capacitor	10 µF

(*) data referred to 230V~ 50Hz.

(**) 230V version can operate at temperatures from +55° to +65° under the following conditions: Frequency of use 22 cycles/h. Maximum load on accessories (including Bus2Easy accessories) 400 mA (instead of 500 mA). Cycles/hour refer to a gate of maximum weight and 5 m width.

FAMILY MODELS


Model	Item code
740 C with encoder	109600

PACKS

740 C includes: an electromechanical gearmotor with low-consumption electronic control unit, encoder for anti-crushing safety, rack pinion, two release keys, foundation plate, limit switch magnets.

Typical Installation Examples page. 293

ELECTRONIC CONTROL UNITS



E781S LC Electronic control unit
Info at page 145

63003530

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123

>>



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦

490333




Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333

390178

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)

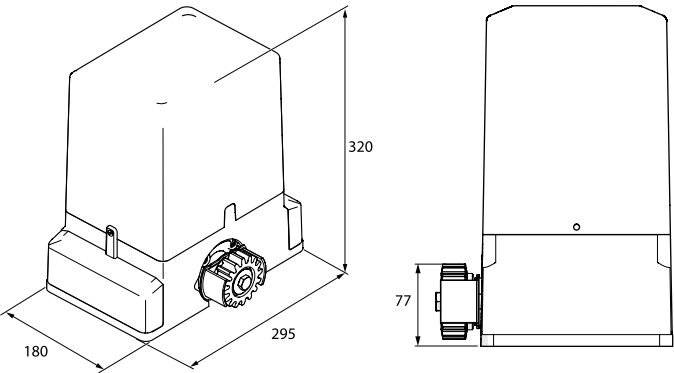

For any other configuration please refer to the technical manual

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



741 E

230V Gearmotor



Max. leaf weight

900 Kg

Max speed

12 m/min.

Use frequency (cycles/hour)

30

- Redesigned Look, Timeless Elegance: The new design represents the natural evolution of an iconic FAAC product.
- Easy programming thanks to the display and to the prewired control unit
- Magnetic limit switch.
- Integrated encoder with reverse function upon obstacle detection and specific management in opening and slow down



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	741 E Z16 with encoder
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	600 W
Max. torque	24 Nm (*)
Max expressed force	680 N (*)
Reduction ratio	1:25
Max. leaf width	15 m
Leaf speed	12 m/min
Speed adjustment and motor control	No
Limit switch	Magnetic
Pinion	Z16 module 4
Encoder	Optical encoder
Force adjustment	Via electronic control board
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	140°C self-restoring
Protection class	IP44
Weight	13,1 Kg
Dimensions (LxDxH)	295 x 181 x 320 mm
Max. leaf weight	900 Kg
Use frequency	30 cycles/h
Electronic equipment	740D incorporated
Release device	Rotating release knob - coded key
Thrust capacitor	12,5 µF

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
741 E Z16 with encoder	1097815

PACKS

741 E includes: an electromechanical gearmotor with 740D control unit, encoder for anti-crushing safety device, pinion for rack, two release keys, foundation plate, limit switch magnets.

Typical Installation Examples page. 294

ELECTRONIC CONTROL UNITS



740D (incorporated in automation)
Info at page 142

202269

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123

>>



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦

490333




Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333

390178

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)

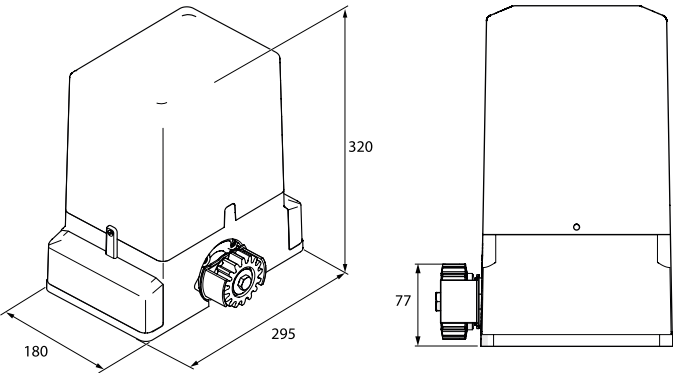

For any other configuration please refer to the technical manual

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



741 C

230V Gearmotor



NEW

Max. leaf weight

900 Kg

Max speed

12 m/min.

Use frequency (cycles/hour)

56

- Advanced Gearmotor: Built-in control unit with adjustable speed, safety edge inputs, FDS and Omnidec radio protocol, Bus2Easy technology.
- **Integrated Low Consumption Functionality in Standby Mode:** The control unit is designed with low power standby (LC) functionality, in compliance with the Ecodesign Directive 2009/125/EC and EU Regulation 2023/826. The low-power mode can be easily enabled or disabled via the board's menu. If enabled, it activates automatically after a few minutes of inactivity, reducing standby power consumption (<0.5W, or 2W if connected to Simply Connect). This ensures energy efficiency, reduced operating costs and a positive environmental impact.
- High-Performance Motor Control: Features high-resolution encoder for smooth operation, force optimization, reduced consumption, and adjustable obstacle detection sensitivity.
- Modern Aesthetics: Timeless design with clean, distinctive lines, adaptable to any context.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	741 C with encoder
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	530 W
Max. torque	18 Nm (*)
Max expressed force	680 N (*)
Reduction ratio	1:25
Max. leaf width	15 m
Leaf speed	12 m/min
Speed adjustment and motor control	Yes
Limit switch	Magnetic
Pinion	Z16 module 4
Encoder	Magnetic encoder
Force adjustment	Via electronic control board
Operating ambient temperature	-20°C ÷ +55°C (**)
Thermal protection	140°C self-restoring
Protection class	IP44
Weight	13,1 Kg
Dimensions (LxDxH)	295 x 181 x 320 mm
Max. leaf weight	900 Kg
Use frequency	56 cycles/h
Electronic equipment	Built-in
Release device	Rotating release knob - coded key
Thrust capacitor	12.5 µF

(*) data referred to 230V~ 50Hz.(**) 230V version can operate at temperatures from +55° to +65° under the following conditions: Frequency of use 30 cycles/h. Maximum load on accessories (including Bus2Easy accessories) 400 mA (instead of 500 mA). Cycles/hour refer to a gate of maximum weight and 5 m width.

FAMILY MODELS


Model	Item code
741 C with encoder	109602

PACKS

741 C includes: an electromechanical gearmotor with low-consumption electronic control unit, encoder for anti-crushing safety, rack pinion, two release keys, foundation plate, limit switch magnets.

Typical Installation Examples page. 295

ELECTRONIC CONTROL UNITS



E781S LC Electronic control unit
Info at page 145

63003530

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123

>>



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦

490333




Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333

390178

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)

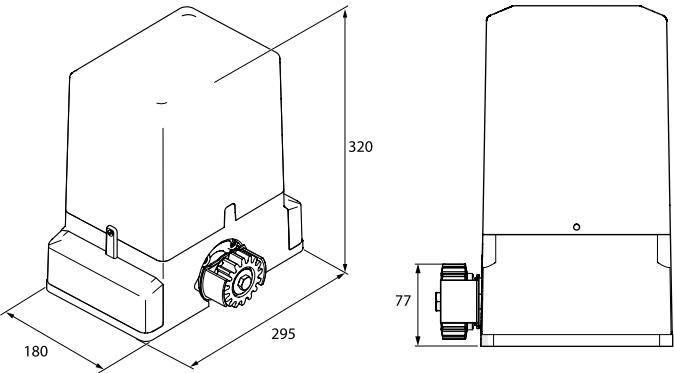

For any other configuration please refer to the technical manual

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200

C720

Low voltage 24V gearmotor



Max. leaf weight

400 Kg

Max speed

18 m/min.

Use frequency

Continuous use

- New patented FAAC reduction principle: very high output (> 80%) and energy efficiency.
- Magnetic limit switch.
- Electronic control unit with anti-crushing device and electronic encoder with reverse function upon detection of obstacle.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	C720 24V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Brush motor 24V ---
Max. power	170 W
Max. torque	18 Nm
Max expressed force	320 N
Reduction ratio	1:49
Max. leaf width	15 m
Leaf speed	18 m/min (adjustable)
Speed adjustment and motor control	Yes - electronic adjustment
Limit switch	Magnetic
Pinion	Z28 module 4
Encoder	Electronic encoder
Force adjustment	Via electronic control board
Operating ambient temperature	-20°C ÷ +55°C
Protection class	IP44
Weight	8 Kg
Dimensions (LxDxH)	304 x 180 x 282 mm
Max. leaf weight	400 Kg
Use frequency	100 %
Electronic equipment	Incorporated E721

FAMILY MODELS

Model	Item code
C720 24V	109320

PACKS

C720 includes: a low voltage electromechanical operator with E721 electronic control unit, pinion for rack, release key, foundation plate.

Typical Installation Examples page. 295

ELECTRONIC CONTROL UNITS



E721 electronic control unit (incorporated in automation)
Info at page 143
63002485

ACCESSORIES



XBAT 24 emergency battery kit ♦
390923



Release lock with customised key
712501001-10



Customised release lock kit (10 pcs. pack)
424002

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
490123



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)
490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)
490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦
490333

>>





Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333
390178

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)



For any other configuration please refer to the technical manual

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200
-------------------	----------------------------------	--------------------------	--	------------------------------------	-----------------------------	---------------------------------

C721

Low voltage 24V gearmotor



Max. leaf weight

800 Kg

Max speed

18 m/min.

Use frequency

Continuous use

- New mobile-axis reduction principle: exceptionally high mechanical performance (>80%) and energy saving. **FAAC Patent**.
- Magnetic limit switch.
- Electronic control unit with anti-crushing device and electronic encoder with reverse function upon detection of obstacle.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	C721 24V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Brush motor 24V ---
Max. power	290 W
Max. torque	30 Nm
Max expressed force	530 N
Reduction ratio	1:49
Max. leaf width	15 m
Leaf speed	18 m/min (adjustable)
Speed adjustment and motor control	Yes - electronic adjustment
Limit switch	Magnetic
Pinion	Z28 module 4
Encoder	Electronic encoder
Force adjustment	Via electronic control board
Operating ambient temperature	-20°C ÷ +55°C
Protection class	IP44
Weight	8 Kg
Dimensions (LxDxH)	304 x 180 x 282 mm
Max. leaf weight	800 Kg
Use frequency	100 %
Electronic equipment	Incorporated E721

FAMILY MODELS

Model	Item code
C721 24V	109321

PACKS

C721 includes: a low voltage electromechanical operator with E721 electronic control unit, pinion for rack, release key, foundation plate. The C721 includes the release lock with customisable key.

Typical Installation Examples page. 296

ELECTRONIC CONTROL UNITS



E721 electronic control unit (incorporated in automation)
Info at page 143
63002485

ACCESSORIES



XBAT 24 emergency battery kit ♦
390923



Release lock with customised key
712501001-10

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
490123



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)
490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)
490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦
490333

>>





Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333
390178

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)



For any other configuration please refer to the technical manual

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200
-------------------	----------------------------------	--------------------------	--	------------------------------------	-----------------------------	---------------------------------

746 C

230V Gearmotor



NEW

Max. leaf weight

400 - 600 Kg

Max speed

9,6 - 12 m/min.

Use frequency

Continuous use



- Renewed gearmotor with integrated E781S LC electronic control unit featuring adjustable speed control levels. Includes two dedicated inputs for safety edges (NC or 8.2 KOhm) and Bus2Easy technology
- New high-performance retroactive feedback motor control with high-resolution encoder: smoother acceleration and deceleration ramp, force optimization, reduced consumption, adjustable sensitivity to obstacle detection.
- Compatible with the Simply Connect platform and with the new FDS radio technology.
- Integrated Low Consumption Functionality in Standby Mode: The control unit is designed with low power standby (LC) functionality, in compliance with the Ecodesign Directive 2009/125/EC and EU Regulation 2023/826. The low-power mode can be easily enabled or disabled via the board's menu. If enabled, it activates automatically after a few minutes of inactivity, reducing standby power consumption (<0.5W, or 2W if connected to Simply Connect). This ensures energy efficiency, reduced operating costs and a positive environmental impact.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	746 C Z16	746 C Z20
Power supply voltage	220-240V~ 50/60 Hz	
Max. power	350 W	
Pinion	Z16 module 4	Z20 module 4
Max expressed force	830 N	665 N
Max. leaf weight	600 Kg	400 Kg
Max. leaf speed	9.6 m/min	12 m/min
Max. leaf length	40 m	50 m
Stopping space	30 mm	
Protection class	IP44	
Thrust capacitor	12.5 µF	
Operating ambient temperature	-20° ÷ +55°C *	
Thermal protection	120°C automatic rearming	
Weight	16.2 Kg	16.5 Kg

(*) In the 230V version, it can operate at temperatures from +55° to +65° under the following conditions: Frequency of use 28 cycles/hour (746 C Z16) - 36 cycles/hour (746 C Z20), Maximum load on accessories (including Bus2Easy accessories) 400 mA (instead of 500 mA). The cycles/hour refer to a gate with maximum weight and 5 m width.

FAMILY MODELS

Model	Item code
746 C Z16	109745
746 C Z20	109746

PACKS

746 C packages include: a gearmotor with pinion and E781 control unit, limit switch magnets, release key, covering carter.

Typical Installation Examples page. 296

ELECTRONIC CONTROL UNITS



E781S LC Control Unit
Info at page 145

63003530

ACCESSORIES



Foundation plate with lateral and height adjustments

737816



Lock with custom key (1-10)

71275101-10



Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333 390178

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125



30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each) ♦

490333

PINIONS



Pinion Z20 for rack



Pinion Z16 for rack


719167

719130

NOTE

♦ Max gate weight: 400kg.

INSTALLATION DIMENSIONS (MM)

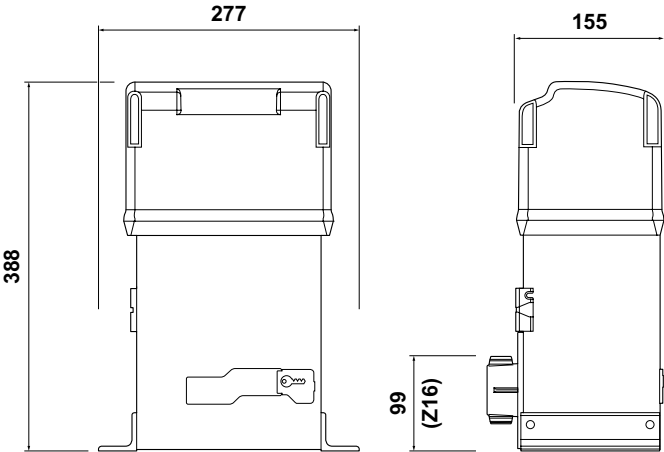

For any other configuration please refer to the technical manual

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200

844 C

230V Gearmotor



NEW

Max. leaf weight

1.800 Kg

Max speed

9,5 - 12 m/min.

Use frequency

Continuous use



- Renewed gearmotor with integrated E781S LC electronic control unit featuring adjustable speed control levels. Includes two dedicated inputs for safety edges (NC or 8.2 KOhm) and Bus2Easy technology.
- New retroactive motor control with high-resolution encoder, 844 C offers smoother acceleration and deceleration ramps, optimised force reduction and adjustable obstacle detection sensitivity.
- Compatible with the Simply Connect platform and with the new FDS radio technology.
- Integrated Low Consumption Functionality in Standby Mode: The control unit is designed with low power standby (LC) functionality, in compliance with the Ecodesign Directive 2009/125/EC and EU Regulation 2023/826. The low-power mode can be easily enabled or disabled via the board's menu. If enabled, it activates automatically after a few minutes of inactivity, reducing standby power consumption (<0.5W, or 2W if connected to Simply Connect). This ensures energy efficiency, reduced operating costs and a positive environmental impact.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	844 C Z16
Power supply voltage	220-240V~ 50/60 Hz
Max. power	680 W
Pinion	Z16 module 4
Max expressed force	1300 N
Max. leaf weight	1800 Kg.
Max. leaf speed	9.6 m/min
Max. leaf length	40 m
Stopping space	30 mm
Protection class	IP44
Thrust capacitor	18 µF
Operating ambient temperature	-20° ÷ +55°C *
Thermal protection	120°C automatic rearming
Weight	16.9 Kg

(*) The 230V version can operate at temperatures from +55° to +65° under the following conditions: Frequency of use 28 cycles/hour, Maximum load on accessories (including Bus2Easy accessories) 400 mA (instead of 500 mA). Cycles/hour refer to a door of maximum weight and 5 m width.

FAMILY MODELS

Model	Item code
844 C Z16	109925
844	109926

PACKS

844 C Z16 , designed for on-rack applications, includes: a gearmotor with pinion and E781 control unit, limit switch magnets, release key, screw cover.

Typical Installation Examples page. 297

ELECTRONIC CONTROL UNITS



E781S LC Control Unit
Info at page 145

63003530

ACCESSORIES



Foundation plate with lateral and height adjustments

737816



Lock with custom key (1-10)

71275101-10



Kit of 4 fastening screws to be screwed in (package of 4 kits) to be combined with 1 m of 490333
390178

RACKS



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490122



Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)

490123



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)


490124



Galvanised rack 30x8 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)

490125

INSTALLATION DIMENSIONS (MM)

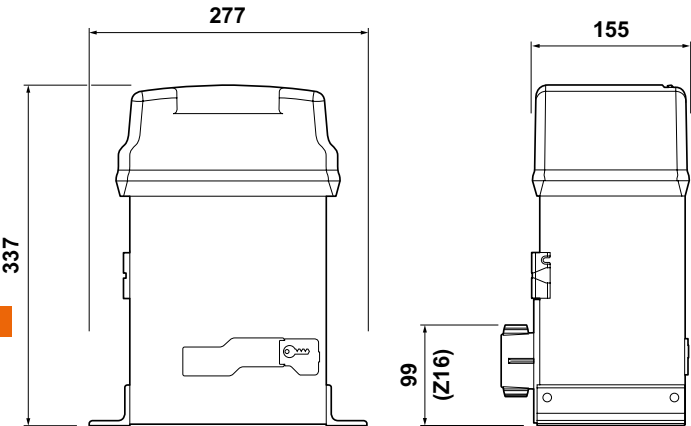

For any other configuration please refer to the technical manual

PINIONS



Pinion Z20 for rack



Pinion Z16 for rack

719167 719130

NOTE

♦ Max gate weight: 400kg.

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

844 3PH

400V Gearmotor



Max. leaf weight

1,600 - 2,200 Kg

Use frequency

Continuous use

- New integrated E844 3PH electronic board with deceleration and encoder control (in model 844 C 3PH)
- Maximum anti-crushing safety
- Inductive limit switch.
- Designed for height and side adjustable fastening.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	844 3PH	844 3PH 220V	844 C 3PH
Power supply voltage	380-415V~ 3PH 50/60 Hz	220-240V~ 3PH 50/60 Hz	380-415V~ 3PH 50/60 Hz
Electric motor	Asynchronous three phase		
Max. power	950 W		
Max. torque	62 Nm (*)	45 Nm (*)	62 Nm (*)
Max expressed force	2500 N (Z12) - 1900 N (Z16) - 1500 N (Z20) (*)		
Reduction ratio	1:30		
Max. leaf width	40 m (Z16) - 50 m (Z20)	30 m (Z12) - 40 m (Z16) - 50 m (Z20)	
Leaf speed	7.2 m/min (Z16) - 9.6 m/min (Z12) - 12.0 m/min (Z20)		7 m/min (Z16) - 9.6 m/min (Z12) - 12.0 m/min (Z20)
Speed adjustment and motor control	No		
Limit switch	Inductive with metal sheet		
Pinion	No		
Encoder	No		
Operating ambient temperature	-20°C ÷ +55°C		
Thermal protection	150°C self-healing		
Protection class	IP44		
Weight	16 Kg		
Type of oil	FAAC HP OIL		
Dimensions (LxDxH)	575 x 191 x 388mm		
Max. leaf weight	2,200 Kg (Z12) - 1,600 Kg (Z16)		2.200 Kg (Z12) - 1.600 Kg (Z16) - 1.000 Kg (Z20)
Use frequency	Continuous use		
Electronic equipment	-		Built-in

The E844 3PH electronic control unit, supplied inside the 844 C 3PH gear motor, is compatible with E-L-LM enclosures and can be remote-controlled if necessary.

FAMILY MODELS

Model	Item code
8443PH	109904
8443PH 220V	109905
844C 3PH	109928

PACKS

844 3PH includes: a gearmotor designed for rack application without pinion, limit switch plates for mechanical assembly, release key, screw cover.
844 C 3PH includes: gearmotor designed for rack assembly without pinion and with electronic board E844 3PH, mechanical assembly limit switch plates, release key, protective covers.

Typical Installation Examples page. 297

ELECTRONIC CONTROL UNITS



E844 3PH Control Unit
(built-in only in model
844 C 3PH)*
Info at page 147
202073

ACCESSORIES



Foundation plate with
lateral and height
adjustments
737816



Lock with custom key
(1-10)
71275101-10

RACKS



Galvanised rack 30x12 mod. 4
including weld-on fittings (4 pcs
pack, 1 m each)
490122



Galvanised rack 30x12 mod. 4
including mechanical fittings (4 pcs
pack, 1 m each)
490124

PINIONS



Pinion Z20 for rack
719167




Pinion Z16 for rack
719130



Pinion Z12 for rack (max
gate weight 2200 Kg) for
844 R 3PH
7191661

INSTALLATION DIMENSIONS (MM)

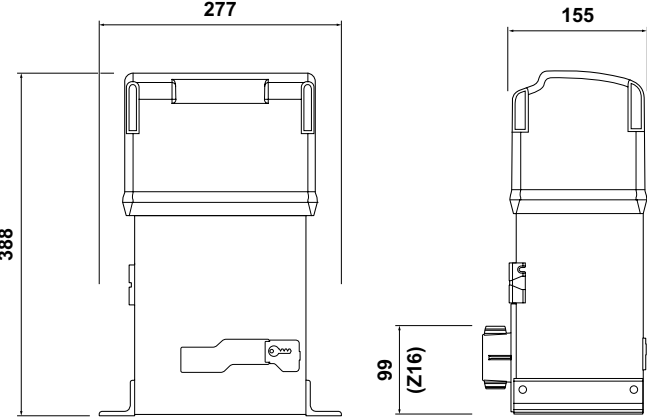

For any other configuration please refer to the technical manual

NOTE

♦ Max gate weight: 400kg.

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200
----------------------	-------------------------------------	--------------------------	---	---------------------------------------	-----------------------------	------------------------------------



844 R Reversible

230V Gearmotor



Max. leaf weight

1,000 Kg

Use frequency

70%

- Reversible: when no power is supplied to the motor, the sliding leaf can always be moved manually.
- An electric lock is needed to grant hold in closing
- Inductive limit switch
- Key protected lever release device.



GREENtech 230V
system:
844 E R + E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	844 R Reversible
Power supply voltage	220-240V~ 50/60 Hz
Max. power	550 W
Traction and thrust force	0÷68 daN (Z12)
Motor rotation speed	750 cycles/min
Reduction ratio	1:10
Operating ambient temperature	-20°C ÷ +55°C
Weight	14.5 Kg
Protection class	IP 44
Type of oil	FAAC HP OIL
Max speed	11,6 m/min (Z12)
Thermal protection	140°C
Limit switch	Magnetic
Twin-disk	Twin-disk in oil-bath
Type of treatment	Cataphoresis
Dimensions (LxDxH)	277 x 155 x 388 mm
Max. leaf weight	1.000 kg
Use frequency	70%
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
844 R Z12 Rev. PHASE OUT	109897
844 Z12 Rev.	109927

PACKS

844 R Reversible includes: a gearmotor designed for on-rack application with pinion, limit switch magnets for mechanical assembly, release key, covering carters.

Typical Installation Examples page. 298

ELECTRONIC CONTROL UNITS



578D electronic control unit (remote installation)
Info at page 146
790922



E145S control unit
Info at page 134
790076

E145S control unit is available while supplies last and will soon be replaced by model E145S LC.

ACCESSORIES



Enclosure mod. L for electronic control units
720118



Enclosure mod. E for electronic control units
720119



Enclosure mod. LM for electronic control units
720309

>>

RACKS



Foundation plate with lateral and height adjustments
737816



Lock with custom key (1-10)
71275101-10



Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
490122




Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)
490123



Galvanised rack 30x12 mod. 4 including mechanical fittings (4 pcs pack, 1 m each)
490124

>>

INSTALLATION DIMENSIONS (MM)

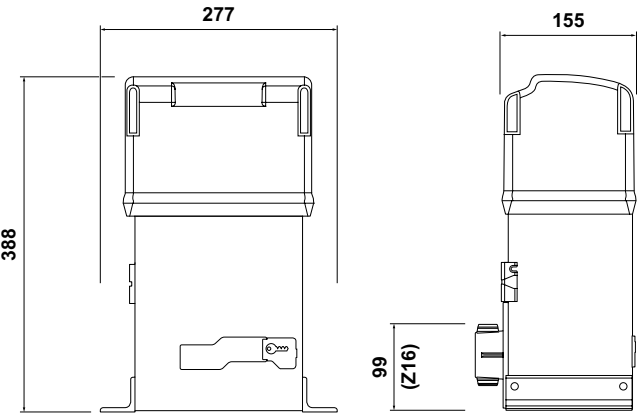

For any other configuration please refer to the technical manual

NOTE

For gate hold in closing you need to install an electric lock.
♦ Max gate weight: 400kg.

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200



884 MC 3PH

400V Gearmotor



Max. leaf weight

3,500 Kg

Use frequency

50 - 100%

- New built-in E844 3PH control unit with programming via display and buttons
- Twin-disk clutch in oil-bath
- Breaking device: reduced stop spaces and keeps the gate closed.
- Steel housing protected by cataphoresis treatment and polyester paint.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	884 MC 3PH
Power supply voltage	220-240V / 380-415V~ 3PH 50/60 Hz
Electric motor	Asynchronous three phase
Max. power	850 W
Max. torque	0 ÷ 155 Nm (*)
Max expressed force	3.200 N (*)
Reduction ratio	1:43,2
Max. leaf width	42 m
Speed adjustment and motor control	No
Limit switch	Roller lever micro switch
Pinion	No
Encoder	No
Force adjustment	Twin-disk clutch in oil-bath
Operating ambient temperature	-20°C ÷ +65°C
Thermal protection	155°C
Protection class	IP55
Weight	50 Kg
Type of oil	FAAC HP OIL
Dimensions (LxDxH)	430 x 310 x 586 mm
Max. leaf weight	3,500 Kg
Use frequency	100% (up to 2,000 Kg) - 50% (over 2,000 Kg)
Electronic equipment	E844 3PH incorporated

(*) data referred to 230/400V ~ 50Hz.

FAMILY MODELS

Model	Item code
884 MC 3PH	109885

PACKS

884 MC 3PH includes: a gearmotor designed for rack assembly without pinion and with E844 3PH electronic board, limit switch plates, release key.

Typical Installation Examples page.298

ELECTRONIC CONTROL UNITS



E844 3PH Control Unit
(built-in only in model
844 C 3PH)
Info at page 147
202073

ACCESSORIES



Foundation plate
737628

RACKS



Galvanised rack 30x30
module 6
(length 1 m)
719328




Angle fixing bracket
pack
rack (3 pc)
722123

PINIONS



Pinion Z16 module 6
with protection for
rack
719169

INSTALLATION DIMENSIONS (MM)

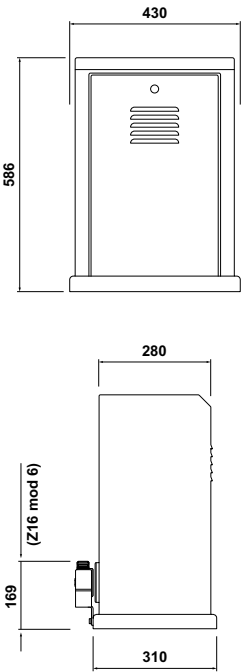

For any other configuration please refer to the technical manual

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200
--------------------------	---	---------------------------------	---	---	------------------------------------	--



C851

230V Gearmotor



Max. leaf weight

1.800 Kg

Max speed

40 m/min

Use frequency

100%

- Ideal for special applications where fast operation is required and a continuous service (100%).
- Irreversibility guaranteed by integrated electric brake on the powerful geared motor 1.1KW.
- Speed programming via integrated frequency inverter **on the E850S control board.**



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	C851
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	1 KW three phase with four poles
Type of gearmotor	Worm screw with oil lubrication
Max. power	1,800 W
Max. torque	168 Nm (*)
Max expressed force	3.000 N (*)
Max. leaf width	20 m
Leaf speed	20 ÷ 40 m/min (adjustable)
Speed adjustment and motor control	On control board
Limit switch	integrated mechanics + magnetic
Pinion	Z28 module 4
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	75°C
Protection class	IP54
Weight	40 Kg
Dimensions (LxDxH)	510 x 295 x 467 mm
Max. leaf weight	1.800 Kg
Use frequency	100% (T=25 °C)
Electronic equipment	E850S incorporated

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
C851	109903

PACKS

C851 includes: a gearmotor designed for rack assembly with pinion Z28, with E850S electronic device equipped with on-board inverter and built-in magnetic and mechanical limit switches.

Typical Installation Examples page. 299

ELECTRONIC CONTROL UNITS



Built-in E850S control board
Info at page 148

63003207

ACCESSORIES



C851 Foundation plate

737850


RACKS



Galvanised rack 30x12 mod. 4
including weld-on fittings (4 pcs
pack, 1 m each)

490122

INSTALLATION DIMENSIONS (MM)

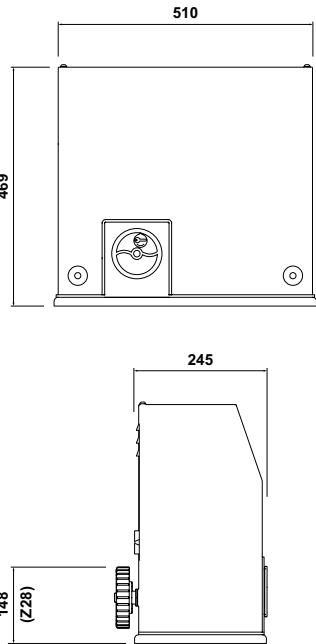

For any other configuration please refer to the technical manual

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



AUTOMATIONS FOR SECTIONAL DOORS



AUTOMATIONS FOR SECTIONAL DOORS



AUTOMATIONS FOR SECTIONAL DOORS

Type of installation

Door max dimensions L x H (m)		
3,00 x 3,80 UP AND OVER springs/counterweights (with GDA 2400 adapter)	D600 D700 HS	D1000
5.00 x 3.80 SECTIONAL	D600 D700 HS	D1000
	Electromechanical ceiling operator	

Typical Installation Examples page. 299

Types of up and over/sectional doors with potential for automate function, with: D600 - D700 HS - D1000





D600

24V Electromechanical operator with belt or chain drive



Maximum traction/thrust force

600 N

Use frequency

Continuous use

- Easy and fast installation thanks to the pre assembled rail and rotation coupling.
- Belt transmission.
- Limit switch adjusting electronic deceleration and reverse on obstacle detection.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	D600
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	With brushes 24V
Max. power	220 W
Max expressed force	600 N
Lintel max height	35 mm
Courtesy light	230V - 40 W (max)
Courtesy light timing	120 s
Max. carriage speed	6.6 m/min
Carriage speed at slow-down	1.3 m/min
Encoder	Electronic
Noisiness	45 dbA
Operating ambient temperature	-20 °C ÷ +55 °C
Protection class	For internal use only (IP20)
Weight	6.2 Kg
Dimensions (LxDxH)	360 x 200 x 145 mm
Max. door dimension (LxH)	See BELT RAILS table
Electronic equipment	E600 incorporated
Use frequency	Continuous use

FAMILY MODELS

Model	Item code
D600 Dolphin Kit K868	10566515
D600 Dolphin Kit K433	10566516

PACKS

IMPORTANT: a rail (single piece or two pieces with belt drive) must always be ordered with every D600 operator.

D600 includes: an electromechanical operator with electronic control unit and timed courtesy light, accessories for installation, internal release device.

Typical Installation Examples page. 299

ELECTRONIC CONTROL UNITS



E600 electronic control unit incorporated
Info at page 149

2024015

ACCESSORIES



Curved arm for sectional doors

390768



Central track support supplied as standard with two-piece tracks

390765



XBAT 24 emergency battery kit *

390923

>>



Cable and sheath for external release (application to the existing handle)

390488



External key release for doors with thickness greater than 15 mm, from 1 to 10

424591001-10

NOTE

Important: E600/E700 HS/E1000 electronic control units with new technology

 only compatible with the XF 433/XF 868 receiver.

Automations D600 - D700 HS - D1000 can only be equipped with the XL24L flashing light.

To install the external key release you need to use the cable and sheath accessory for external release device.

BELT RAILS

Rack	Door max dimensions L x H (m)	Sectional door max. dimensions L x H (m)	Length of rail (mm)	Carriage max travel (mm)	Item code
Single with belt	3,00 x 2,15	5.00 x 2.02	2400	2020	390120
Single with belt	3,00 x 2,60	5.00 x 2.62	3000	2620	390126
Single with belt	3,00 x 3,20	5.00 x 3.20	3600	3200	390132
Single with belt	3,00 x 3,80	5.00 x 3.80	4200	3800	390139
Two-piece with belt	3,00 x 2,60	5.00 x 2.62	3000	2620	390226
Two-piece with belt	3,00 x 3,20	5.00 x 3.20	3600	3200	390232
Two-piece with belt	3,00 x 3,80	5.00 x 3.80	4200	3800	390239

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



D700 HS

24V Electromechanical operator with belt or chain drive



Maximum traction/thrust force

700 N

Use frequency

Continuous use

- Easy and fast installation thanks to the pre assembled rail and rotation coupling.
- Belt transmission.
- Speed up to 12 m/minute. Double compared to traditional automations!



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	D700 HS
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	With brushes 24V ---
Max. power	440 W
Max expressed force	700 N
Lintel max height	35 mm
Courtesy light	230V - 40 W (max)
Courtesy light timing	120 s
Max. carriage speed	12 m/min
Carriage speed at slow-down	2.5 m/min
Encoder	Electronic
Noisiness	45 dbA
Operating ambient temperature	-20 °C ÷ +55 °C
Protection class	For internal use only (IP20)
Weight	6.3 Kg
Dimensions (LxDxH)	360 x 200 x 145 mm
Max. door dimension (LxH)	See BELT RAILS table
Electronic equipment	E700HS incorporated
Use frequency	Continuous use

FAMILY MODELS

Model	Item code
D700 HS	110602

PACKS

IMPORTANT: a rail (single piece or two pieces with belt drive) must always be ordered with every D700 HS operator.

D700 HS includes: an electromechanical operator with electronic control unit and timed courtesy light, accessories for installation, internal release device.

Typical Installation Examples page. 300

ELECTRONIC CONTROL UNITS



E700 HS electronic control unit (incorporated in automation)
Info at page 149

63002425

ACCESSORIES



Curved arm for sectional doors

390768



Central track support supplied as standard with two-piece tracks

390765



XBAT 24 emergency battery kit *

390923

>>



Cable and sheath for external release (application to the existing handle)

390488



External key release for doors with thickness greater than 15 mm, from 1 to 10

424591001-10

NOTE

Important: E600/E700 HS/E1000 electronic control units with new technology

only compatible with the XF 433/XF 868 receiver.

Automations D600 - D700 HS - D1000 can only be equipped with the XL24L flashing light.

To install the external key release you need to use the cable and sheath accessory for external release device.

BELT RAILS

Rack	Door max dimensions L x H (m)	Sectional door max. dimensions L x H (m)	Length of rail (mm)	Carriage max travel (mm)	Item code
Single with belt	3,00 x 2,15	5.00 x 2.02	2400	2020	390120
Single with belt	3,00 x 2,60	5.00 x 2.62	3000	2620	390126
Single with belt	3,00 x 3,20	5.00 x 3.20	3600	3200	390132
Single with belt	3,00 x 3,80	5.00 x 3.80	4200	3800	390139
Two-piece with belt	3,00 x 2,60	5.00 x 2.62	3000	2620	390226
Two-piece with belt	3,00 x 3,20	5.00 x 3.20	3600	3200	390232
Two-piece with belt	3,00 x 3,80	5.00 x 3.80	4200	3800	390239

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200

D1000

24V Electromechanical operator with belt or chain drive



Maximum traction/thrust force

1000 N

Use frequency

Continuous use



- Easy and fast installation thanks to the pre assembled rail and rotation coupling.
- Belt transmission.
- Limit switch adjusting electronic deceleration and reverse on obstacle detection.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	D1000
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	With brushes 24V 
Max. power	350 W
Max expressed force	1000 N
Lintel max height	35 mm
Courtesy light	230V - 40 W (max)
Courtesy light timing	120 s
Max. carriage speed	6.6 m/min
Carriage speed at slow-down	1.3 m/min
Encoder	Electronic
Noisiness	45 dbA
Operating ambient temperature	-20 °C ÷ +55 °C
Protection class	For internal use only (IP20)
Weight	6.4 Kg
Dimensions (LxDxH)	360 x 200 x 145 mm
Max. door dimension (LxH)	See BELT RAILS table
Electronic equipment	E1000 integrated
Use frequency	Continuous use

FAMILY MODELS

Model	Item code
D1000 Dolphin kit K868	10566615
D1000 Dolphin kit K433	10566616

PACKS

IMPORTANT: a rail (single piece or two pieces with belt drive) must always be ordered with every D1000 operator.

D1000 includes: an electromechanical operator with electronic control unit and timed courtesy light, accessories for installation, internal release device.

Typical Installation Examples page. 300

ELECTRONIC CONTROL UNITS



E1000 electronic control unit (incorporated)
Info at page 149

2024025

ACCESSORIES



Curved arm for sectional doors

390768



GDA 2400 adapter for up and over doors with counterweights of max height 2400 mm

390548



Central track support supplied as standard with two-piece tracks

390765

>>



XBAT 24 emergency battery kit *

390923



Cable and sheath for external release (application to the existing handle)

390488



External key release for doors with thickness greater than 15 mm, from 1 to 10

424591001-10

NOTE

Important: E600/E700 HS/E1000 electronic control units with new technology

only compatible with the XF 433/XF 868 receiver.

Automations D600 - D700 HS - D1000 can only be equipped with the XL24L flashing light.

To install the external key release you need to use the cable and sheath accessory for external release device.

BELT RAILS

Rack	Door max dimensions L x H (m)	Sectional door max. dimensions L x H (m)	Length of rail (mm)	Carriage max travel (mm)	Item code
Single with belt	3,00 x 2,15	5.00 x 2.02	2400	2020	390120
Single with belt	3,00 x 2,60	5.00 x 2.62	3000	2620	390126
Single with belt	3,00 x 3,20	5.00 x 3.20	3600	3200	390132
Single with belt	3,00 x 3,80	5.00 x 3.80	4200	3800	390139
Two-piece with belt	3,00 x 2,60	5.00 x 2.62	3000	2620	390226
Two-piece with belt	3,00 x 3,20	5.00 x 3.20	3600	3200	390232
Two-piece with belt	3,00 x 3,80	5.00 x 3.80	4200	3800	390239

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



AUTOMATIONS FOR UP AND OVER DOORS

AUTOMATIONS FOR UP AND OVER DOORS

Type of installation

Door max dimensions L x H (m)			
3,00 x 2,70	D550*		
3,50 x 3,00		580**	580**
4,00 x 3,00 with 2 operators	D550*		
6,00 x 4,00 with two operators		580**	580**
* electromechanical ** hydraulic			

Typical Installation Examples page. 301

Models of up and over doors with counterweights that can be automated with: 550 - 580



OVERRUNNING



NOT OVERRUNNING



WITH ARTICULATED COVER



D550

230V Electromechanical operator

NEW



Door max dimensions (W x H)

3 x 2,7 m (4 x 3 m with
two operators)

Max. door weight

10 Kg/m2

Use frequency (cycles/hour)

35

- **Integrated LC Function:** Enables low-consumption in stand-by mode, fully compliant with the Ecodesign Directive 2009/125/EC and EU Regulation 2023/826 for improved energy efficiency (Stand-by power consumption <0,5W).
- **Anti-Crushing Safety:** Features an electronic torque adjustment system with an ENCODER, along with independent force and speed regulation for both opening and closing, ensuring optimal safety and performance.
- **Internal and External Unlocking Options:** Includes an internal release mechanism with provision for external unlocking via a custom key, providing flexible access control.
- **Standard LED Lighting:** Standard equipped with built-in LED lighting.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	D550 ITT	D550 Secondary STD
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	Asynchronous single phase	
Max. power	680 W	380 W
Max. torque	400 Nm (*)	
Max. angular speed	12 °/s (*)	
Opening time	15 s	
Encoder	Optical	
Operating ambient temperature	-20 °C ÷ +55 °C	
Thermal protection	140 °C	
Protection class	For internal use only (IP31)	
Weight	9,5 Kg	
Dimensions (LxDxH)	688 x 174 x 115 mm	
Max. door dimension (LxH)	3,00 x 2,70 (**)	4,00 x 3,00 (**)
Max. door weight	10 Kg/m2	
Electronic equipment	Built-in E550S LC	Not included
Use frequency	35 cycles/h	

(*) data referred to 230V~ 50Hz.

(**) For up-and-over doors with a width of 3 to 4 m (h 3 m) use a D550 ITT and a D550 Secondary motor. In this case, the E550S LC control unit which is built-in in the D550 ITT also operates the D550 Secondary motor.

FAMILY MODELS		PACKS
Model	Item code	D550 C includes: an electromechanical operator with built-in control unit, protective cover with integrated wall light, E550 electronic control unit, opening and closing mechanical limit switches, encoder, timed courtesy light, thrust capacitor 10µF 400V (8µF 400V mod. L). D550 includes: an electromechanical operator, protective casing with built-in ceiling light, mechanical opening and closing limit switches, encoder, timed courtesy lamp, a 10µF 400V inrush capacitor (8µF 400V mod. L).
D550 ITT	110123	
D550 ITT L	110127	
D550 Secondary STD	110124	
D550 SECONDARY L	110125	
D550 STD (with integrated limit switches)	110126	
		Typical Installation Examples page. 302

ELECTRONIC CONTROL UNITS		ACCESSORIES		
				
E550S LC low-consumption control unit with jumpered connector Info at page 152 63003556	E550S low-consumption secondary control unit 63003557	Securing longitudinal support length 1.5 m 722136	Securing longitudinal support length 2 m 722140	Packs with two straight telescopic arms 390563

>>					
					
Packs with two curved telescopic arms 390564	Packs with two straight telescopic arms with bush not to be welded 738709	2 transmission pipes 1.5 m, supports, for installation with 1 operator 736022	Pair of transmission tubes, supports, 2 operator installation 390592	External release with customized keys from no. 1 to no. 10 424550001-10	Kit for external release 390607

>>	
	
Kit for IP44 protection class 63003555	External release extension for doors with thickness greater than 15 mm 424551

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200

580

230V Hydraulic operator



Door max dimensions (W x H)

3,5 x 3 m (6 x 4 m with
two operators)

Max. door weight

15 Kg/m²

Use frequency (cycles/hour)

60



- Anti-crushing safety device thanks to an hydraulic device.
- A safe long-lasting, powerful and quiet operator.
- Guaranteed door hold when opening, even in strong wind conditions.



GREENTech
system:
580 + E045S or
E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	580 CBAC
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	220 W
Max. torque	450 Nm (*)
Motor-pump unit capacity	0,75 lpm (*)
Max. angular speed	9°15'/s (*)
Opening time	20
Operating ambient temperature	-20 °C ÷ +55 °C
Thermal protection	120 °C
Protection class	IP55
Type of oil	FAAC HP OIL
Weight	12 Kg
Dimensions (LxDxH)	480 x 96 x 110 mm
Max. door dimension (LxH)	3,50 x 3,00 (**)
Max. door weight	15 Kg/m ²
Electronic equipment	Not included
Use frequency	60 cycles/hour

(*) data referred to 230V~ 50Hz.

(**) For doors with width of over 3,50 m install two operators. An electric lock should be installed for operators without hydraulic locking.

FAMILY MODELS

Model	Item code
580 CBAC	104501

PACKS

580 includes: one hydraulic operator with hydraulic locking in opening and closing (580 CBAC), a 8µF 400V thrust capacitor

Typical Installation Examples page. 301

ELECTRONIC CONTROL UNITS



E045S control unit
Info at page 132

790077



E145S control unit
Info at page 134

790076

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. E for electronic control units

720119



Enclosure mod. L for electronic control units

720118



Enclosure mod. LM for electronic control units

720309

>>



Securing longitudinal support length 1.5 m

722299



External release with key for doors with max thickness 15 mm (from n. 1 to n. 10)

424560001-10



External release with key for doors with thickness over 15 mm (from n. 1 to n. 10)

424560101-10



BUS XIB interface (for E045 or E045S or E034 boards with photocell no BUS)

790062

INSTALLATION MECHANICAL ASSEMBLY



Packs with two straight telescopic arms

390432



Pair of transmission pipes with lateral supports, for installation with 1 operator

390434



2 transmission pipes with lateral supports, for installation with 2 operators

390435

OTHER ACCESSORIES

Key operated buttons
page 180

Safety edges
page 190

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200



AUTOMATION FOR FOLDING DOORS

AUTOMATION FOR FOLDING DOORS

Type of installation

Max width of single panel (m)			
1,50	390 230V	560 CBAC	560 CBAC
2,00		560 SB	560 SB
	electromechanical	hydraulic	

Typical Installation Examples page. 285



390 230V

230V Electromechanical actuator with articulated arm



Max width of single panel

1,5 m

Use frequency (cycles/hour)

S3 - 30%

- Opening through telescopic arm.
- Operator installation directly on one of the two panels.
- Manual release device which can be activated from inside or outside the property.



GREENTech 230V
system:
390 230V + E045S
or E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	390 230V
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Max. power	280 W
Max. torque	250 Nm (*)
Max. angular speed	8 °/s (*)
Max. leaf opening angle	120°
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	140°C
Protection class	IP44
Weight	11.5 Kg
Use frequency	S3 - 30%
Max. leaf width	1.8 m (3 m with electric lock)
Dimensions (LxDxH)	412 x 133 x 134 mm
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz

FAMILY MODELS

Model	Item code
390 230V	104570

PACKS

390 230V includes: an electromechanical operator, accessories for installation, a thrust capacitor 8μF 400V, a release key.

ELECTRONIC CONTROL UNITS



E045S control unit
Info at page 132

790077



E145S control unit
Info at page 134

790076

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for
electronic control units

720118



Enclosure mod. E for
electronic control units

720119



Enclosure mod. LM for
electronic control units

720309

>>



Telescopic arm
(application for folding
doors)

738706



External release
device with cable and
sheath
Length 5 m

401057



Single limit switch kit
(opening or closing)

390682



BUS XIB interface
(for E045 or E045S
or E034 boards with
photocell no BUS)

790062

NOTE

IMPORTANT: the 390 operators must be provided with a jointed arm (swing gate) or with a telescopic arm (for folding doors).

For a two-panel folding door, fit two operators, two articulated arms and electronic control unit.

The 390 operators can be equipped with an opening and a closing limit switch. For management of the limit switches on the 390, you need to use the E145S board.

Accessories: compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

560

230V Hydraulic operator



Max width of single panel

1,5 - 2 m

Use frequency (cycles/hour)

50

- Ideal for bi-folding doors. Opening and closing through telescopic arm.
- In case of power cut the release device on the operator makes it possible to open and close the gate manually.
- Anti-crushing guaranteed by a pair of by-pass valves.



GREENTech
system:
560 + E045S or
E145S



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	560 CBAC	560 SB
Power supply voltage	220-240V~ 50/60 Hz	
Electric motor	Asynchronous single phase	
Max. power	220 W	
Max. torque	320 Nm (*)	
Max. angular speed	12,4 °/s (*)	
Motor-pump unit capacity	1 lpm (*)	
Operating ambient temperature	-20 °C ÷ +55 °C	
Thermal protection	120°C	
Protection class	IP55	
Type of oil	FAAC HP OIL	
Weight	12 Kg	
Dimensions (LxDxH)	480 x 85 x 110 mm	
Electronic equipment	Not included	
Max. leaf width	1,50 m (single panel)	2,00 m (single panel)
Use frequency	80 cycles/hour	

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
560 CBAC	104561
560 SB	104562

PACKS

560 includes: a hydraulic operator - with hydraulic lock in opening and closing (**560 CBAC**) - without hydraulic block (**560 SB**) - a thrust capacitor 8 uF 400 V.

ELECTRONIC CONTROL UNITS



E045S control unit
Info at page 132

790077



E145S control unit
Info at page 134

790076

These control units are available while supplies last and will soon be replaced by models E045S LC and E145S LC.

ACCESSORIES



Enclosure mod. L for
electronic control units

720118



Enclosure mod. E for
electronic control units

720119



Enclosure mod. LM for
electronic control units

720309

>>



Articulated telescopic
arm with accessories
for installation

738700



Standard telescopic
arm with accessories
for installation

738703



Manual pulley release

490251



BUS XIB interface
(for E045 or E045S
or E034 boards with
photocell no BUS)

790062

NOTE

 : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity module

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

AUTOMATIC BARRIERS

AUTOMATIC BARRIERS

Type of installation

	B614	615BPR Rapid	615BPR Standard	620 Standard		B680H
		615BPR Rapid	615BPR Standard	620 Standard	620 Rapid	B680H
						B680H
					620 Rapid	B680H
Use cycles	Use continuous	40%	50%	70%	Use continuous	Use continuous
Max beam length	5	2,5	5	5	4	8,3
Opening time (s)	< 2	3	6	from 3,5 to 4,5	from 2 to 3	from 1,5 to 6

Typical Installation Examples page. 303

B614

Automatic barrier 24V



Max beam length

6 m

Opening time

<2 s (80° with 3 m beam)

Use frequency

Continuous use

- Maximum Anti-crushing safety and motor with integrated encoder
- Speed adjustment and smooth operation.
- Integrated control unit in the upper part of the beam body, i.e easy maintenace and intuitive programming



Watch the video
vimeo.com/faacgroup/b614-en



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	B614
Power supply voltage	220-240V ~ 50/60 Hz
Electric motor	With brushes 24V 
Max. power	165 W
Max. torque	300 Nm
Material type	Steel
Type of treatment	Pre-hot dip galvanized, 20µm thick + polyester powder coated
Encoder	Incremental integrated in the motor
Type of deceleration	Electronic + mechanic
Type of beam	Rectangular and round
Operating ambient temperature	-20°C ÷ +55°C
Protection class	IP55 (Electronic control unit) - IP44
Weight	40 Kg
Dimensions (LxDxH)	360 x 250 x 1163 mm (installation base 305 x 230 mm)
Beam max length	6 m
Opening time	< 2 s (80°- 3m)
Use frequency	Continuous use
Electronic equipment	E614

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
B614 Red RAL 3020	104614
B614 Grey RAL 9006	1046143
B614 Black Grey RAL 7021	1046142

PACKS

B614 includes: barrier cabinet, electromechanical gearmotor and transmission unit, electronic control unit, installation accessories, a triangular release key.

Typical Installation Examples page. 303

ELECTRONIC CONTROL UNITS



E614 Control unit
(built-in)
Info at page 153

63001034

COMMON ACCESSORIES FOR ALL APPLICATIONS



Skirt kit length 2 m

428441



Skirt kit length 3 m

428446



Adjustable end foot for
beam support

428805



Support plate for fork

737621



Adjustable fork for
beam support

428806



Foundation plate

490183

>>



B614 integrated
flashing traffic light

410032



Supplementary
triangular release key
(10 pcs. pack)

713002



XBAT 24 emergency
battery kit *

390923

OTHER
ACCESSORIES

Key operated
buttons
page 180

Laser Sensors
page 196

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

ROUND BEAMS S - Ø 75MM (ADHESIVE LABELS NOT INCLUDED) AND SPECIFIC ACCESSORIES

Length (mm)	Item code
2.000 *	428046
2.300	428045
3.300	428042
4.300 *	428043
5.000	428002
Joint *	428615

The round S beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.

* Codes to be purchased in order to obtain 6mt boom



Fixing bracket for round beams S 615/620/B614 ♦

428445



Articulated kit for round beam S (max 4 m)

428444



Luminous cord 12 m pack

390993

>>

BALANCING SPRINGS FOR ROUND BEAMS S



Adhesive reflector kit (6 pcs.)

490117



Beam light connection kit

390992



Balancing spring for B614

721209



Double spring fittings pack ♦

490186




Balancing spring for 6mt boom barrier

721232

NUMBER OF NEEDED SPRINGS

Number of springs	Beam (mm)	With lights (mm)	With skirt (mm)	Beam with end foot (mm)	With lights and end foot (mm)	Beam with lights and skirt (mm)	Beam with skirt and end foot (mm)	Beam with lights, skirt and end foot (mm)	With articulation kit (mm)
1 Code 721209	1900 ÷ 4400	1800 ÷ 4150	1700 ÷ 3740	1400 ÷ 3750	1400 ÷ 3650	1550 ÷ 3550	1750 ÷ 3250	1750 ÷ 2540	2300 ÷ 3300
									3310 ÷ 3800
									(if A ≤ 2500)
									3810 ÷ 4800
2 Code 721209	4410 ÷ 4900	4160 ÷ 4900	3750 ÷ 4900	3760 ÷ 4900	3660 ÷ 4900	3560 ÷ 4900	3260 ÷ 4550	2550 ÷ 4100	(if A ≤ 2200)
									3310 ÷ 3800
									(if A > 2500)
									3810 ÷ 4800
2 Code 721232	4900 ÷ 6000	4900 ÷ 6000							(if A > 2200)

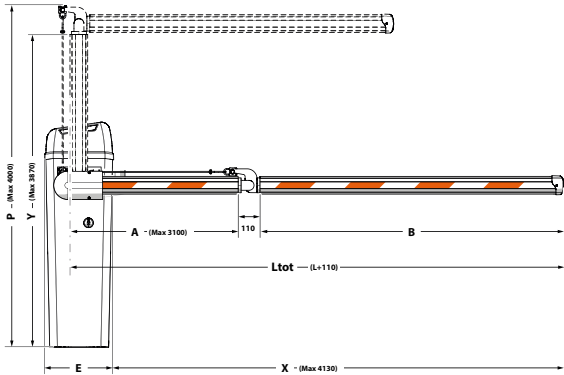

Misure (mm)
Dimensions (mm)
Größe (mm)
Dimensie (mm)

A	P - 900
B	L - A
E	360
X	L - 170
L	A+B (Max 4300)

NOTE

- ♦ Use if two balancing springs are required.
- ♦ The beam bracket is not included in the cabinet and must be ordered separately

RECTANGULAR BEAMS AND SPECIFIC ACCESSORIES



Rectangular standard beam

Length (mm)	Item code
2.315	428088
2.815	428089
3.815	428090
4.815	428091

The rectangular beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.



Beam bracket for rectangular beam ♦

428342



Articulation kit - H max ceiling 3 m (only for rectangular standard beams)

428137

>>

BALANCING SPRINGS FOR RECTANGULAR BEAMS



Beam light connection kit

390992



Luminous cord 12 m pack

390993



Rectangular beam light connection kit ♦

390184



Balancing spring for B614

721209




Double spring fittings pack ♦

490186

NUMBER OF NEEDED SPRINGS

Number of springs	Beam (mm)	With lights (mm)	With skirt (mm)	Beam with end foot (mm)	Beam with skirt and end foot (mm)	With articulation kit (mm)
1	1850 ÷ 4300	1800 ÷ 4100	1650 ÷ 3800	1350 ÷ 3700	1750 ÷ 3350	1850 ÷ 2815 2816 ÷ 3315 (if A ≤ 1600) 3316 ÷ 3815 (if A ≤ 1250)
2	4310 ÷ 4810	4110 ÷ 4810	3810 ÷ 4810	3700 ÷ 4810	3360 ÷ 4700	2816 ÷ 3315 (if A > 1600) 3316 ÷ 3815 (if A > 1250)

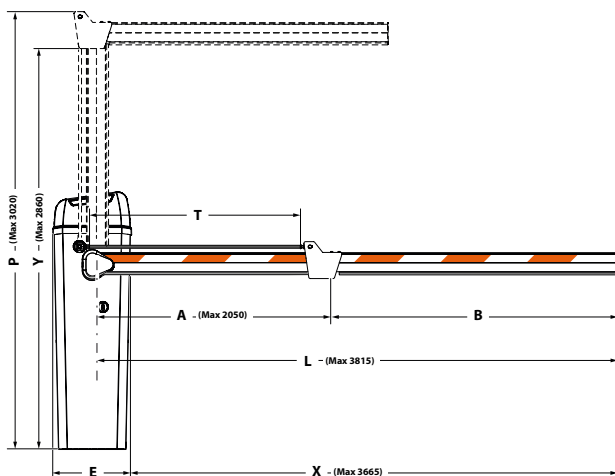

Misure (mm)
Dimensions (mm)
Größe (mm)
Dimensie (mm)

A	P - 970
B	L - A
T	A - 50
E	360
X	L - 150

NOTE

- ♦ The beam bracket is not included in the cabinet and must be ordered separately
- ♦ Use if two balancing springs are required.
- ♦ Replace the black shockproof rubber profile with the red one supplied when installing the kit. The kit cannot be used together with other accessories installed on the beam.

615BPR

Automatic Barrier 230V



Max beam length

5 m

Opening time

2,5 - 5,7 s

Use frequency

40% - 50%

- Hydraulic operator with opening and closing lock.
- Ideal for medium transit frequency and for controlling small and medium private areas.
- Standard version equipped with limit switches and anti-crushing hydraulic safety device



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	615BPR Standard Orange RAL 2004	615BPR Standard Grey RAL 9006	615BPR Rapid
Power supply voltage	220-240V~ 50/60 Hz		
Electric motor	Asynchronous single phase		
Motor rotation speed	1.400 rpm (*)		2.800 rpm (*)
Max. power	220 W		
Max. torque	0 ÷ 400 Nm (*)		0 ÷ 300 Nm (*)
Motor-pump unit capacity	1,5 lpm (*)		3 lpm (*)
Material type	Steel		
Type of treatment	100 micron protective primer + polyester painting RAL 2004 - RAL 9006	100 micron zinc epoxy galvanisation + polyester painting RAL 2004	
Encoder	No - anti-crushing hydraulic safety device		
Type of deceleration	Electronic - Adjustable		
Type of beam	Rectangular - Rectangular with skirt - Articulated - Round with lights	Rectangular - Rectangular with skirt - Rectangular articulated - Round	
Operating ambient temperature	-20°C ÷ +55°C		
Thermal protection	120°C		
Protection class	IP44		
Weight	34 Kg		
Type of oil	FAAC HP OIL		
Dimensions (LxDxH)	270 x 140 x 1015 mm		
Beam max length	5 m		2.5 m
Opening time	5,7 s (90°)		3 s (90°)
Use frequency	50%		40%
Electronic equipment	615BPR incorporated		

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
615BPR Standard Orange RAL 2004	104906
615BPR Standard Grey RAL 9006	104910
615BPR Rapid Orange RAL 2004	104907
615BPR Rapid Grey RAL 9006	104911

PACKS

615BPR includes: barrier body, hydraulic transmission system complete with hydraulic control unit and double-acting piston, integrated 615BPR control unit, installation accessories, a triangular release key.

Typical Installation Examples page. 303

ELECTRONIC CONTROL UNITS



615BPR control unit
(incorporated in
automation)
Info at page 154

790281

COMMON ACCESSORIES FOR ALL APPLICATIONS



Skirt kit length 2 m ♦

428441



Skirt kit length 3 m ♦

428446



Adjustable fork for
beam support

428806



Support plate for fork

737621



Adjustable end foot for
beam support ♦

428805



Foundation plate

490073

>>



Anti-vandalism valve

401066



Supplementary
triangular release key
(10 pcs. pack)

713002

NOTE

IMPORTANT: the rectangular and S beams have an anti-impact rubber profile; for balancing reasons, “active” safety edges cannot be installed on the beam profile.

♦ For correct balancing, installing an end foot on a beam and on a beam with skirt requires a barrier cabinet for a beam length greater than 0.5 m.

OTHER
ACCESSORIES

Key operated
buttons
page 180

Laser Sensors
page 196

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

ROUND BEAMS S - Ø 75MM (ADHESIVE LABELS NOT INCLUDED) AND SPECIFIC ACCESSORIES



Round beams S - Ø 75 mm (adhesive labels not included)

Length	Item Code
2.300	428045
3.300	428042
4.300	428043
5.000	428002
The round S beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the “active” safety edge.	



Fixing bracket for round beams S 615/620/B614 ♦

428445



Beam light connection kit 615

390081

>>



Luminous cord 12 m pack

390993



Adhesive reflector kit (6 pcs.)

490117

BALANCING SPRINGS FOR ROUND S BEAMS

Ø (mm)	Round beam S (mm)	Round beam S with end foot (mm)	Round beam S with skirt (mm)	Round beam S with skirt and end foot (mm)	Item code
5,5	0 ÷ 2.300	0 ÷ 2.300	0 ÷ 2.300		721008
6,0	2.310 ÷ 3.300			0 ÷ 2.300	721005
7,0	3.310 ÷ 4.300	2.310 ÷ 3.300	2.310 ÷ 3.300	2.310 ÷ 3.300	721006
8,0	4.310 ÷ 5.000	3.310 ÷ 4.300	3.310 ÷ 4.300		721018

the balancing springs are not included in the cabinet and must be ordered separately. For use of the skirt kit and/or end foot, we advise you to select the most suitable balancing spring.

BALANCING SPRINGS FOR ROUND S BEAMS WITH LIGHTS

Ø (mm)	Round beam S with lights (mm)	Round beam S with lights and end foot (mm)	Round beam S with lights and skirt (mm)	Round beam S with lights, skirt and end foot (mm)	Item code
5,5	0 ÷ 2.300	0 ÷ 2.300			721008
6,0	2.310 ÷ 3.300		0 ÷ 2.300	0 ÷ 2.300	721005
7,5	3.310 ÷ 4.300	2.310 ÷ 3.300	2.310 ÷ 3.300	2.310 ÷ 3.300	721007
8,0	4.310 ÷ 5.000	3.310 ÷ 4.300	3.310 ÷ 4.300		721018

the balancing springs are not included in the cabinet and must be ordered separately. For use of the skirt kit and/or end foot, we advise you to select the most suitable balancing spring.

NOTE

♦ The beam bracket is not included in the cabinet and must be ordered separately

RECTANGULAR BEAMS AND SPECIFIC ACCESSORIES



Rectangular standard beam

Length (mm)	Item code
2.315	428088
2.815	428089
3.815	428090
4.815	428091

The rectangular beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.



Beam bracket for rectangular beam ♦

428342



Articulation kit - H max ceiling 3 m (only for rectangular standard beams)

428137

>>

NOTE

- ♦ The beam bracket is not included in the cabinet and must be ordered separately
- ♦ Replace the black shockproof rubber profile with the red one supplied when installing the kit. The kit cannot be used together with other accessories installed on the beam.



Beam light connection kit 615

390081



Luminous cord 12 m pack

390993



Rectangular beam light connection kit ♦


390184

BALANCING SPRINGS FOR RECTANGUAL BEAMS

Ø (mm)	Rectangular beams	Rect. beams with lights (mm)	Rect. beams with skirt (mm)	Rect. Beams with end foot (mm)	Rect. beams with skirt and end foot (mm)	Item code
5,5	1.315 ÷ 2.315	1.315 ÷ 2.315	1.315 ÷ 2.315	1.315 ÷ 1.815	1.315 ÷ 1.815	721008
6,0	2.316 ÷ 2.815	2.316 ÷ 2.815	2.316 ÷ 2.815	1.816 ÷ 2.315	1.816 ÷ 2.315	721005
7,0	2.816 ÷ 3.815	2.816 ÷ 3.670		2.316 ÷ 2.815		721006
7,5			2.816 ÷ 3.815		2.316 ÷ 3.315	721007
8,0	3.816 ÷ 4.815	3.671 ÷ 4.815		2.816 ÷ 3.815		721018

the balancing springs are not included in the cabinet and must be ordered separately. For use of the skirt kit and/or end foot, we advise you to select the most suitable balancing spring.

ARTICULATED BEAMS

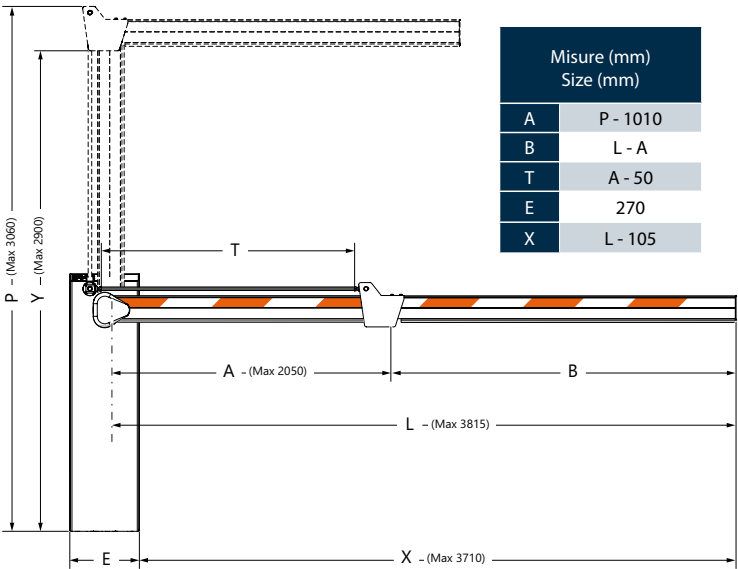

Misure (mm) Size (mm)	
A	P - 1010
B	L - A
T	A - 50
E	270
X	L - 105

ARTICULATED 615 BALANCING SPRINGS

BALANCING SPRINGS CODES						
A	mm	3815	3315	2815	2315	1815
	750	721007	721006	721006	721005	721008
	1000	721007	721006	721006	721005	721008
	1250	721007	721006	721006	721005	721008
	1500	721007	721006	721006	721005	721005
	1750	721007	721006	721006	721006	721005
	2050	721007	721007	721006	721006	
L						

620 Standard

Automatic Barrier 230V



Max beam length

4 - 5 m

Opening time

3,5 - 4,5 s

Use frequency

70%



- Patented electronic deceleration and barriers status signalling through traffic management devices.
- The ideal solution for heavy but not continuous traffic.
- Two channels integrated detector and 11 pre-set logics



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	620 Standard
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Motor rotation speed	1400 rpm (*)
Max. power	220 W
Max. torque	0 ÷ 220 / 0 ÷ 180 Nm (*)
Motor-pump unit capacity	0,75-1 lpm (*)
Material type	Steel
Type of treatment	100 micron protective primer + polyester painting RAL 2004
Encoder	No - anti-crushing hydraulic safety device
Type of deceleration	Electronic - Adjustable with cams
Type of beam	Rectangular - Rectangular with skirt - Articulated - Round - Round pivoting
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	120°C
Protection class	IP44
Weight	73 Kg
Type of oil	FAAC HP OIL
Dimensions (LxDxH)	350 x 170 x 1080 mm
Beam max length	5 m
Opening time	3,5 s (90° - 3 m) - 4,5 s (90° - 4 m)
Use frequency	70%
Electronic equipment	624BLD incorporated

(*) data referred to 230V~ 50Hz.


FAMILY MODELS		PACKS
Model	Item code	620 Standard includes: barrier body - for a rectangular / round / pivoting round / S-round beam (620 Standard) - for a jointed rectangular beam (jointed 620 Standard), oil-hydraulic movement transmission system complete with a balancing spring, incorporated 624BLD electronic board, installation accessories, one triangular release key.
620 standard L/R	See table below	

Typical Installation Examples page. 304

BARRIER ORDERING CODES TABLE				
Model	Beam	Beam length (mm)	LH version code	RH version code
620 Standard	620 rectangular standard	1.315 ÷ 2.055	1046268	-
		2.065 ÷ 2.555	1046208	1046408
		2.565 ÷ 3.055	1046278	1046478
		3.065 ÷ 3.815	1046288	1046488
		3.825 ÷ 4.815	1046228	1046428
	620 rectangular standard with lights	1.315 ÷ 2.055	1046268	-
		2.065 ÷ 2.555	1046208	1046408
		2.565 ÷ 3.055	1046278	1046478
		3.065 ÷ 3.665	1046288	1046488
		3.675 ÷ 4.490	1046228	1046428
	620 rectangular standard with skirt	4.500 ÷ 4.815	1047508	1047518
		1.815 ÷ 2.805	1046208	1046408
		2.815 ÷ 3.555	1046218	1046418
		3.565 ÷ 3.815	1046228	1046428
	620 round S	3.825 ÷ 4.815	1047508	1047518
		0 ÷ 2.300	1046268	-
		2.310 ÷ 2.800	1046208	1046408
		2.810 ÷ 3.300	1046278	1046478
		3.310 ÷ 3.800	1046288	1046488
	620 round S with skirt	3.810 ÷ 4.300	1046228	1046428
		4.310 ÷ 5.000	1046228	1046428
		0 ÷ 2.300	1046268	-
		2.310 ÷ 2.800	1046208	1046408
		2.810 ÷ 3.300	1046218	1046418
	620 round pivoting	3.310 ÷ 3.800	1046228	1046428
		3.810 ÷ 4.300	1047508	1047518
		4.310 ÷ 5.000	1047508	1047518
620 Standard ARTICULATED	620 rectangular articulated A(*) = 1315 ÷ 1814 mm	1.500 ÷ 2.240	1046268	-
		2.250 ÷ 2.740	1046208	1046408
		2.750 ÷ 3.000	1046278	1046478
	620 rectangular articulated A(*) = 1815 ÷ 2075 mm	2.825 ÷ 3.815	1047048	1047148
		1.825 ÷ 2.815	1047048	1047148

(*) A = H - 1125 (mm) where H is the floor to ceiling height.

For correct balancing, the installation of a foot on a beam and on a beam with skirt, requires a barrier cabinet for beam lengths greater than 0.5m.

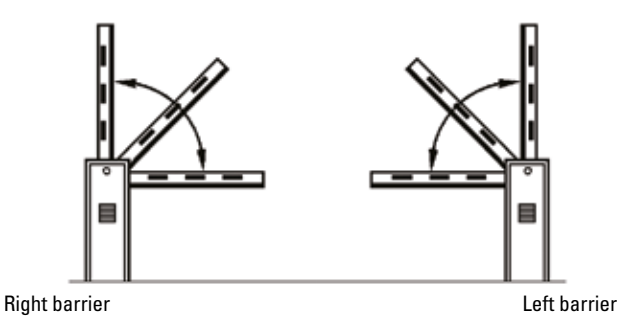

NOTE

You can determine right or left barrier version by looking at the barrier from the door side (see drawing).The door usually faces the inside of the property.

620 Standard

ELECTRONIC CONTROL UNITS



624BLD electronic control unit (incorporated)
Info at page 155

2022715

COMMON ACCESSORIES FOR ALL APPLICATIONS



Foundation plate

490058



Skirt kit length 2 m ♦

428441



Skirt kit length 3 m ♦

428446

>>



Adjustable fork for beam support

428806



Support plate for fork

737621



Adjustable end foot for beam support

428805



Anti-vandalism valve

401066



Anti-panic unit ♦

401051



Release lock with customised key (from n. 1 to n. 10)

424641-50

>>



Supplementary triangular release key (10 pcs. pack)

713002

PIVOTING ROUND BEAMS AND SPECIFIC ACCESSORIES



Pivoting round beams

Length (mm)	Item code
3.000	428176
It is not possible to install skirt kits, end foot and fork on the new round pivoting beams.	



Beam bracket for pivot round beam - (STAINLESS STEEL)

428163



Break-in sensor for pivoting round beams

390828

NOTE

- ♦ For correct balancing, installing an end foot on a beam and on a beam with skirt requires a barrier cabinet for a beam length greater than 0.5 m.
- ◆ The anti-panic unit and the anti-vandal valve cannot coexist on the same barrier. It allows manual opening of the beam in case of power cut.

ROUND BEAMS S - Ø 75MM (ADHESIVE LABLES NOT INCLUDED) AND SPECIFIC ACCESSORIES



Round beams S - Ø 75 mm
(adhesive labels not included)

Length (mm)	Item code
2.000 *	428046
2.300	428045
3.300	428042
4.300 *	428043
5.000	428002
Joint *	428615
The round S beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.	
* Codes to be purchased in order to obtain 6mt boom	

>>



Luminous cord 12 m pack

390993



Adhesive reflector kit (6 pcs.)

490117



Fixing bracket for round beams S 615/620/B614 ♦

428445



Beam light connection kit

390992

RECTANGULAR BEAMS AND SPECIFIC ACCESSORIES



Rectangular standard beam

Length (mm)	Item code
2.315	428088
2.815	428089
3.815	428090
4.815	428091
The rectangular beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.	



Beam bracket for rectangular beam ♦

428342



Articulation kit - H max ceiling 3 m (only for rectangular standard beams)

428137

>>

NOTE

- ♦ The beam bracket is not included in the cabinet and must be ordered separately
- ♦ Replace the black shockproof rubber profile with the red one supplied when installing the kit. The kit cannot be used together with other accessories installed on the beam.



Beam light connection kit

390992



Luminous cord 12 m pack

390993



Rectangular beam light connection kit ♦

390184

OTHER ACCESSORIES

Key operated buttons
page 180

Laser Sensors
page 196

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200

620 Rapid

Automatic Barrier 230V



Max beam length

3 - 3,8 m

Opening time

2 - 3 s

Use frequency

Continuous use



- Patented electronic deceleration and barriers status signalling through traffic management devices.
- Ideal for heavy traffic, where fast opening is a must.
- Two channels integrated detector and 11 pre-set logics



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	620 Rapid
Power supply voltage	220-240V~ 50/60 Hz
Electric motor	Asynchronous single phase
Motor rotation speed	1.400 - 2.800 rpm (*)
Max. power	220 W
Max. torque	0 ÷ 150 / 0 ÷ 140 Nm (*)
Motor-pump unit capacity	1,5 - 2 lpm (*)
Material type	Steel
Type of treatment	100 micron protective primer + polyester painting RAL 2004
Encoder	No - anti-crushing hydraulic safety device
Type of deceleration	Electronic - Adjustable with cams
Type of beam	Rectangular - Articulated - Round - Pivoting round
Operating ambient temperature	-20°C ÷ +55°C
Thermal protection	120°C
Cooling	With forced air
Protection class	IP44
Weight	73 Kg
Type of oil	FAAC HP OIL
Dimensions (LxDxH)	350 x 170 x 1080 mm
Beam max length	3.8 m
Opening time	2 s (90° - 3 m) - 3 s (90° - 4 m)
Use frequency	100%
Electronic equipment	624BLD incorporated

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code
620 Rapid L/R	See table below

PACKS

620 Rapid includes: barrier body - for a rectangular / round / pivoting round / S-round beam (620 Rapida) - for a jointed rectangular beam (jointed 620 Rapida), oil-hydraulic movement transmission system complete with a balancing spring, incorporated 624BLD electronic board, installation accessories, one triangular release key.


Typical Installation Examples page. 304

BARRIER ORDERING CODES TABLE

Model	Beam	Beam length (mm)	LH version code	RH version code
620 Rapid	620 rectangular standard	2.065 ÷ 2.555	1046338	1046538
		2.565 ÷ 3.055	1046348	1046548
		3.065 ÷ 3.815	1046358	1046558
	620 rectangular with lights	2.065 ÷ 2.555	1046338	1046538
		2.565 ÷ 3.055	1046348	1046548
		3.065 ÷ 3.665	1046358	1046558
	620 round S	2.310 ÷ 2.800	1046338	1046538
		2.810 ÷ 3.300	1046348	1046548
	620 round pivoting	2.250 ÷ 2.740	1046338	1046538
		2.750 ÷ 3.000	1046348	1046548

(*) $A = H - 1155 \text{ mm}$ where H is the floor to ceiling height.

For correct balancing, the installation of a foot on a beam and on a beam with skirt, requires a barrier cabinet for beam lengths greater than 0.5m.

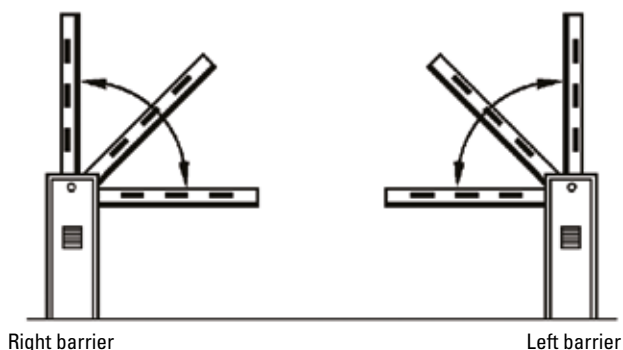

NOTE

You can determine right or left barrier version by looking at the barrier from the door side (see drawing). The door usually faces the inside of the property.

The 620 Rapid barrier does not allow the installation of end foot and/or skirt kit.

620 Rapid

ELECTRONIC CONTROL UNITS



624BLD electronic control unit (incorporated)
Info at page 155

2022715

COMMON ACCESSORIES FOR ALL APPLICATIONS



Foundation plate

490058



Adjustable fork for beam support

428806



Support plate for fork

737621

>>



Anti-vandalism valve

401066



Anti-panic unit ♦

401051



Supplementary triangular release key (10 pcs. pack)

713002



Release lock with customised key (from n. 1 to n. 10)

424641-50

NOTE

♦ The anti-panic unit and the anti-vandal valve cannot coexist on the same barrier. It allows manual opening of the beam in case of power cut.

ROUND BEAMS S - Ø 75MM (ADHESIVE LABELS NOT INCLUDED) AND SPECIFIC ACCESSORIES



Round beams S - Ø 75 mm (adhesive labels not included)

Length (mm)	Item code
2.300	428045
3.300	428042

The round S beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.

For correct balancing, installing lights on a round beam or on a round beam with skirt, for lengths greater than 2,800 mm, requires a barrier cabinet for a beam length greater than 0.5m. N.B. In case of beam with end foot and lights consider 1m (0,5 m lights + 0,5 m end foot).



Fixing bracket for round beams S 615/620/B614 ♦

428445



Beam light connection kit

390992

>>

NOTE

♦ The beam bracket is not included in the cabinet and must be ordered separately



Luminous cord 12 m pack

390993



Adhesive reflector kit (6 pcs.)

490117

RECTANGULAR BEAMS AND SPECIFIC ACCESSORIES

	Length (mm)	Item code
	2.315	428088
	2.815	428089
	3.815	428090
The rectangular beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.		

Rectangular standard beam



Beam bracket for rectangular beam

428342



Articulation kit - H max ceiling 3 m (only for rectangular standard beams)

428137

>>

NOTE

- ◆ The beam bracket is not included in the cabinet and must be ordered separately
- ◆ Replace the black shockproof rubber profile with the red one supplied when installing the kit. The kit cannot be used together with other accessories installed on the beam.



Beam light connection kit

390992



Luminous cord 12 m pack

390993



Rectangular beam light connection kit

390184

PIVOTING ROUND BEAMS AND SPECIFIC ACCESSORIES

	Length (mm)	Item code
	3.000	428176
It is not possible to install skirt kits, end foot and fork on the new round pivoting beams.		

Pivoting round beams



Beam bracket for pivot round beam - (STAINLESS STEEL)

428163



Break-in sensor for pivoting round beams

390828

OTHER ACCESSORIES

Key operated buttons
page 180

Laser Sensors
page 196

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200

B680H

Automatic 24V Hybrid Barrier



Max beam length

2 - 8 m

Opening time

1,5 - 6 s

Use frequency

- 2,000,000 cycles thanks to the Brushless + Hydraulic motor and **"unlimited" springs**
- Removable cabinet available in 4 colours or stainless steel.
- High logistic optimization: a single barrier model suitable for all lengths.

Continuous use



Watch the video
vimeo.com/faacgroup/b680h-en



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	B680H
Power supply voltage	Switching: 100 ÷ 240V~ 50/60 Hz
Electric motor	Brushless 36V 
Motor rotation speed	1000 ÷ 6000 rpm
Max. power	240 W
Motor-pump unit capacity	3.2 lpm
Material type	Steel
Type of treatment	100 micron protective primer + polyester painting or stainless steel cabinet
Encoder	Magnetic absolute encoder
Type of deceleration	Electronic - via encoder
Type of beam	Round
Operating ambient temperature	-20°C ÷ +65°C
Protection class	IP56 (TÜV certified)
Weight	85 Kg (65 Kg pillar + 20 Kg cabinet)
Type of oil	FAAC HP OIL
Dimensions (LxDxH)	469 x 279 x 1100 mm
Beam max length	2 ÷ 8 m
Opening time	1,5 s (90° - 2m) - 6 s (90° - 8m)
Use frequency	100%
Electronic equipment	E680

FAMILY MODELS

Model	Item code
B680H	104680

PACKS

B680H includes: barrier cabinet with electronic equipment and absolute encoder, hydraulic drive transmission system, installation accessories, triangular release key.
DOES NOT include beam bracket, balancing spring (sold together with another code) and the cabinet.

Typical Installation Examples page. 305

ELECTRONIC CONTROL UNITS



E680S Control Unit
Info at page 156

63003452

CABINETS



Red cabinet RAL 3020

416016



Cabinet
Blue RAL 5011

416017



Cabinet
White RAL 9010

416018

>>



Cabinet
Grey RAL 9006

416019



Stainless steel cabinet

416020

PIVOTING ROUND BEAMS AND SPECIFIC ACCESSORIES



Pivoting round beams

Length (mm)	Item code
3.000	428176
It is not possible to install skirt kits, end foot and fork on the new round pivoting beams.	



Beam bracket for
pivot round beam -
(STAINLESS STEEL)

428163



S Spring
(required for pivoting
round beams)

63000169

>>



Break-in sensor for
pivoting round beams

390828

BEAMS S: UP TO 5 M PASSAGE WIDTH




Pocket and balancing S spring

428436

Accessories for round beams S based on the effective span of the passage	Lights	Skirt	End foot
up to 4.5 m	X	X	X
from 4.5 m to 5 m	X		
from 4.5 m to 5 m modular (with collar assembly)			


- All beams are provided with protective rubber on the lower side and provision for lights on the upper side. The adhesive reflectors are not included.
- The beam profiles have a 75 mm round section in order to be effective also in windy areas.
- The joint of the modular beams is invisible after installation.

WHOLE BEAMS S



Model	Item code
Whole Beam S 2.3 m	428045
Whole Beam S 3.3 m	428042
Whole Beam S 4.3 m	428043
Whole Beam S 5.3 m	428044

MODULAR BEAMS S



Model	Item code
Joint S	428615
Initial Beam S 2.3 m	428045
Initial Beam S 3.3 m	428042
Final Beam S 2 m	428046

BEAMS L: FROM 5 M UP TO 8 M PASSAGE WIDTH




Pocket and balancing L spring

428437

Accessories for round beams L based on the effective span of the passage	Lights	Skirt	End foot
from 5 m to 7 m	X	X	X
from 7 m to 7.5 m	X	X (without end foot)	X (without skirt)
from 7.5 m to 8 m	X		X


- All beams are provided with protective rubber on the lower side and provision for lights on the upper side. The adhesive reflectors are not included.
- The beam profiles have a 85 x 95 mm elliptical section in order to be effective also in windy areas.
- The joint of the modular beams is invisible after installation.

WHOLE BEAMS L



Model	Item code
Whole Beam L 5.3 m	428047

MODULAR BEAMS L



Model	Item code
Joint L	428616
Initial Beam L 4 m	428048
Final Beam L 2.3 m	428049
Final Beam L 3.3 m	428050
Final Beam L 4.3 m	428051

COMMON ACCESSORIES FOR ALL APPLICATIONS



Foundation plate

490139



Skirt kit length 2 m

428441



Skirt kit length 3 m

428446



Adjustable fork for beam support

428806



Support plate for fork

737621



Adjustable end foot for beam support

428805

>>



Articulated kit for round beam S (max 4 m)

428444



Integrated flashing traffic light ♦

410033



Beam light connection kit

390992



Luminous cord 12 m pack

390993



XBAT 24 emergency battery kit ♦

390923



XBAT connection kit (to be ordered with 390923)

390080

>>



Adhesive reflector kit (6 pcs.)

490117



Supplementary triangular release key (10 pcs. pack)

713002



Release lock with customised key

71209101-10



Anti-vandal valve protects the hydraulic system if the beam is forced

401069



Anti-panic unit ♦

401051

NOTE

- ♦ It is also possible to connect the XLED external flashing light
- ♦ The anti-panic unit and the anti-vandal valve cannot coexist on the same barrier. It allows manual opening of the beam in case of power cut.
- Interlocking** : compatible with XMBX (GSM) or XWBL (Wifi/Lan) connectivity modules

OTHER ACCESSORIES

Key operated buttons
page 180

Laser Sensors
page 196

Transmitters and receivers
page 168

Photocells and columns
page 188

Flashing lights
page 199

Various accessories
page 200

115V and WINTER

SWING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Single-leaf max. width	Use		Control unit	Item code
					Use frequency (cycles/hour)			
413 LS 115V	X	-	-	1.8 m	35		Not included	1044142

SWING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Single-leaf max. width	Use		Control unit	Item code
					Use frequency (cycles/hour)			
415 115V UL/CSA	X	X	-	2.5 m (3 m with electric lock)	30		Not included	1044152

SLIDING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Max weight	Use		Control unit	Item code
					Speed	Use frequency		
844 ER Z16 115V UL/CSA	X	X	-	1.800 Kg	9,5 m/min.	70%	Not included	1098371
844 C Z16 115V	X	-	-	1.800 Kg	9,5 m/min.	Continuous	E781	1099251

SLIDING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Max weight	Use		Control unit	Item code
					Use frequency			
740 E Z16 115V	X	-	-	500 Kg	30%		Built-in 740D	1097801
741 E Z16 115V	X	-	-	900 Kg	40%		Built-in 740D	1097811
740 C 115V	X	-	-	500 Kg	56 cycles/h		Built-in E781S LC	109601
741 C 115V	X	-	-	900 Kg	56 cycles/h		Built-in E781S LC	109603

AUTOMATIC BARRIERS

Model	Power Supply Voltage 115V	UL/CSA Certified	Use frequency	Control unit	Item code
B614 RAL 9010	X	X	Continuous use	Built-in E614	1046141
B680H	X	X	Continuous use	E680S	1046801

CONTROL UNITS

Model	Power Supply Voltage 115V	UL/CSA Certified	Item code
780D	x		63000711
740D	x		2022691
624BLD	x		20227125
624BLD		x	63000395
E034	x		102012

115V and WINTER

SLIDING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Use		Control unit	Item code
				Single-leaf max. width	Use frequency (cycles/hour)		
400 CBAC It.1 220V UL/CSA	-	X	-	2.2 m	70	Not included	1042011
400 CBAC It.1,5 LN 220V UL/CSA	-	X	-	2.2 m	50	Not included	1042021
400 CBAC It.1,5 LN 115V UL/CSA	X	X	-	2.2 m	50	Not included	10420212
400 CBAC It.1,5 220V UL/CSA	-	X	-	2.2 m	70	Not included	1042071
400 CBAC It.1,5 115V UL/CSA	X	X	-	2.2 m	50	Not included	10420712
400 CBAC It.1 220V	-	-	X	2.2 m	70	Not included	10420177
400 CBAC It.1 220V UL/CSA	-	X	X	2.2 m	70	Not included	104201177
400 CBAC It.1 115V UL/CSA	X	X	X	2.2 m	70	Not included	1042011277
400 CBAC It.1,5 LN 220V	-	-	X	2.2 m	50	Not included	10420277
400 CBAC It.1,5 LN 220V UL/CSA	-	X	X	2.2 m	50	Not included	104202177
400 CBAC It.1,5 LN 115V UL/CSA	X	X	X	2.2 m	50	Not included	1042021277
400 CBAC It.1,5 220V UL/CSA	-	X	X	2.2 m	50	Not included	104207177
400 CBAC It.1,5 115V UL/CSA	X	X	X	2.2 m	50	Not included	1042071277
400 SB It.1 220V	-	-	X	4 m	70	Not included	10420677

SWING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Use		Control unit	Item code
				Single-leaf max. width	Use frequency (cycles/hour)		
422 CBAC It.1 220V UL/CSA	-	X	-	1.8 m	55	Not included	1042001
422 CBAC It.1 115V UL/CSA	X	X	-	1.8 m	56	Not included	10420012
422 CBACS It.0,75 220V	-	-	X	1.8 m	55	Not included	10420977
422 CBAC It.1 220V	-	-	X	1.8 m	55	Not included	10420077
422 CBAC It.1 220V UL/CSA	-	X	X	1.8 m	55	Not included	104200177
422 CBAC It.1 115V UL/CSA	X	X	X	1.8 m	55	Not included	1042001277

SWING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Use		Control unit	Item code
				Single-leaf max. width	Use frequency (cycles/hour)		
402 CBC It.1 220V UL/USA	-	X	-	1.8 m	55	Not included	1044681
402 CBC It.1 115V UL/USA	X	X	-	1.8 m	55	Not included	1044682
402 CBC It.1 220V UL/USA	-	X	X	1.8 m	55	Not included	104468177
402 CBC It.1 115V UL/USA	X	X	X	1.8 m	56	Not included	104468277

SWING GATE OPERATORS: SPECIAL VERSIONS

Model	Power Supply Voltage 115V	UL/CSA Certified	Winter oil	Use		Control unit	Item code
				Single-leaf max. width	Use frequency (cycles/hour)		
412 115V RH W/O CARTER	X	-	-	1.8 m	18	Not included	1044751
412 115V LH W/O CARTER	X	-	-	1.8 m	18	Not included	1044761

ELECTRONIC CONTROL UNITS

Enclosures



Mod. L

TECHNICAL SPECIFICATIONS

Model	Enclosure Mod.L
Protection class	IP55
Cover closing	Triangular key lock as standard Key lock with coded key (optional)
Dimensions (LxDxH)	213 x 118 x 270 mm

Model	Item code
Enclosure mod. L for electronic control units	720118



Mod. E

TECHNICAL SPECIFICATIONS

Model	Enclosure Mod.E
Protection class	IP55
Cover closing	With 4 self-tapping screws
Dimensions (LxDxH)	204 x 85 x 265 mm

Model	Item code
Enclosure mod. E for electronic control units	720119



Mod. LM

TECHNICAL SPECIFICATIONS

Model	Enclosure Mod.LM
Protection class	IP55
Cover closing	Triangular key lock as standard Key lock with coded key (optional)
Dimensions (LxDxH)	246 x 142 x 353 mm

Model	Item code
Enclosure mod. LM for electronic control units	720309

ACCESSORIES



Release lock with key
for mod. L and LM

712805

Board table

TYPE OF APPLICATION		SWINGING	
Electronic control unit	E045S	E145S	E034
Electric motor	230V~	230V~	24V ---
Programming	Via display	Via LCD display or with PC/MAC	Via display
“Automatic-semi-automatic” operating logics	YES	YES	YES
“Dead man” operating logics	YES	YES	YES
“Customizable” operating logics	NO	YES	YES
Opening and closing safety devices	YES	YES	YES
Operating logic of safety devices	YES	YES	YES
Free leaf / partial opening	YES	YES	YES
Electric lock 12V~ (opening and/or closing)	YES	YES	YES
Electric lock 12V --- (opening and/or closing)	NO	YES	YES (24V ---)
Indicator Light	YES	YES	YES
Courtesy light or timed contact	NO	YES	YES
Opening and closing limit switch	NO	YES	NO
Timed deceleration	YES	YES	NO
Electronic obstacle detection	YES (with SAFEcoder)	YES (with SAFEcoder)	YES
Deceleration with gate position "reading"	YES (with SAFEcoder)	YES (with SAFEcoder)	YES
Possibility to connect to external timer	YES	YES	YES
Possibility of closing leaf delay	YES	YES	YES
Possibility of opening leaf delay	YES	YES	YES
Torque adjustment (separate for each motor)	YES	YES	YES
Fail Safe (automatic photocell test)	YES	YES	YES
Input status signalling	Led/Display/Simply Connect	Led /Display/Simply Connect	Led /Display/Simply Connect
Diagnostics	YES	YES (advanced)	YES
Opening and closing position learning cycle	YES	YES	YES
Operator Tests	YES	YES	YES
Pre-flashing (5 s)	YES	YES (adjustable)	YES
Cycle counting	NO	YES	YES
Service request	NO	YES	YES
BUS 2easy	YES	YES	YES
OmniDEC (XF - 3PIN)	YES	YES	YES
FDS (XF FDS - 3PIN)	YES	YES	YES
FDS Programming through Simply Connect	YES	YES	YES
Connectivity input (Simply Connect)	YES	YES	YES
Programmable inputs	NO	YES (Simply Connect)	NO
Programmable outputs	YES (Simply Connect)	YES	NO
Primary/Secondary function	NO	YES	YES
Timer Programming	NO	YES	YES
YES (Simply Connect)	YES (Simply Connect)	YES (Simply Connect)	YES (Simply Connect)

SLIDING			BARRIERS			BOLLARDS
740D 578D 780D	E781S LC	E721	624BLD	E614	E680S	JE275
230V~	230V~	24V 	230V~	24V 	36V 	230V~
Via display	Via display	Via display	Via display	Via display	Via LCD display	Via LCD display
YES	YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES	YES
NO	YES	NO	YES	NO	YES	YES
YES	YES	YES	Closing only	Closing only	Closing only	Closing only
YES	YES	YES	NO	NO	NO	NO
YES	YES	YES	NO	/	NO	NO
YES	YES	NO	NO	/	NO	NO
NO	NO	NO	NO	/	NO	NO
YES	YES	YES	YES	YES	YES	YES
YES	YES	YES	NO	YES	NO	NO
YES	YES	YES	YES	NO	Encoder	YES
YES	YES	YES	YES	NO	Encoder	YES
Encoder	Encoder	YES	NO	YES	Encoder	NO
Encoder	Encoder	YES	NO	YES (default)	Encoder	NO
YES	YES	YES	YES	YES	YES	YES
/	/	/	/	/	/	/
/	/	/	/	/	/	/
YES	YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES	YES
LED	LED	LED	LED	LED	LED	LED
YES	YES	YES	YES	YES	YES	YES
NO	NO	YES	NO	YES	YES	NO
YES	YES	NO	YES	YES	YES	YES
YES	YES	YES	YES (adjustable)	YES	YES (adjustable)	YES (adjustable)
NO	NO	YES	NO	YES	YES	NO
YES	YES	YES	YES	YES	YES	YES
NO	NO	YES	YES	YES	YES	YES
NO	NO	YES	NO	YES	NO	NO
NO	NO	YES	NO	YES (with adapter)	NO	NO
NO	YES	YES	NO	YES	NO	NO
NO	YES	NO	NO	NO	YES	NO
NO	NO	NO	NO	NO	NO	NO
YES	YES	YES	YES	YES	YES	YES
NO	YES	YES	YES	YES	YES	YES
NO	NO	NO	NO	NO	NO	NO
YES (Simply Connect)	YES (Simply Connect)	YES (Simply Connect)	YES (Simply Connect)	YES (Simply Connect)		

E045S

Electronic control unit



Model	Item code
E045S	790077



TECHNICAL SPECIFICATIONS

Model	E045S
Power supply voltage	220-240V~ 50/60 Hz
Max. power	4W Stand by W
Motor max power	800W
Max. accessories load	500 mA 24V --- - 500 mA BUS 2easy
Max. electric lock load	FAAC lock (12V~ - 24V ---)
Programming	LED display and buttons, via Simply Connect connectivity devices
Status signalling	Display and LED
Terminal board inputs	Open, Open pedestrian leaf, Stop (closed), BUS 2easy, Power + Earth
Terminal board outputs	Lamp, Motors, Accessories power supply 24V2 --- , Indicator light 24V --- , Electric lock power supply 12V~
Rapid connector	XF 433/868 module for OmniDEC decoding, USB-A and Simply Connect connectivity modules XMBX (GSM) or XWBL (WiFi/LAN)
Protection Fuses	1 (2.5A)
Operating ambient temperature	-20°C ÷ +55°C

Note: The E045S control unit can control one or two operators

FUNCTIONS (PROGRAMMING THROUGH DISPLAY AND BUTTONS)

Basic programming

Operating logic	Semiautomatic, Automatic, Semi-automatic step-by-step, step-by-step Auto, Auto Security stepper, Semi-automatic B, C Deadman
Pause time	Programmable (from 0 to 9 min 50 sec)
Number of motors	Selectable
Thrust power	Adjustable on 50 levels for each motor independently
Encoder use	Selectable
Leaf delay time in closing	Programmable (from 0 to 1 min 30 sec)
BUS 2-Easy device registration	Selectable
Motor Power	1 and 2 (independently)
Working time learning	Simple self-learning (max 4 min and 10 sec). Self-learning working and deceleration time of two leaves in one complete working cycle only. With SAFECoder absolute encoder, the open/closed/deceleration positions are learned

Advanced programming

Reversing stroke and ram stroke	Selectable (to facilitate the release and the electric lock)
Leaf delay in opening	Selectable
Leaf 1 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)
Leaf 2 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)

Pre-Flashing

Anti-crushing sensitivity	Programmable there is an ENCODER (10 levels)
Mechanical stop angle search	Selectable if the ENCODER is present

Files management through USB-A

Board software Upgrade	Selectable
Board configuration Upload	Selectable
Radio codes list Upload	Selectable
Configuration download from board	Selectable
Radio code download from board	Selectable

Simply Connect

The Simply Connect quick connector allows the use of connectivity devices that permit remote programming and management via web and/or App of all the automations connected to the Simply Connect cloud platform: carry out diagnosis, investigate faults, perform remote maintenance and schedule your work

IMPORTANT: the electronic board E045S, thanks to the new technologies   is only compatible with the XF 433/XF 868 receiver (provided with connector) and with XP 20B D and XP 30B photocells ("BUS" connection). For the connection of the traditional photocells, the XIB BUS interface is provided.

E145S

Electronic control unit



Model	Item code
E145S	790076



TECHNICAL SPECIFICATIONS

Model	E145S
Power supply voltage	Power switching 90V~ to 260V~ 50(60) Hz
Max. power	4W Stand by, <2W with sleep function (programmable through Simply Connect)
Motor max power	800 W
Max. accessories load	500 mA 24V - 500 mA BUS 2easy
Max. electric lock load	FAAC Lock (12V~ - 24V) - non FAAC 24V - 500 mA
Programming	LCD display and buttons, via Simply Connect connectivity devices
Status signalling	LCD Display and LED
Terminal board inputs	Open, Open pedestrian gate, Stop (closed), BUS 2easy, Opening safeties, Closing safeties, Power + Earth, Opening and closing limit switches, Safety edge input on opening, Safety edge input on closing
Terminal board outputs	Flashing light, Motors, Accessories power 24V , 2 programmable OUTPUT (default:power indicator light and fails-safe), 2 electric locks
Rapid connector	XF 433/868 module for OmniDEC decoding, connector for DECODER/MINIDEC/RP, USB-A and Simply Connect XMBX (GSM) or XWBL (WiFi/LAN) connectivity modules
Protection Fuses	1 (10A)
Operating ambient temperature	-20°C ÷ +55°C

Note: The electronic board E145S can control one or more swing operators, a sliding gear motor, or a mixture of swing-sliding systems.

FUNCTIONS (PROGRAMMING THROUGH DISPLAY AND BUTTONS)

Basic programming

Type of motors	Selectable (swing, sliding, mixed swing – sliding installation)
Operating logic	Semi-automatic, Semi-automatic step-by-step, Automatic safety, Automatic with pause reversal, Automatic step-by-step, Automatic safety step-by-step, Automatic, Automatic 1, Automatic with timer function, Semi-automatic B, Mixed (AP with pulse/CH with man present), Man Present C
Pause time	Independently programmable after total or partial opening (from 0 to 9 min 50 sec)
Number of motors	Selectable
Thrust power	Adjustable on 50 levels for each motor independently
Encoder use	Selectable
Limit switch	limit switch function in opening and closing, selectable independently
Leaf delay time in closing	Programmable (from 0 to 1 min 30 sec)
BUS 2-Easy device registration	Selectable
Motor Power	1 and 2 (independently)
Working time learning	Simple self-learning (max 4 min and 10 sec). Self-learning of working and deceleration time of the two leaves thanks to a single complete work cycle) The SAFECoder absolute encoder learns the open/closed/slowdown positions of the gate

Advanced programming

Maximum power at initial thrust	Selectable
Reverse stroke and ram stroke	Independently selectable (facilitating the coupling and uncoupling of the electric lock)
Leaf delay in opening	Selectable
Leaf 1 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)
Leaf 2 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)
Storable codes	Number of radio codes programmed on OMINIDEC through XF Module display

Pre-Flashing

Photocell in closing	Selectable Function
ADMAP Function	Selectable
Anti-crushing sensitivity	Programmable there is an ENCODER (10 levels)
Mechanical stop angle search	Selectable if the ENCODER is present
Additional work time	Selectable (if ENCODERS or limit switches are not present)
OUT 1 and OUT2 programming	Independently selectable (17 statuses each)
Service request	Selectable (if the programmed number of cycles is reached, the system activates an 8 sec pre-flashing before any movement)
Cycle count	Selectable (upgrade of a "countdown" - max setting 99,000 cycles)

File management through USB-A

Board software Upgrade	Selectable
Board configuration Upload	Selectable
Toard configuration Upload	Selectable
Radio codes list Upload	Selectable
Board configuration download	Selectable
Board timer download	Selectable
Board radio code download	Selectable

Simply Connect

The Simply Connect quick connector allows the use of connectivity devices that permit remote programming and management via web and/or App of all the automations connected to the Simply Connect cloud platform: carry out diagnosis, investigate faults, perform remote maintenance and schedule your work

E045S LC

Low-consumption control unit

NEW



Model	Item code
E045S LC	790079



TECHNICAL SPECIFICATIONS

Model	E045S LC
Power supply voltage	220V~ 240V~ @50/60 Hz
Maximum board Power	800 W
Max. motor load	700 W
Power with automation stationary and maximum accessories load	21.6 W
Standby power (low consumption LC)	≤ 0.5 W
Standby power (low consumption LC) with Simply Connect	≤ 2 W
Max. accessories load	24V  500 mA BUS 2easy 250 mA
Max. flashing light load	230 V ~ 60 W max
Ambient operating temperature	-20°C ÷ +65°C
Protective fuse	F 5 A ~ 250 V - T0.8 ~ A 250 V
Operating ambient temperature	-20°C ÷ +65°C

Note: The E045S LC control unit can control one or two operators

FUNCTIONS (PROGRAMMING THROUGH DISPLAY AND BUTTONS)

Basic programming

Operating logic	Semiautomatic, Automatic, Semi-automatic step-by-step, step-by-step Auto, Auto Security stepper, Semi-automatic B, C Deadman
Pause time	Programmable (from 0 to 9 min 50 sec)
Number of motors	Selectable
Thrust power	Adjustable on 50 levels for each motor independently
Encoder use	Selectable
Leaf delay time in closing	Programmable (from 0 to 1 min 30 sec)
BUS 2-Easy device registration	Selectable
Motor Power	1 and 2 (independently)
Working time learning	Simple self-learning (max 4 min and 10 sec). Self-learning working and deceleration time of two leaves in one complete working cycle only. With SAFECoder absolute encoder, the open/closed/deceleration positions are learned

Advanced programming

Reversing stroke and ram stroke	Selectable (to facilitate the release and the electric lock)
Leaf delay in opening	Selectable
Leaf 1 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)
Leaf 2 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)

Pre-Flashing

Anti-crushing sensitivity	Programmable there is an ENCODER (10 levels)
Mechanical stop angle search	Selectable if the ENCODER is present
Board software upgrade	XUSB o Simply Connect

Simply Connect

The Simply Connect quick connector allows the use of connectivity devices that permit remote programming and management via web and/or App of all the automations connected to the Simply Connect cloud platform: carry out diagnosis, investigate faults, perform remote maintenance and schedule your work

IMPORTANT: the electronic board E045S LC, thanks to the new technologies   is only compatible with the XF 433/XF 868 receiver (provided with connector) and with XP 20B D and XP 30B photocells ("BUS" connection). For the connection of the traditional photocells, the XIB BUS interface is provided.

E145S LC

Low-consumption control unit

NEW



Model	Item code
E145S LC	790306



TECHNICAL SPECIFICATIONS

Model	E145S LC
Power supply voltage	220V~ 240V~ @50/60 Hz
Maximum board Power	900 W
Max. motor load	800 W
Power with automation stationary and maximum accessories load	14.6 W
Standby power (low consumption LC)	≤ 0.5 W
Standby power (low consumption LC) with Simply Connect	≤ 2 W
Max. accessories load	24V  500 mA BUS 2easy 250 mA
Max. flashing light load	60 W max
Ambient operating temperature	-20°C ÷ +65°C
Protective fuse	F 10 A
Operating ambient temperature	-20°C ÷ +65°C

Note: The electronic board E145S LC can control one or more swing operators, a sliding gear motor, or a mixture of swing-sliding systems.

FUNCTIONS (PROGRAMMING THROUGH DISPLAY AND BUTTONS)

Basic programming

Type of motors	Selectable (swing, sliding, mixed swing – sliding installation)
Operating logic	Semi-automatic, Semi-automatic step-by-step, Automatic safety, Automatic with pause reversal, Automatic step-by-step, Automatic safety step-by-step, Automatic, Automatic 1, Automatic with timer function, Semi-automatic B, Mixed (AP with pulse/CH with man present), Man Present C
Pause time	Independently programmable after total or partial opening (from 0 to 9 min 50 sec)
Number of motors	Selectable
Thrust power	Adjustable on 50 levels for each motor independently
Encoder use	Selectable
Limit switch	limit switch function in opening and closing, selectable independently
Leaf delay time in closing	Programmable (from 0 to 1 min 30 sec)
BUS 2-Easy device registration	Selectable
Motor Power	1 and 2 (independently)
Working time learning	Simple self-learning (max 4 min and 10 sec). Self-learning of working and deceleration time of the two leaves thanks to a single complete work cycle) The SAFECoder absolute encoder learns the open/closed/slowdown positions of the gate

Advanced programming

Maximum power at initial thrust	Selectable
Reverse stroke and ram stroke	Independently selectable (facilitating the coupling and uncoupling of the electric lock)
Leaf delay in opening	Selectable
Leaf 1 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)
Leaf 2 deceleration	Programmable, percentage of the total stroke (from 0% to 99%)
Storable codes	Number of radio codes programmed on OMINIDEC through XF Module display

Pre-Flashing

Photocell in closing	Selectable Function
ADMAP Function	Selectable
Anti-crushing sensitivity	Programmable there is an ENCODER (10 levels)
Mechanical stop angle search	Selectable if the ENCODER is present
Additional work time	Selectable (if ENCODERS or limit switches are not present)
OUT 1 and OUT2 programming	Independently selectable (17 statuses each)
Service request	Selectable (if the programmed number of cycles is reached, the system activates an 8 sec pre-flashing before any movement)
Cycle count	Selectable (upgrade of a "countdown" - max setting 99,000 cycles)
Board software upgrade	XUSB o Simply Connect

Simply Connect

The Simply Connect quick connector allows the use of connectivity devices that permit remote programming and management via web and/or App of all the automations connected to the Simply Connect cloud platform: carry out diagnosis, investigate faults, perform remote maintenance and schedule your work

E034

Electronic control unit



Model	Item code
E034	102011



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	E034
Power supply voltage	220-240V~ 50/60 Hz
Max. power	350 W
Motor max power	170 W x 2
Max. accessories load	500 mA - 300 mA BUS 2easy
Programming	Programming via buttons
Operating logic	A, E, AP, EP, A1, B, C
Programmable functions	(*) Logic (A, E, AP, EP, A1, B, C)*, Speed (high/slow), pause time, 2nd leaf closing delay
Work time (time-out)	5 minutes (fixed)
Pause time	Varies according to learning (max. 10 min.)
Terminal board inputs	Open A, Open B, Stop, BUS (I/O)
Terminal board outputs	Motors, Flashing lights, Accessories power, electric lock, Contact service light (90 sec fix)
Rapid connector	Power supply, XF 433 or XF 868 Module
Integrated radio coding	XF FDS/ XF, DS, SLH, RC, LC (max 250 canali)
Protection Fuses	F1 = self-resetting - F2 = T2A-250V~
Operating ambient temperature	-20°C ÷ +65°C

* Motor models (392 C, S418, 413, 415, 770N, S2500I)

E124S

Electronic control unit



Model	Item code
E124S	790305



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	E124S
Power supply voltage	220-240V~ 50/60 Hz
Max. power	4 W Stand-by - approx. 400 W max W
Motor max power	7 A
Max. accessories load	500 mA 24V --- - 500 mA BUS 2easy
Accessories power supply	24V ---
Programming	No. 3 buttons (+, -, F) and LCD display or Simply Connect devices
Operating logic	Automatic (A), Semi-automatic (E), Automatic 1 (A1), Automatic step-by-step (AP), Man present (C), Automatic safety (S), Step-by-step safety (SP), Semi-automatic step-by-step (EP), Semi-automatic B (B), Mixed logic (BC), Custom
Programmable functions	(*) Logic, pause time A, pause time B, thrust, speed, deceleration spaces, leaf delay, wind resistant, reverse-stroke, soft-touch, stroke at opening and closing, initial thrust, deceleration speed, LED, failsafe, programming of 2 Easy BUS devices, service request, power-safe, battery charger timer function, battery operation, clock, time-out, pre-flashing time, motor type, encoder sensitivity
Work time	Programmable (from 0 to 10 min)
Pause time	Programmable (from 0 to 10 min)
Thrust power	Programmable on 50 levels
Speed adjustment	Programmable on 10 levels
Terminal board inputs	BUS 2easy, Fully programmable inputs via Simply Connect devices (open A, open B, close, priority open, priority close, emergency close, emergency open, stop, safety open, safety close), Inputs for 4 limit switches (open, close, motor 1/motor 2), connection inputs 2 motors, encoders
Terminal board outputs	2 programmable multifunction outputs
Rapid connector	FDS TECHNOLOGY (XF 433-868MHZ), OmniDEC (XF433 or XF868), 5-pin board plug for MINIDEC, DECODER, RP/RP2 receiver
Protection Fuses	Self-resetting
Operating ambient temperature	-20°C ÷ +55°C
Simply Connect	The Simply Connect quick connector allows the use of connectivity devices that allow the remote programming and management via web and/or app of all the automations connected to the Simply Connect cloud platform: diagnosis, fault check, remote intervention and organisation of your activity

740D

Electronic control unit



Watch the video-tutorial "740D
Electronic control unit"
vimeo.com/faacgroup/740d-en

Model	Item code
740D	202269



TECHNICAL SPECIFICATIONS

Model	740D
Power supply voltage	220-240V~ 50/60 Hz
Max. power	10 W
Motor max power	1.000 W
Max. accessories load	0.5 A
Programming	3 keys (+, -, F) and display, "basic" and "advanced" mode
Operating logic	Automatic/"Step by step" automatic/Semi-automatic/Safety/Semi-automatic B/ Manned C/ Step by step semi-automatic /Mixed logic B+C
Programmable functions	Function logics, Pause time, Thrust force, Gate direction, Torque at initial thrust, Brake, Failsafe, Pre-flashing, Indicator light/Timed output, Logic for safety devices at opening and Closing, Encoder (optional) for anti-crushing electronic safety device, Deceleration control and partial opening, Decelerations, Partial opening time, Work time, Service request, Cycle count
Work time	Programmable (0 to 4 min.)
Pause time	Programmable (0 to 4 min.)
Thrust power	Adjustable on 50 levels
Terminal board inputs	Open, Partial Open, Opening safety device, Closing safety device, Stop, Edge, Power supply + earth
Terminal board outputs	Flashing light, Motor, Accessories power supply 24V  - Indicator light 24V  / Timed output-Failsafe
Rapid connector	5-pin fitting for Minidec cards, Decoder or RP receivers,Opening and closing limit switches, Encoder (optional)
Protection Fuses	2
Operating ambient temperature	-20°C ÷ +55°C

E721

Electronic control unit



Watch the video-tutorial "E721
Electronic control unit"
vimeo.com/faacgroup/e721-en



Model	Item code
E721 control unit (incorporated in the operator)	63002485



TECHNICAL SPECIFICATIONS

Model	E721
Power supply voltage	220-240V~ 50/60 Hz
Max. power	10 W
Motor max power	220 W (C720) - 300W (C721)
Max. accessories load	500 mA
Accessories power supply	24V
Programming	3 keys (+, -, F) and LCD display
Operating logic	Automatic (A), Semiautomatic (E), Automatic Timer (At), Automatic Safety (SA), Parking automatic (AP), Dead man, Automatic safety (S), Safety Step by Step (SP), Semiautomatic Step by Step (EP), Semiautomatic (B)/ Mixed logic ©
Programmable functions	Logic, Pause time A, Pause time B, Thrust, Opening speed, Closing speed, Deceleration spaces, Pre-flashing, Opening safety devices logic, Closing safety devices logic, Obstacle detection, Partial opening, Primary/Secondary
Work time	Programmable (from 0 to 9 min and 50 sec)
Pause time	Programmable (from 0 to 9 min and 50 sec)
Thrust power	Programmable on 50 levels
Speed adjustment	Programmable on 10 levels
Terminal board inputs	BUS 2 Easy 5 inputs (open A, open B, close, stop, safety device at opening, safety device at closure)
Terminal board outputs	1 programmable output (failsafe, alarms, LED, courtesy light, can be activated with radio channel 2), flashing light
Rapid connector	OmniDEC (XF 433 or XF 868)
Protection Fuses	Self-resetting
Operating ambient temperature	-20°C ÷ +55°C

578D

Electronic control unit



Model	Item code
578 D electronic control unit (remote installation)	790922



TECHNICAL SPECIFICATIONS

Model	578D
Type of power supply	Integrated
Power supply voltage	220-240V~ 50/60 Hz
Max. power	10 W
Motor max power	1.000 W
Max. accessories load	0.5 A
Programming	3 keys (+, -, F) and display, "basic" and "advanced" mode
Status signalling	Via display
Operating logic	Automatic, Automatic Step by Step, Semi-automatic, Semi-automatic Step by Step, Safety, Semi-automatic B, "Dead man" C/ B/C mixed logic
Programmable functions	Function logics, Pause time, Thrust power, Opening/Closing direction, Torque at initial thrust, Brake, Failsafe, Pre-flashing, Indicator light/Timed output / Electric lock at opening and closing, Logic for safety devices at opening and closing, Encoder / Anti-crushing sensitivity, Decelerations, Partial opening time, Work time, Service request, Cycle count
Work time	Programmable (from 0 to 4 min)
Pause time	Programmable (from 0 to 4 min)
Thrust power	Adjustable on 50 levels
Terminal board inputs	Open, Partial open, Safety in opening, safety in closing, Stop, Edge, Power + Earth, Opening and closing limit switches, Encoder
Terminal board outputs	Flashing light, Motors, Power accessories 24V  , Indicator Light 24V  , Timed output, Electric lock control, Traffic light, Failsafe
Rapid connector	5-pin board insertion, MINIDEK, Decoder or RP receivers
Protection Fuses	2
Operating ambient temperature	-20°C ÷ +55°C
Enclosures compatibility	mod. E - L - LM

E781S LC

Low-consumption control unit

NEW



Model	Item code
E781S LC control unit (for 740 C and 741 C gearmotors)	63003530
E781S LC control unit (for 746 C and 844 C gearmotors)	63003478



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	E781S LC
Power supply voltage	220 - 240 V~ @50/60 Hz
Max. motor load	680 W
Power with automation stationary and maximum accessories load	≤ 23.5 W
Standby power (low consumption LC)	≤ 0.5 W
Standby power (low consumption LC) with Simply Connect	≤ 2 W
Max. accessories load	24 V " 500 mA at 55°C 24 V " 400 mA at 65°C* Bus 2easy 300 mA
Max. flashing light load	30 W max
Fuses	F 5 A (230 V~) T 0.8A F 2A
Ambient operating temperature*	-20°C - +65°C

* Check the maximum ambient operating temperature allowed for the gearmotor (see the instructions for the gearmotor on which the board is installed).

780D

Electronic control unit



Model	Item code
780 D Control unit (incorporated in automation)	63000710



TECHNICAL SPECIFICATIONS

Model	780D
Type of power supply	Separated (connection to faston on the printed circuit)
Power supply voltage	220-240V~ 50/60 Hz
Max. power	10 W
Motor max power	1.000 W
Max. accessories load	0.5 A
Programming	3 keys (+, -, F) and display, "basic" and "advanced" mode
Status signalling	Via display
Operating logic	Automatic, Automatic Step by Step, Semi-automatic, Semi-automatic Step by Step, Safety, Semi-automatic B, "Dead man" C/ B/C mixed logic
Programmable functions	Function logics, Pause time, Thrust power, Opening/Closing direction, Torque at initial thrust, Brake, Failsafe, Pre-flashing, Indicator light/Timed output / Electric lock at opening and closing, Logic for safety devices at opening and closing, Encoder / Anti-crushing sensitivity, Decelerations, Partial opening time, Work time, Service request, Cycle count
Work time	Programmable (from 0 to 4 min)
Pause time	Programmable (from 0 to 4 min)
Thrust power	Adjustable on 50 levels
Terminal board inputs	Open, Partial open, Safety in opening, Safety in closing, Stop, Edge, Power + Earth, Opening and closing limit switches, motor condenser
Terminal board outputs	Flashing light, Motors, Power accessories 24V  , Indicator Light 24V  , Timed output, Electric lock control, Traffic light, Failsafe
Rapid connector	5-pin board insertion, MINIDEK, Decoder or RP receivers
Protection Fuses	2
Operating ambient temperature	-20°C ÷ +55°C

E844 3PH

Electronic control unit



Model	Item code
E844 3PH electronic board	202073



TECHNICAL SPECIFICATIONS

Model	E844 3PH
Power supply voltage	230V~ 3PH (+6% -10%) - 400V~ 3PH+N (+6% -10%) 50(60) Hz
Max. power	3 W
Motor max power	1500 W
Max. accessories load	24 V  500 mA Bus 2easy 500 mA
Max. flashing light load	230 V ~ 60W max
Operating ambient temperature	-20 °C ÷ +55 °C
Stopping space with 844 R 3PH	8 cm
Stopping space with 844 MC 3PH	8 cm
Programmable functions	Logics (E, EP,A , AP, S, b, C), Pause time, Partial pause time, Failsafe, Soft start, Pre-limit switch deceleration, Encoder obstacle detection sensitivity, Partial opening width, Output1 configuration, Output2 configuration, Pre-flashing.
Terminal board inputs	Open, Partial Open, Safeties in opening, Safeties in closing, Limit switch, Priority during opening, Priority during closing.
Terminal board outputs	Flashing light, motor, accessories

E850S

Electronic control unit



Model	Item code
E850S electronic board	63003207



TECHNICAL SPECIFICATIONS

Model	E850S
Power supply voltage	220-240V~ 50/60 Hz
Max. power	18 W
Motor max power	1.5 KW
Max. accessories load	500 mA
Accessories power supply	24V
Programming	N° 3 buttons (P1, P2, ENTER) and display
Operating logic	Automatic, Semi-automatic, Automatic Step-by-Step, Semi-automatic Step by Step, Dead-man, Condominium
Programmable functions	Logic, Pause time, Partial opening time, Pre-flashing, Closing photocells, Working time, Fail-Safe output, Service request.
Work time	Programmable
Pause time	Programmable
Terminal board inputs	Open, OpenB - Close, Safety in closing, Safety in opening, Stop, SAFE, 230V~ Power Supply + Earth
Terminal board outputs	Flashing lamp, Electrobrake, 24V Power supply, Fail-Safe, Warning light / Status Output
Rapid connector	Opening and closing limit switch, Opening and closing deceleration
Protection Fuses	F1=F 10A-250V~ F2=T 0,5A-250V~
Operating ambient temperature	-20°C ÷ +55°C

E600 - E700 HS - E1000

Electronic control units



Model	Item code
E600 electronic control unit (incorporated in D600 automation)	2024015
E700 HS electronic control unit (incorporated in D700 HS automation)	63002425
E1000 control unit (incorporated in D1000 automation)	2024025



TECHNICAL SPECIFICATIONS

Model	E600	E700 HS	E1000
Power supply voltage	220-240V~ 50/60 Hz		
Max. accessories load	200 mA		
Accessories power supply	24V ---		
Operating logic	Automatic, Semiautomatic		
Courtesy light timing	2 min		
Thrust power	Automatic		Automatic/Trimmer
Terminal board inputs	Open, Stop, Safety devices, Failsafe, Flashing light 24V ---		
Rapid connector	for receiver control units XF 433/XF 868, Battery module		
Operating ambient temperature	-20°C ÷ +55°C		

540BPR

Electronic control unit



Model	Item code
540BPR electronic control unit (incorporated)	2022805



TECHNICAL SPECIFICATIONS

Model	540BPR
Power supply voltage	220-240V~ 50/60 Hz
Max. power	4 W
Motor max power	800 W
Max. accessories load	200 mA
Operating logic	B/C, B, C, EP, AP, P default = B/C
Programmable functions	Logics, Working time, Pause time
Work time (time-out)	Self-learning (0-10 min with steps of 2.5 sec) - Default = 10 min
Pause time	Self-learning (0-5 min with steps of 1.5 sec) - Default = 30 sec
Terminal board inputs	Opening, Closing, Stop, Safety in closing, Limit switch, Power supply
Terminal board outputs	Motor, Accessories power supply 24V 
Rapid connector	Single/two channels control unit receiver, Decoding control units
Protection Fuses	F1= 6,3 A - 250V~ - F2= self-resetting
Operating ambient temperature	-20°C ÷ +55°C

200MPS

Electronic control unit



Model	Item code
200MPS electronic control unit	790905



TECHNICAL SPECIFICATIONS

Model	200MPS
Power supply voltage	220-240V~ 50/60 Hz
Motor max power	800 W
Max. accessories load	200 mA
Accessories power supply	24V 
Operating logic	A, and P
Pause time	Adjustable from 0 to 60 sec
Terminal board inputs	Open, Close, Stop, Safety in closing, Power supply
Terminal board outputs	Motor, flashing light
Protection Fuses	F1 = 10 A - 250V~ - F3 = 0.5 A - 250V~
Operating ambient temperature	-20°C ÷ +55°C
Protection class	IP55

E550S LC

Low-consumption control unit

NEW



Model	Item code
E550S LC low-consumption control unit with jumpered connector	63003556



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	E550S LC
Power supply voltage	220-240V~ 50/60 Hz
Max. power	18 W
Motor max power	800 W
Incorporated courtesy lamp max power	25 W
External courtesy light max power	250 W
Max. accessories load	500 mA (includes power for the secondary board LED, approximately 100 mA) - Bus 2Easy 250 mA
Accessories power supply	24V ---
Terminal boards	Removable
Terminal board inputs	Open, Encoder, Closing and opening safety devices, Opening limit switches, Closing limit switches, BUS 2easy, STOP
Terminal board outputs	Motor, 230VAC-60W flashing lamp, Failsafe, 1 programmable OUT E, accessory supply 24V ---
Rapid connector	5-pin board insertion, MINIDEC, Decoder or RP receiver, RP/RP2
Protection Fuses	Network circuit / accessories
Operating ambient temperature	-20°C ÷ +55°C

E614

Electronic control unit



Model	Item code
E614 Control unit (built-in)	63001034




TECHNICAL SPECIFICATIONS

Model	E614
Power supply voltage	220-240V~ 50/60 Hz
Motor max power	150 W
Max. accessories load	500 mA
Accessories power supply	24V 
Programming	LED display and buttons
Operating logic	EP - A - AP - B - BC - C - P
Programmable functions	Logic, Pause time, Opening/Closing power, Opening/Closing speed, Work time, Cycle counter for service, service request, warning light output, Failsafe output, Status output, Beam LED lighting output , traffic light head output, battery operation, pre-flashing time, Stop, exits delay , Primary-Secondary
Work time	Programmable (from 0 to 9,5 min)
Pause time	Programmable (from 0 to 9,5 min)
Thrust power	Programmable on 50 levels
Speed adjustment	Programmable on 10 levels
Terminal board inputs	Loop1*, Loop2*, Open, Close, Stop, Emergency, Battery, BUS 2easy, Power supply
Terminal board outputs	24V Flashing-lamp, Motor, Accessories supply 24V  , 4 programmable outputs
Rapid connector	XF433/868 Module for OmniDEC decoding, USB, Traffic light indicator head, Beam LED lighting
Protection Fuses	1 (2,5A) + self-resetting fuses
Operating ambient temperature	-20°C ÷ +55°C

615BPR

Electronic control unit

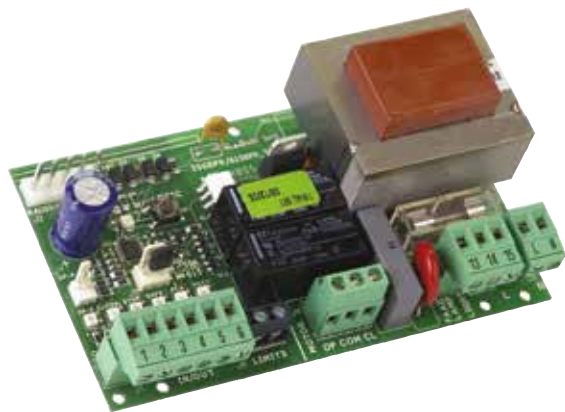

Model	Item code
615BPR electronic control unit (incorporated)	790281



TECHNICAL SPECIFICATIONS

Model	615BPR
Power supply voltage	220-240V~ 50/60 Hz
Max. power	4 W
Motor max power	800 W
Max. accessories load	250 mA
Operating logic	B/C - B - C - EP - AP - P - Default = EP
Programmable functions	Operation for barrier or up-and-over doors, Logics, Working time, Pause time
Work time (time-out)	Self-learning (0-10 min with steps of 2.5 sec) - Default = 10 min
Pause time	Self-learning (0-5 min with steps of 1.5 sec) - Default = 30 sec
Terminal board inputs	Open, Close, Stop, Closing safety devices, Limit switches, Power supply
Terminal board outputs	Motor, Flashing lamp, Courtesy light and accessories power supply
Protection Fuses	F1 = 6.3 A - 250 V~ - F2 = self-resetting
Operating ambient temperature	-20°C ÷ +55°C

624BLD

Electronic control unit



Model	Item code
624BLD electronic control unit (incorporated in automation)	2022715

- It can be used together with all FAAC 620 barrier models



TECHNICAL SPECIFICATIONS

Model	624BLD
Power supply voltage	220-240V~ 50/60 Hz
Max. power	7 W
Motor max power	300 W
Max. accessories load	500 mA
Accessories power supply	24V 
Programming	3 keys (+, -, F) and display
Operating logic	Automatic, Automatic 1, Semi-automatic, Parking, Parking-Automatic, Condominium, Condominium-Automatic, FAAC-CITY, Manned, Remote, Custom
Programmable functions	Logic, Pause time, Thrust, Loop 1 and 2, Torque at initial thrust, Pre-flashing, Slow Closing, Deceleration time, Work time, LED output, Failsafe output, Status output, BUS output, Service Request
Work time	Programmable (from 0 to 4 min)
Pause time	Programmable (from 0 to 4 min)
Thrust power	Programmable on 50 levels
Terminal board inputs	Loop 1, Loop 2, Open, Close, Safety in closing, Stop, Emergency, 230V~ Power supply + Earth
Terminal board outputs	Flashing lamp, fan, motor, 24V  power supply, fail-safe, status output, 24 Vdc indicator light, BUS, 4 programmable outputs in 18 different functions
Rapid connector	5-pin fitting for MINIDEC, DECODER or RP/RP2 receiver, Opening and closing limit switches, motor capacitor, beam release sensor
Integrated detector 2 independent channels	Real time self-calibration, sensitivity independent from loop geometry, loop operating frequency adjustment, message of "loop engaged" with LED display, loop status can be directed to programmable outputs, adjustment time over 2 levels.
Protection Fuses	F1=F 5A-250V~ F2=T 0.8A-250V~
Operating ambient temperature	-20°C ÷ +55°C

E680S

Electronic control unit



Model	Item code
E680S	63003452



TECHNICAL SPECIFICATIONS

Model	E680S
Power supply voltage	220-240V~ 50/60 Hz
standby power	7 W
Motor max power	240 W
Max. accessories load	800 mA
Accessories power supply	24V ---
Programming	3 keys (+, -, F) and display, 1 automatic set-up key
Operating logic	Automatic, Automatic 1, Semi-automatic, Parking, Parking-Automatic, Condominium, Condominium-Automatic, Manned, Remote, Custom
Programmable functions	Logic, Pause time, Opening/Closing power, Opening/Closing speed, Loop 1 and 2, Pre-flashing, Work time, Obstacle detection sensitivity, Cycle counter for service, LED output, Failsafe output, Status output, Service request, Beam LED lighting output
Work time	Programmable (from 0 to 4.1 min)
Pause time	Programmable (from 0 to 4.1 min)
Thrust power	Programmable on 50 levels
Speed adjustment	Programmable on 50 levels
Terminal board inputs	Loop 1, Loop 2, Open, Close, Closing safety devices, Stop, Emergency, Power supply 36V --- , Battery XBAT, BUS 2easy
Terminal board outputs	Flashing lamp 24V, Brushless motor, Accessories power supply 24V --- , 4 programmable outputs of which one with relay
Rapid connector	Encoder, Beam release sensor, Integrated flashing traffic light, USB (for updating firmware), 5-pin minidec, decoder, RP/RP2 receiver.
Integrated detector 2 independent channels	Real time self-calibration, Sensitivity independent of the loop geometry, Loop work frequency adjustment, Occupied loop message with LED display, Loop status can be directed on programmable outputs
Protection Fuses	4 self-resetting
Operating ambient temperature	-20°C ÷ +55°C

E4000I

Electronic control unit



Model	Item code
E4000I control unit (incorporated in the operator)	63003390
C4000I power supply board (incorporated in the operator)	63003391



TECHNICAL SPECIFICATIONS

Model	E4000I
Power supply voltage	220-240V~ 50/60 Hz to board switching power supply unit
Motor max power	150 W
Accessories power supply	1A
Max. accessories load	24V
Programming	3 keys (+, -, F) and LCD display
Operating logic	Automatic (A), Semi-automatic (E), Semi-automatic (B), Man present (C)
Programmable functions	Logics, Pause time A, Pause time B, Force, Opening speed, Closing speed, Opening slowing down space, Closing slowing down space, Slowing down speed, Opening direction, Opening safety logic, Closing safety logic, Pre-warning, Maximum force at start, Partial opening, Primary/Secondary, Forced commands (Hr), Sleep
Work time	Programmable (from 0 to 9 min and 50 sec)
Pause time	Programmable (from 0 to 9 min and 50 sec)
Thrust power	Programmable on 50 levels
Speed adjustment	Programmable on 10 levels
Terminal board inputs	BUS 2easy, 6 inputs (open A, open B, close, stop, safety opening, safety closing)
Terminal board outputs	1 programmable output (failsafe, alarms, LED, courtesy light, can be activated with radio channel 2), flashing light
Rapid connector	XBat battery power supply, XF 433/868 module for OmniDEC and Simply Connect decoding
Operating ambient temperature	-20°C ÷ +55°C

JE

Electronic control unit



Model	Item code
JE control unit	117300



TECHNICAL SPECIFICATIONS

Model	JE
Power supply voltage	230V~ (+ 6% - 10%) 50/60 Hz
Max. power	7W
Motor max power	1.200W
Accessories power supply	24V 
Max. accessories load	500mA
Operating ambient temperature	-20°C ÷ +55°C
Protection Fuses	F1 = 10A-250~ F2=T 0,8A-250~
Operating logic	Automatic, Automatic 1, Semi-automatic, Parking, Parking-Automatic, Condominium, Condominium-Automatic J Series, Manned, Remote, Custom
Work time	Programmable (from 0 to 4 min)
Pause time	Programmable (from 0 to 4 min)
Thrust power	Programmable on 50 levels
Terminal board inputs	Loop 1, Loop 2, Open, Close, Safety in closing, Stop, Emergency, 230V~ Power supply + Earth
Terminal board outputs	Flashing lamp, motor, Accessories power supply 24 VDC, Fail-Safe, Status output, 24V led lighting output, BUS
Rapid connector	Opening and closing limit switches, motor condenser
Programmable functions	Logic, Pause time, Thrust, Loop 1 and 2, Torque at initial thrust, Pre-flashing, Slow Closing, Deceleration time, Work time, LED output, Failsafe output, Status output, BUS output, Service Request
Integrated detector 2 independent channels	Real time self-calibration, sensitivity independent from loop geometry, loop operating frequency adjustment, message of "loop engaged" with LED display, loop status can be directed to programmable outputs, adjustment time over 2 levels.

SAFEcoder

Magnetic Absolute Encoder



Model	Item code
SAFEcoder BUS magnetic absolute encoder (FAAC Patent)	404040
SAFEcoder LC absolute magnetic BUS encoder low-consumption (FAAC Patent)	404047
SAFEcoder for operator 412 (FAAC Patent)	404041
LC SAFEcoder low-consumption for 412 operator(FAAC Patent)	404048
Encoder unit for 770N	404035
Encoder group L low-consumption for 770N	404046



TECHNICAL SPECIFICATIONS

Model	SAFEcoder
Power supply voltage	BUS 2easy
Protection class	IP 66
Operating ambient temperature	-20°C ÷ +55°C

Note: the SAFEcoder is only compatible with the E045S, E145S, E034 and E124S control units

XUSB

Firmware update interface



- XUSB: the new firmware update accessory
- Allowing firmware updates via USB stick, XUSB connects directly to Simply Connect's dedicated connectors, providing a useful update tool when Simply Connect is not in use and the USB port on the circuit board is missing.
- Once the firmware update is done, simply remove XUSB to use it on other compatible systems, ensuring maximum versatility.

Model	Item code
XUSB	202274



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XUSB
Power supply voltage	24V  from control unit
Absorption without USB stick	30mA @ 5V (7mA @ 24V for accessory absorption calculation)
Operating ambient temperature	-20°C ÷ +55°C
USB type	USB 2.0 FAT or FAT 32

XLC

LOW-CONSUMPTION KIT



- XLC: the new device designed to significantly reduce the power consumption of the control unit.
- In stand-by mode, power consumption is reduced to a maximum of 0.5W for non-connected systems, while with Simply Connect, the maximum consumption is only 2W, in compliance with EU Directive 2009/125/EC and EU Regulation 2023/826.
- Thanks to this device, the control unit automatically enters low-power mode after a few minutes of inactivity, and then automatically switches off when needed.
- This innovation not only actively contributes to reducing the environmental impact of our technologies, but also saves money in operating costs due to lower energy consumption.
- Compatible with E034 control unit

Model	Item code
XLC	390130



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XLC
Power supply voltage	110-240V~ 50/60 Hz
Absorbed current	0.2 W in stand by
standby power	350 W including control unit consumption
Operating ambient temperature	-20°C ÷ +65°C

ACCESSORIES FOR AUTOMATIONS

ACCESSORIES FOR AUTOMATIONS

Simply Connect interface boards

The Simply Connect devices work with a GSM mobile data network connection (XMBX4) or with a WiFi - LAN connection (XWBL) to the home/ business network.

XMBX4 and XWBL Simply Connect devices can be coupled directly to compatible automations (electronic boards).

The XMBX4 device has a GSM connection and comes with a built-in eSIM: no data SIM card needs to be purchased. Both devices are also equipped with BLE connectivity to manage automations closed to each other.

XMBX4



Model	Description	Item code
XMBX4	GSM Connectivity Module XMBX4	787510

DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XMBX4
Power supply voltage	5VDC
Absorbed current	100mA at 24V (500mA at 5V)
Connections	LTE 4G BLE (Bluetooth Low Energy 4.2) – 2.4Ghz
Installation type	with coupling to compatible board
Operating temperature	-20°C ÷ +55°C

XWBL



Model	Description	Item code
XWBL	Simply Connect WiFi/LAN/BLE device	787378

TECHNICAL SPECIFICATIONS

Model	XWBL
Power supply voltage	5VDC
Absorbed current	100mA at 24V (500mA at 5V)
Connections	WIFI 802.11 b/g/n – 2.4GHz BLE (Bluetooth Low Energy 4.2) – 2.4Ghz LAN RJ45 connector - IEEE 802.3
Installation type	with coupling to compatible board
Operating temperature	-20°C ÷ +55°C

Simply Connect interface boards

XMULTICOM is an interface board onto which an XWBL or XMBX4 connectivity device can be plugged, to achieve Simply Connect connectivity with any automation not directly compatible with XMBX4 and XWBL devices.

XRS485 is a control unit that can be used in conjunction with XMULTICOM, to control via Simply Connect FAAC automations that are not compatible with FDS radio devices.



XMULTICOM



Model	Description	Item code
XMULTICOM	XMULTICOM unit	790418

TECHNICAL SPECIFICATIONS

Model	XMULTICOM
Power supply voltage	24VAC - 24VDC
Absorbed current	150 mA
Connections	no need for XWBL or XMBX device
Removable connector	Power supply - RS485 - Inputs / Outputs
Terminal board inputs	2
Terminal board outputs	2
Rapid connector	quick coupling for XWBL or XMBX
Radio signal decoding	SLH
Installation type	on DIN bar
Protection class	IP20
Operating temperature	-20°C ÷ +55°C



XRS485



Model	Description	Item code
XRS485	XRS485 interface board	787349

TECHNICAL SPECIFICATIONS

Model	XRS485
Power supply voltage	5VDC
Absorbed current	50 mA
Connections	RS485
Installation type	with coupling to compatible board
Operating temperature	-20°C ÷ +55°C

Installation examples



FAAC Automations **COMPATIBLE** with Simply Connect

ELECTRONIC CONTROL UNITS

COMPATIBLE

WITH SIMPLY CONNECT

E034, E045S, E124, E124S, E145, E145S,
E1RD, E1SL/ E2SL, E680S, E781, E781S LC and E952




**XWBL
XMBX4**



Direct coupling of the XWBL or XMBX4 module to the circuit board

How to connect
a **Simply
Connect module**
to a compatible
**electronic
board?**

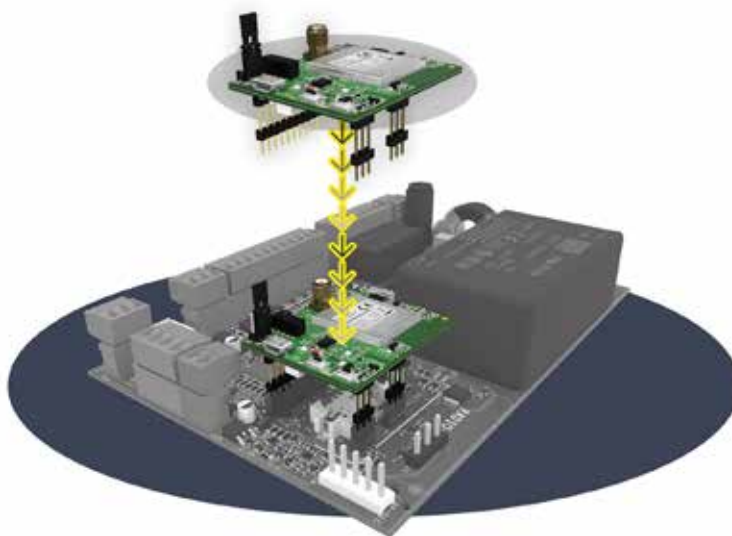



FAAC Automations NOT COMPATIBLE with Simply Connect

ELECTRONIC CONTROL UNITS NOT COMPATIBLE WITH SIMPLY CONNECT

Not included in the "Compatible electronic boards" list or another type.



**XWBL
XMBX4**



Via the XMULTICOM interface card, any automation becomes manageable with Simply Connect

XMULTICOM



To discover all the features, visit
www.faacsimplyconnect.com

The advantages of Simply Connect

FOR INSTALLERS

Programming and remote management via the web and/or app of all automations connected to the Simply Connect cloud platform: troubleshooting, fault investigation, remote maintenance and work scheduling.

FOR END USERS

Remote connection via the web and/or app with automations connected to the Simply Connect cloud platform: send commands, even with voice commands and control your automation remotely and grant or revoke access rights for other users.

433-868MHz FDS System

Use frequency 433,92 - 868,35 MHz
Type of code: FDS technology

FDS = FAAC DIGITAL SIGNATURE: Radio protocol based on frequency modulation with top performance in terms of range and battery life; radio transmission is protected with **AES-128 symmetric encryption algorithm with 128bit key**. The authenticity of the remote controls is verified by means of a chain of FAAC customized security certificates.

Advantages:

Maximum security against cloning obtained by the advanced security scheme empowered by the adoption of **Secure Vault™ (PSA™ certified Level 3)** and **TrustZone®** hardware technologies: the "state-of-the-art" to secure digital financial transactions and IoT High Security devices/networks.

Double frequency: transmitters and receivers are able to communicate at 868MHz-433MHz in time sharing, no more need to choose the working frequency in advance, thus simplifying the management of installation/maintenance activities.

Ease of registration: new simplified registration/management procedures of the radio transmitters both via SELF LEARNING and direct registration on the receiver.

SLH compatible: FDS transmitters can, in case of need, be used on existing SLH systems.

PHYGITAL solution: FDS transmitters are the first FAAC PHYGITAL trasmitters.

Thanks to the **Simply Connect integration** the complete remote management can be achieved (addition of individual or group of transmitters via Matrix-Code, possibility to remove, enable, disable transmitters and manage the operating time bands) with no need of using dedicated tools and being onsite.



XT2 FDS 433-868



XT4 FDS 433-868



Model	Decoding	Description	Colour	Item code
XT2 FDS 433-868	FDS	2 channel transmitter (multiple quantity saleable 16pcs)	Black	787017
XT4 FDS 433-868		4 channel transmitter (multiple quantity saleable 16pcs)	Black	787018



The radio signal communication emitted from the transmitter can be obtained through one of the following:



XF FDS 433-868

1) **Frequency module** (compatible with all FAAC electronic control units equipped with the decoding system FDS, recognizable by the dedicated logo)

Model	Description	Item code
XF FDS 433-868	Frequency module	787025
XF FDS 433-869 LC	Frequency module low-consumption	787860



RP FDS 433-868

2) **Rapid plug in receiver** (compatible with all FAAC electronic control units equipped with a 5-pin quick insertion connector, or external uses via connection to the accessory RP relay interface)

Model	Description	Item code
RP FDS 433-868	1 channel plug in	787021
RP FDS 433-869 LC	1 channel plug in low-consumption	787058
RP2 FDS 433-868	2 channels plug in	787022
RP2 FDS 433-869 LC	2 channels plug in low-consumption	787059



XRN 433-868

4) **External receiver** (system with integrated FDS-SLH-RC-DS decoding in dedicated enclosure for outdoor use)

Model	Description	Item code
XR2N 433-868	XR2N FDS 433-868 Mhz Receiver	787023
XR4N 433-868	XR4N FDS 433-868 Mhz Receiver	787024

TECHNICAL SPECIFICATIONS

Model	XR2N 433-868	XR4N 433-868
Power supply voltage	12 ÷ 24 V~ - 12 ÷ 24 V~	
Receiving Frequency	433.92 Mhz - 868.35 Mhz	
Absorbed current	100 mA	
Radio signal decoding	FDS-DS-SLH-RC	
Storable codes	248	248 CH 1-2 / 248 CH 3-4
Number of channels	2	4
Number of relay outputs (N.A.)	1 pulse (CH1) - 1 pulse/fixed (selectable) (CH 2)	
Contact ratings	0,5 A / 120 VA	
Protection class	IP 44	
Operating ambient temperature	-20° C ÷ +55 ° C	
Dimensions (LxDxH)	90 x 70 x 32,5 mm	

ACCESSORIES



Antenna for RP receiver / XF / XR2 / XR4 with a fixing bracket and 5m coaxial cable
412003



Relay Interface for RP receivers for wiring connections

787725



Four channels extension module

102845



FDS transmitters' bumper pack

120002



Sun visor bumper for FDS transmitters

120003



XIR Radio interface ♦

202275

NOTE

♦To ensure compatibility of D600, D700, D1000, B614 with the FDS system, to be used in combination with the RP FDS/RP2 FDS receiver.

433-868MHz FDS BD System

Use frequency 433,92 - 868,35 MHz

Type of code: FDS technology

FDS = FAAC DIGITAL SIGNATURE: Radio protocol based on frequency modulation with top performance in terms of range and battery life; radio transmission is protected with **AES-128 symmetric encryption algorithm with 128bit key**. The authenticity of the remote controls is verified by means of a chain of FAAC customized security certificates.

BD = BIDIRECTIONAL: Transmitters and receivers are "transceivers", are therefore able to exchange information with each other.

Advantages:

Maximum security against cloning obtained by the advanced security scheme empowered by the adoption of **Secure Vault™ (PSA™ certified Level 3)** and **TrustZone®** hardware technologies: the "state-of-the-art" to secure digital financial transactions and IoT High Security devices/networks.

Double frequency: transmitters and receivers are able to communicate at 868MHz-433MHz in time sharing, no more need to choose the working frequency in advance, thus simplifying the management of installation/maintenance activities.

Bidirectional: BD transmitters are able to:

- Provide feedback by the receiver of the reception of a command
- Query the status (closed/not closed) of the automation

TAG integrated: BD transmitters are equipped with an integrated TAG compatible with XTR B readers.

Ease of registration: new simplified registration/management procedures of the radio transmitters both via SELF LEARNING and direct registration on the receiver.

SLH compatible: FDS transmitters can, in case of need, be used on existing SLH systems.

PHYGITAL solution: FDS transmitters are the first FAAC PHYGITAL trasmitters.

Thanks to the **Simply Connect integration** the complete remote management can be achieved (addition of individual or group of transmitters via Matrix-Code, possibility to remove, enable, disable transmitters and manage the operating time bands) with no need of using dedicated tools and being onsite.



XT2 FDS BD 433-868



XT4 FDS BD 433-868



Model	Decoding	Description	Colour	Item code
XT2 FDS BD 433-868	FDS	2 channel transmitter (multiple quantity saleable 16pcs)	Black	787019
XT4 FDS BD 433-868		4 channel transmitter (multiple quantity saleable 16pcs)	Black	787020



The radio signal communication emitted from the transmitter can be obtained through one of the following:



XF FDS 433-868

1) **Frequency module** (compatible with all FAAC electronic control units equipped with the decoding system FDS, recognizable by the dedicated logo)

Model	Description	Item code
XF FDS 433-868	Frequency module	787025
XF FDS 433-869 LC	Frequency module low-consumption	787860



RP FDS 433-868

2) **Rapid plug in receiver** (compatible with all FAAC electronic control units equipped with a 5-pin quick insertion connector, or external uses via connection to the accessory RP relay interface)

Model	Description	Item code
RP FDS 433-868	1 channel plug in	787021
RP FDS 433-869 LC	1 channel plug in low-consumption	787058
RP2 FDS 433-868	2 channels plug in	787022
RP2 FDS 433-869 LC	2 channels plug in low-consumption	787059



XRN 433-868

4) **External receiver** (system with integrated FDS-SLH-RC-DS decoding in dedicated enclosure for outdoor use)

Model	Description	Item code
XR2N 433-868	XR2N FDS 433-868 Mhz Receiver	787023
XR4N 433-868	XR4N FDS 433-868 Mhz Receiver	787024

TECHNICAL SPECIFICATIONS

Model	XR2N 433-868	XR4N 433-868
Power supply voltage	12 ÷ 24 V~ - 12 ÷ 24 V~	
Receiving Frequency	433.92 Mhz - 868.35 Mhz	
Absorbed current	100 mA	
Radio signal decoding	FDS-DS-SLH-RC	
Storable codes	248	248 CH 1-2 / 248 CH 3-4
Number of channels	2	4
Number of relay outputs (N.A.)	1 pulse (CH1) - 1 pulse/fixed (selectable) (CH 2)	
Contact ratings	0,5 A / 120 VA	
Protection class	IP 44	
Operating ambient temperature	-20° C ÷ +55 ° C	
Dimensions (LxDxH)	90 x 70 x 32,5 mm	

ACCESSORIES



Antenna for RP receiver / XF / XR2 / XR4 with a fixing bracket and 5m coaxial cable
412003



Relay Interface for RP receivers for wiring connections
787725



Four channels extension module
102845



FDS transmitters' bumper pack
120002



Sun visor bumper for FDS transmitters
120003



XIR Radio interface ♦
202275

NOTE

♦To ensure compatibility of D600, D700, D1000, B614 with the FDS system, to be used in combination with the RP FDS/RP2 FDS receiver.

868MHz Omni System

NEW



XT02 868 MHz



XT04 868 MHz

Use frequency 868.35 MHz

Coding type: SLH, SLHP, SL, DS

Universal Compatibility

The new transmitter supports multiple codes on different channels at the same time, allowing to manage multiple coding with one device, making it perfect for all customers' needs.

SLH, SLHP and RC for new installations while SL & DS as additional units to existing ones.

Flexible Coding and Simplified Procedures

The transmitter allows easy code conversion and features simple, intuitive procedures with a bicolor LED indicator for effortless operation.

Patented single-battery design

The redesigned transmitter features an ergonomic, scratch-resistant structure that prevents accidental activations, offering durability and enhanced usability.

Excellent performance with a single CR2032 battery.

	Model	Decoding	Description	Item code
	XT02 868MHz	SLH - DS	2 channel transmitter (multiple saleable quantity 12 pcs)	787030
	XT4 868 SLH LR		4 channel transmitter (multiple saleable quantity 12 pcs)	787031

The radio signal communication emitted from the transmitter can be obtained through one of the following:



XF 868 MHz

1) Frequency module (compatible with all FAAC electronic control units equipped with a universal decoding system OMNIDEC, recognizable by the dedicated logo)

Model	Description	Item code
XF 868	Frequency module	787832

RP 868 SLH

2) Rapid plug in receiver (compatible with all FAAC electronic control units equipped with a 5-pin quick insertion connector, or external uses via connection to the accessory RP relay interface)



Model	Description	Item code
RP 868 SLH	1 channel plug in	787854
RP2 868 SLH	2 channels plug in	787855

PLUS1 868 MHz

3) **Multi-channel receivers and decoding boards** (for applications where more than 2 channels are required, the system will therefore be composed by 1 receiver and decoder cards equal to the number of users to be controlled)



Model	Description	Item code
PLUS1 868 MHz	Multi-channel receiver with integrated dipole antenna (to be combined with decoding board)	787834
DECODER SLH	Output channel decoder card with “relay” for piloting FAAC control and/or auxiliary devices	785534

TECHNICAL SPECIFICATIONS

Model	PLUS1 868	DECODER SLH
Power supply voltage	20 ÷ 30V - 24V~ (± 10%)	20 ÷ 30V~
Absorbed current	10 mA / V - 25 mA / V~	30 mA
Max number of connectable decoding control units	50	-
Radio signal decoding	Via DECODER	SLH
Storable codes	-	1000 codes
Connection	-	Connector (FAAC control units) and/or terminal



XR2N 433-868

4) **External receiver (system with integrated FDS-SLH-RC-DS decoding in dedicated enclosure for outdoor use)**



Model	Description	Item code
XR2N 433-868	XR2N FDS 433-868 Mhz Receiver	787023
XR4N 433-868	XR4N FDS 433-868 Mhz Receiver	787024

TECHNICAL SPECIFICATIONS

Model	XR2N 433-868	XR4N 433-868
Power supply voltage	12 ÷ 24 V~ - 12 ÷ 24 V~	
Receiving Frequency	433.92 Mhz - 868.35 Mhz	
Absorbed current	100 mA	
Radio signal decoding	FDS-DS-SLH-RC	
Storable codes	248	248 CH 1-2 / 248 CH 3-4
Number of channels	2	4
Number of relay outputs (N.A.)	1 pulse (CH1) - 1 pulse/fixed (selectable) (CH 2)	Pulse 2 (CH1-3) 1 pulsed / fixed (selectable) (CH 2) 1 timed (CH4)
Contact ratings	0,5 A / 120 VA	
Protection class	IP 44	
Operating ambient temperature	-20° C ÷ +55 ° C	
Dimensions (LxDxH)	90 x 70 x 32,5 mm	

ACCESSORIES



Antenna for RP receiver / XF / XR2 / XR4 with a fixing bracket and 5m coaxial cable

412006



Relay Interface for RP receivers for wiring connections

787725



Four channels extension module

102845

433MHz Omni System

NEW



XT02 433 MHz



XT04 433MHz

Use frequency 433.92 MHz

Coding type: SLH, SLHP, SL, DS

Universal Compatibility

The new transmitter supports multiple codes on different channels at the same time, allowing to manage multiple coding with one device, making it perfect for all customers' needs. SLH, SLHP and RC for new installations while SL & DS as additional units to existing ones.

Flexible Coding and Simplified Procedures

The transmitter allows easy code conversion and features simple, intuitive procedures with a bicolor LED indicator for effortless operation.

Patented single-battery design

The redesigned transmitter features an ergonomic, scratch-resistant structure that prevents accidental activations, offering durability and enhanced usability. Excellent performance with a single CR2032 battery.

Model	Decoding	Description	Item code
XT02 433	SLH-SLHP-SL-DS	2 channel transmitter (multiple saleable quantity 12 pcs)	787032
XT04 433		4 channel transmitter (multiple saleable quantity 12 pcs)	787033

The radio signal communication emitted from the transmitter can be obtained through one of the following:



XF 433 MHz

1) Frequency module (compatible with all FAAC electronic control units equipped with a universal decoding system OMNIDEC, recognizable by the dedicated logo)

Model	Description	Item code
XF 433	Frequency module	787831



RP 433 SLH-SL-DS-RC

2) Rapid plug in receiver (compatible with all FAAC electronic control units equipped with quick connector 5-pin or external users via the connection to the relay RP accessory)

Model	Description	Item code
RP 433 SLH	1 channel plug in	787852
RP2 433 SLH	2 channels plug in	787853

Model	Description	Item code
RP1 433 RC	1 channel plug in	787856
RP2 433 RC	2 channels plug in	787857



PLUS1 433 MHz

3) Multi-channel receivers and decoding boards (for applications where more than 2 channels are required, the system will therefore be composed by 1 receiver and decoder cards equal to the number of users to be controlled)

Model	Description	Item code
PLUS1 433 MHz	Multi-channel receiver with integrated dipole antenna (to be combined with decoding board)	787833
DECODER SLH	Output channel decoder card with "relay" for piloting FAAC control and/or auxiliary devices	785534

TECHNICAL SPECIFICATIONS

Model	PLUS1 433	DECODER SLH
Power supply voltage	20 ÷ 30V~ - 24V~ (± 10%)	20 ÷ 30V~
Absorbed current	10 mA / V~ - 25 mA / V~	30 mA
Max number of connectable decoding control units	50	-
Radio signal decoding	Via DECODER	SLH
Storable codes	-	1000 codes
Connection	-	Connector (FAAC control units) and/or terminal



XRN 433-868

4) External receiver (system with integrated FDS-SLH-RC-DS decoding in dedicated enclosure for outdoor use)

Model	Description	Item code
XR2N 433-868	XR2N FDS 433-868 Mhz Receiver	787023
XR4N 433-868	XR4N FDS 433-868 Mhz Receiver	787024

TECHNICAL SPECIFICATIONS

Model	XR2N 433-868	XR4N 433-868
Power supply voltage	12 ÷ 24 V~ - 12 ÷ 24 V~	
Receiving Frequency	433.92 Mhz - 868.35 Mhz	
Absorbed current	100 mA	
Radio signal decoding	FDS-DS-SLH-RC	
Storable codes	248	248 CH 1-2 / 248 CH 3-4
Number of channels	2	4
Number of relay outputs (N.A.)	1 pulse (CH1) - 1 pulse/fixed (selectable) (CH 2)	
Contact ratings	0,5 A / 120 VA	
Protection class	IP 44	
Operating ambient temperature	-20° C ÷ +55° C	
Dimensions (LxDxH)	90 x 70 x 32,5 mm	

ACCESSORIES



Antenna for RP receiver / XF / XR2 / XR4 with a fixing bracket and 5m coaxial cable
412006



Relay Interface for RP receivers for wiring connections
787725



Four channels extension module
102845

DECODER SLHP

Decoder card Single channel with relay output to manage FAAC electronic control units and auxiliary devices.



Model	Description	Item code
DECODER SLHP	1000 codes memory capacity expandable up to max 2000 codes (with optional MEX SLH) with connector for programming unit SLHP	785535

TECHNICAL SPECIFICATIONS

Model	DECODER SLHP
Power supply voltage	20 ÷ 30V ~
Absorbed current	30 mA
Radio signal decoding	SLH
Storable codes	1000 codes (expandable up to 2000)
Connection	Connector (FAAC control units) and/or terminal

WARNING: For SLHP system combine the PLUS1 433 MHz to the decoding unit DECODER SLHP

PROGRAMMING DEVICES for SLHP Systems

The programming of SLHP system is done through:



Model	Description	Item code
Programming unit SLHP	for DECODER SLHP	404015
Radiocoder 868 SLH	for the transmission of custom codes from the programming unit or from the PC to the decoder SLHP and transmitters SLH LR.	103054
SLHP Software	to program DECODER SLHP and SLH LR transmitters*	785538

ACCESSORIES



Mex SLH - 1000 codes additional memory for DECODER SLHP

799349

NOTE

(*) The programming unit for SLHP DECODER (cod.404015) is always required even when using the PC software. In this case the programming unit serves as an interface between DECODER SLHP and PC.

433MHz RC SYSTEM

433MHz RC System



Use frequency 433,92 MHz

Type of code: RC technology

RC = ROLLING code: the code varies whenever the transmitter is used. An algorithm recognizes and confirms the signal, only that of the transmitters coded by the receiver.



Model	Decoding	Description	Colour	Item code
XT4 433 RC	RC	4-channel transmitter (multiple saleable quantity 12 pcs.)	Grey	787456

The radio signal communication emitted from the transmitter can be obtained through one of the following:



XF 433 MHz

1) Frequency module (compatible with all FAAC electronic control units equipped with a universal decoding system OMNIDEC, recognizable by the dedicated logo)

Model	Description	Item code
XF 433	Frequency module	787831

RP 433 RC

2) Rapid plug in receiver (compatible with all FAAC electronic control units equipped with quick connector 5-pin or external users via the connection to the relay RP accessory)

Model	Description	Item code
RP1 433 RC	1 channel plug in	787856
RP2 433 RC	2 channels plug in	787857



XR 433 C

3) External receiver (system with integrated decoding in enclosure for outdoor use).



Model	Description	Item code
XR2 433 C	2 channels 433 MHz	787752
XR4 433 C	4 channels 433 MHz	787753

TECHNICAL SPECIFICATIONS

Model	XR2 433 C	XR4 433 C
Power supply voltage	12 ÷ 24 V~ - 12 ÷ 24 V	
Receiving Frequency	433.92 ± 0.1 Mhz	
Absorbed current	100 mA	
Radio signal decoding	DS-SLH-RC	
Storable codes	250	250 CH 1-2 / 250 CH 3-4
Number of channels	2	4
Number of relay outputs (N.A.)	Pulse 1 (CH1) 1 pulsed / fixed (selectable) (CH 2)	Pulse 2 (CH1-3) 1 pulsed / fixed (selectable) (CH 2) 1 timed (CH4)
Contact ratings	0,5 A / 12 ÷ 24V~ - 12 ÷ 24 V	
Protection class	IP44	
Operating ambient temperature	-20° C ÷ +55 ° C	
Dimensions (LxDxH)	90 x 70 x 32,5 mm	

ACCESSORIES



Antenna for RP receiver / XF / XR2 / XR4 with a fixing bracket and 5m coaxial cable
412003



Sun visor/Transparent wall support
390211



Relay Interface for RP receivers for wiring connections
787725

Simple pulse generators



XK10 - XK11



TECHNICAL SPECIFICATIONS

Model	XK10	XK10 INOX	XK11	XK11 INOX
Installation type	wall or on column installation	-	wall or on column installation	-
Microswitches for exchange	1	-	2	-
Contact ratings	100 mA	-	100 mA	-
Protection class	IP54	-	IP54	-
Operating ambient temperature	-20 °C +55 °C	-	-20 °C +55 °C	-
Dimensions (LxDxH)	72 x 35 x 100 mm	-	72 x 35 x 100 mm	-

Model	Description	Item code
XK10	Key operated button	401302
XK10 INOX	INOX key and command button	401044
XK11	Key operated button	401303
XK11 INOX	INOX key and command button	401045

Provided without lock

INSTALLATION ACCESSORIES



Lock with custom key (1-10)

71275101-10



High column H1000 (multiple quantity saleable 2 pcs)

401075



Double high column H1000 (multiple quantity saleable 2 pcs)

401080



Foundation plate for column

737100



External tube adapter

401064



Adapter for column or flush mounted ♦

401065

NOTE

♦ For wall installations with external or flush mounted pipe you must use the adaptors 401064 and 401065.

Simple pulse generators



XK10 B LC - XK11 B LC

TECHNICAL SPECIFICATIONS

Model	XK10 B	XK10 B INOX	XK11 B	XK11 B INOX
Installation type	wall or on column installation	-	wall or on column installation	-
Microswitches for exchange	1	-	2	-
Contact ratings	100 mA	-	100 mA	-
Protection class	IP54	-	IP54	-
Operating ambient temperature	-20 °C +55 °C	-	-20 °C +55 °C	-
Dimensions (LxDxH)	72 x 35 x 100 mm	-	72 x 35 x 100 mm	-

Model	Description	Item code
XK10 B	Key operated button (Availability is limited to existing inventory)	401304
XK10 B LC	Key operated button low-consumption	401252
XK10 B INOX LC	INOX key and command button low-consumption	401253
XK11 B	Key operated button (Availability is limited to existing inventory)	401305
XK11 B LC	Key operated button low-consumption	401254
XK11 B INOX	INOX key and command button (Availability is limited to existing inventory)	401047
XK11 B INOX LC	INOX key and command button low-consumption	401255

Provided without lock



INSTALLATION ACCESSORIES



Lock with custom key
(1-10)

71275101-10



High column H1000
(multiple quantity saleable 2 pcs)

401075



Double high column
H1000 (multiple quantity saleable 2 pcs)

401080



Foundation plate for column

737100



External tube adapter

401064



Adapter for column or flush mounted ♦

401065



XBR2 BUS-RELAY
Interface 2CH

790064



XBR4 BUS-RELAY
Interface 4CH

790065

NOTE

♦ For wall installations with external or flush mounted pipe you must use the adaptors 401064 and 401065.

Simple pulse generators



T20 I - T21 I - T21 IF

TECHNICAL SPECIFICATIONS

Model	T20 I	T21 I	T21 IF
Installation type		embedded	
Microswitches for exchange	1		2
Contact ratings		10 A / 250V	
Protection class		IP54	
Operating ambient temperature		-20°C ÷ +55°C	



Model	Description	Item code
T20 I (*)	Key operated buttons	401014
T21 I (*)	Key operated buttons	401015
T21 IF (**)	Key operated buttons	401017

T20 E - T21 E - T21 EF

TECHNICAL SPECIFICATIONS

Model	T20 E	T21 E	T21 EF
Installation type		wall	
Microswitches for exchange	1		2
Contact ratings		10 A / 250V	
Protection class		IP54	
Operating ambient temperature		-20°C ÷ +55°C	



Model	Description	Item code
T20 E (*)	Key operated button	401012
T21 E (*)	Key operated button	401013
T21 EF (**)	Key operated button	401016

INSTALLATION ACCESSORIES



Enclosure to be embedded (T20 - T21)
(20 pcs. pack)

720316



European cylinder lock (T20-T21-XK30) with customised key from 1 to 10

712052-61

NOTE

(*) The key operated push-buttons T20 and T21 are supplied without a lock.
(**) Key operated push-buttons T21 EF are supplied without a lock and provision for shutter electrobracke unlock device.

Simple pulse generators



XK30

TECHNICAL SPECIFICATIONS

Model	XK30
Installation type	wall
Microswitches for exchange	2
Contact ratings	10 A / 250V~
Protection class	IP30



Model	Description	Item code
XK30	Key selector with lever release	391456



Electronic pulse generators

XKP B



TECHNICAL SPECIFICATIONS

Model	XKP B INOX
Installation type	wall or on column installation
Power supply voltage	Bus 2easy, with 2 non polarised wires 24 V
Protection class	IP54
Dimensions (LxDxH)	72 x 21 x 100 mm
Operating ambient temperature	-20 °C +55 °C
Max. Number of users' codes	255
Max. Number of commands	2 (up to 4 with the XBR4 adapter)

Model	Description	Item code
XKP B INOX LC	Controller with keypad low-consumption	404045

INSTALLATION ACCESSORIES



High column H1000
(multiple quantity
saleable 2 pcs)

401075



Double high column
H1000 (multiple
quantity saleable 2
pcs)

401080



Foundation plate for
column

737100



External tube adapter

401064



Adapter for column or
flush mounted

401065

ACCESSORIES



XBR2 BUS-RELAY
Interface 2CH

790064



XBR4 BUS-RELAY
Interface 4CH

790065

NOTE

For wall installations with external or flush mounted pipe you must use the adaptors 401064 and 401065.



Electronic pulse generators



XKP W

TECHNICAL SPECIFICATIONS

Model	XKP W 433	XKP W 868
Installation type	wall or on column installation	
Frequency of use	433.92 MHz	868.35 MHz
Radio signal decoding	SLH: Rolling code encrypted self-learning	
Power supply voltage	Battery powered CR2450 3 W qt. 2	
Average battery life	2 years	
Protection class	IP54	
Dimensions (LxDxH)	72 x 21 x 100 mm	
Operating ambient temperature	-20 °C +55 °C	
Max. Number of users' codes	255	
Max. Number of commands	4	

Model	Description	Item code
XKP W 433 INOX	Combination radio transmitter	404037
XKP W 868 INOX	Combination radio transmitter	404038

Compatible with 433 Mhz receivers, see page 173 o with 868 MHz receivers, see page 171

INSTALLATION ACCESSORIES



High column H1000
(multiple quantity
saleable 2 pcs)

401075



Double high column
H1000 (multiple
quantity saleable 2
pcs)

401080



Foundation plate for
column

737100



External tube adapter

401064



Adapter for column or
flush mounted ♦

401065

NOTE

♦ For wall installations with external or flush mounted pipe you must use the adaptors 401064 and 401065.



Electronic pulse generators

XTR B

TECHNICAL SPECIFICATIONS

Model	XTR B	XTR B INOX
Installation type	wall or on column installation	
Power supply voltage	Bus2Easy, with 2 non polarised wires 24 V 	
Max consumption	50 mA	
Max number of connectable READERS on the Bus2Easy control unit	14 (single channel) - 4 (two-channels)	
Protection class	IP54	
Dimensions (LxDxH)	100 x 21 x 72 mm	
TAG format	13,56 MHz Keyring	



Watch the “TAG XTR B reader” tutorial video
vimeo.com/faacgroup/xtrb-en

INSTALLATION ACCESSORIES



Double high column
H1000 (multiple
quantity saleable 2
pcs)
401080



High column H1000
(multiple quantity
saleable 2 pcs)
401075



Foundation plate for
column
737100



External tube adapter
401064



Adapter for column or
flush mounted ♦
401065

ACCESSORIES



Metal keytag
(30 pcs pack)
401306



Keytag
(30 pcs pack)
401048



XBR2 BUS-RELAY
Interface 2CH
790064



XBR4 BUS-RELAY
Interface 4CH
790065

NOTE

♦ For wall installations with external or flush mounted pipe you must use the adaptors 401064 and 401065.



Pulse generators for special applications

FG1 - FG2

TECHNICAL SPECIFICATIONS

Model	FG1	FG2
Number of connectable turns	1	2
Power supply voltage	24V - 24V~	
Contact ratings	250 mA / 24V	
Sensitivity levels independent from loop inductance	4	
Installation type	On DIN guide	
Operating ambient temperature	-20°C ÷ +55°C	

Model	Description	Item code
FG1 single channel	Metallic mass detectors	785529
FG2 two-channels		785527

Additional power feeder

MINISERVICE board

TECHNICAL SPECIFICATIONS

Model	-
Power supply voltage	230V~ (+5% - 10%) 50(60) Hz
Max. power	35 VA W
Contact ratings	10 A / 24V - 10 A / 230V~
Electric lock power supply voltage	12V~
Accessories power supply	500 mA / 24V
Operating ambient temperature	-20°C ÷ +55°C

Model	Description	Item code
MINISERVICE	Additional power feeder	790904

ACCESSORIES

Enclosure for
MINISERVICE board
EM (IP65 Protection)

720050



Adjustable wall photocells

XP 20 D



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XP 20 D
Power supply voltage	24V - 24V~
Photocells max distance	20 m
Installation type	wall
Protection class	IP54
Auto-alignment angle	± 7° (20m) ± 13,5° (5m)
Horizontal adjustment angle	-90° +90°
Dimensions (LxDxH)	41,5 x 42,5 x 130 mm
Absorbed current	Rx (30 mA) + Tx (20 mA)
Output types	N.C.
Contact ratings	60 VA / 24 W
Operating ambient temperature	-20°C ÷ +55°C

Model	Description	Item code
XP 20 D	Adjustable wall photocell	785102

XP 20B D LC



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XP 20B D
Power supply voltage	BUS 2easy, two non-polarised wire system 24V
Photocells max distance	20 m
Installation type	wall
Protection class	IP54
Auto-alignment angle	± 7° (20 m) ± 13,5° (5 m)
Horizontal adjustment angle	-90° +90°
Dimensions (LxDxH)	41,5 x 42,5 x 130 mm
Absorbed current	Rx (10 mA) + Tx (10 mA)
Operating ambient temperature	-20°C ÷ +55°C

Possibility to install up to 16 photocell couples on the same installation.

Model	Description	Item code
XP 20B D	Adjustable wall photocell (Availability is limited to existing inventory)	785103
XP 20B D LC	Adjustable wall photocell low-consumption	785120



INSTALLATION ACCESSORIES



BUS XIB interface
(for E045 or E045S
or E034 boards with
photocell no BUS)

790062



Low column H500
(multiple quantity
saleable 2 pcs)

401070



High column H1000
(multiple quantity
saleable 2 pcs)

401075



Double high column
H1000 (multiple
quantity saleable 2
pcs)

401080



Foundation plate for
column

737100



Adjustable wall photocells

XP 20W D



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XP 20W D
Power supply voltage	Rx: 12 ÷ 24V~ - 12 ÷ 24 V Tx: 12 ÷ 24V~ - 12 ÷ 24 V or with battery (3 VcR2 - not included)
Photocells max distance	20 m
Installation type	wall
Protection class	IP54
Auto-alignment angle	± 7° (20 m) ± 13,5° (5 m)
Horizontal adjustment angle	-90° +90°
Dimensions (LxDxH)	41,5 x 42,5 x 130 mm
Absorbed current	Rx (30 mA) + Tx (40 mA a batteria o 5 mA a 24V)
Operating ambient temperature	-20°C ÷ +55°C

Possibility to install up to 4 photocell couples on the same installation.



Model	Description	Item code
XP 20W D	Adjustable wall photocell	785104

INSTALLATION ACCESSORIES



CR2 3V lithium
battery for XP 20W D
photocells

105128



Low column H500
(multiple quantity
saleable 2 pcs)

401070



High column H1000
(multiple quantity
saleable 2 pcs)

401075



Double high column
H1000 (multiple
quantity saleable 2
pcs)

401080



Foundation plate for
column

737100

NOTE

◆ With 2 pairs of XP20 D photocells, position the TX-RX pairs across from each other and at a sufficient distance, making sure that there is no optical interference, even from reflections or refractions, in which case increase the distance between one pair and the other or use XP 20W D or XP20B D models that allow the selection of different transmission channels for each pair.



Wall or Flush mounted photocells

XP 30

TECHNICAL SPECIFICATIONS

Model	XP 30	XP 30 INOX
Power supply voltage	24V - 24V~	
Photocells max distance	30 m	
Installation type	wall/column	
Protection class	IP54	
Alignment	Automatic	
Auto-alignment angle	± 7° (20m) ± 13,5° (5m)	
Dimensions (LxDxH)	55,4 x 21,5 x 78,4 mm	
Absorbed current	Rx (30 mA) + Tx (20 mA)	
Output types	Relay - N.C./N.O.	
Contact ratings	60 VA / 24 W	
Operating ambient temperature	-20°C ÷ +55°C	

Possibility to install up to 4 photocell couples on the same installation.

Model	Description	Item code
XP 30	Wall photocell	785105
XP 30 INOX	Wall photocell	7851051

XP 30B LC

DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XP 30B	XP 30B INOX
Power supply voltage	BUS 2easy, with 2 non polarized wires 24V	
Photocells max distance	30 m	
Installation type	wall/column	
Protection class	IP54	
Alignment	Automatic	
Auto-alignment angle	± 7° (20m) ± 13,5° (5m)	
Dimensions (LxDxH)	55,4 x 21,5 x 78,4 mm	
Absorbed current	Rx (25 mA) + Tx (15 mA)	
Operating ambient temperature	-20°C ÷ +55°C	

Possibility to install up to 16 photocell couples on the same installation.

Model	Description	Item code
XP 30B INOX LC	Wall photocell low-consumption	785122
XP 30B LC	Wall photocell low-consumption	785121



INSTALLATION ACCESSORIES

External tube adapter	Adapter for column or flush mounted*	Low column H500 (multiple quantity saleable 2 pcs)	Double high column H1000 (multiple quantity saleable 2 pcs)	Double high column H1000 (multiple quantity saleable 2 pcs)	Foundation plate for column
401064	401065	401070	401080	401080	737100

NOTE

* For wall installations with external or flush mounted pipe you must use the adaptors 401064 and 401065.

XS

Conductive rubber edge

Certified as category 2 according to EN 12978




Plug and Play conductive rubber safety edge 8,2 Kohm
Easier assembly due to the innovative solution with mechanically coupled terminals (except XS10)
Rubber profile heights 10mm/30mm/55mm/85mm
Aluminium support profile
Obstacle detection with +/- 45° angles
Protection class IP 65
Available in KIT VERSION (for more than one safety edge) or in CUSTOM KITS (for one safety edge up to 2,5 m)
The XS edges need a CN 60 E control unit (see page 193) or the radio system of the edges (see page 194)

Model	Description	Item code
CUSTOMISED KIT Safety edge up to 2.5 m	XS10 SAFETY EDGE KIT (L=2.5M)*	105536
	XS30 SAFETY EDGE KIT (L=2.5M)*	105538
	XS55 SAFETY EDGE KIT (L=2.5M)*	105531
	XS85 SAFETY EDGE KIT (L=2.5M)*	105547
*THE KIT CONTAINS: 1 rubber profile XS 2.5m; 1 terminal with XSP R8.2 resistance; 1 terminal with XSP C0.5 cable; 1 aluminum profile for XS 2.5m		
Model	Description	Item code
KIT SUPPLY XS30	Sensitive rubber profile 1 m (minimum order quantity 30m)	105781
	Terminal with XSP R8.2 resistance	105592
	Terminal with XSP 0.5 cable	105593
	Aluminum profile kit 10 PCS 2.5m XS30	105537
KIT SUPPLY XS55	Sensitive rubber profile 1 m (minimum order quantity 30m)	105782
	Terminal with XSP R8.2 resistance	105594
	Terminal with XSP 0.5 cable	105598
	Aluminum profile kit 10 PCS 2.5m XS55-XS85	105687
ORDER EXAMPLE: To make 10 safety edges of 2.5 m each, it is necessary to order: 1 piece of the sensitive rubber profile, 1 piece of the aluminum profile 10 pieces of each of the two terminals		

INSTALLATION EXAMPLES

The only conductive rubber edge **Plug and Play** on the market
Assemble your certified safety edge in a few minutes by following 4 steps:
Does not require any type of glueing or long waiting times

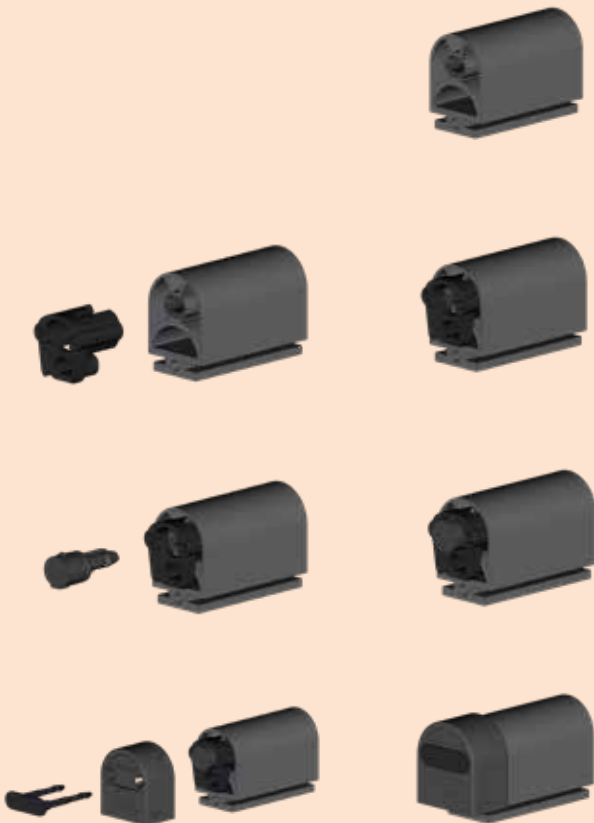

1. Cut the rubber profile to the desired length.
 The cut must be precise to ensure correct coupling
 with the terminals; it is recommended to use a cutter that holds
 the profile in position.
2. Remove the 8K2 resistance.
 Insert the support as far as it will go.
3. Insert the terminal as far as it will go into the support.
- 4 Insert the cover into the rubber profile by engaging the
 coupling with the press on seat.
 The conductive rubber edge is ready to be fixed on the
 aluminium supporting profile.

INSTALLATION ACCESSORIES



CN 60 E Control unit

785200



XT S 868 transmitter

787012



XR S 868 receiver

787013



XS10 Glue and Primer
kit

105535



Control unit for Safety Edges

Certified as category 2 according to EN 12978

CN 60 E

TECHNICAL SPECIFICATIONS



Model	CN 60 E
Management	Up to two series made by 4 resistive 8K2 safety edges in parallel Selection of number of applied edges through dip-switches
Features	Test input
	Signalling LED
	Provision for fixing on a DIN bar
Protection class	IP20
Operating ambient temperature	-20°C ÷ + 55°C

Model	Description	Item code
CN 60 E	Control units	785200

Safety edges radio system

Certified as EN 13849-1 PL “d” and as category 2 Norm EN 12978

The radio system simplifies the installations creation (including complex ones) with no needs of wire cabling activities between safety edges and the automation’s control board.

The radio system is made of a XRS 868 radio receiver able to connect with XTS 868 transmitters, one or two resistive safety edges 8,2 KOhm can be connected to the transmitters or auxiliary devices.

Each radio receiver XRS 868 is able to manage up to 6 transmitters XTS868, i.e up to 12 safety edges mod. XS55 (8,2 KOhm).

The XRS 868 receiver allows cabling to the standard control boards equipped with safety inputs N.C. o 8,2 KOhm through independent relay outputs, or to FAAC control boards equipped with BUS 2easy through just 2 non polarized wires.



XT S 868



Model	Description	Item code
XT S 868	Transmitter	787012

TECHNICAL SPECIFICATIONS

Model	XTS 868
Power supply voltage	2 batteries 1.5V AA lithium
Installation type	wall
Transmission frequency	868 Mhz
Frequency self-regulation	on 4 channels
Nominal flow	max 20m
Max number of edges	2
Edges technology	mechanic (N.C. contact) and/or resistive (8,2 KOhm)
Protection class	IP55
Dimensions (LxDxH)	50 x 31,5 x 158,5 mm
Operating ambient temperature	-20°C ÷ +55°C



XR S 868



Model	Description	Item code
XR S 868	Receiver	787013

TECHNICAL SPECIFICATIONS

Model	XRS 868
Power supply voltage	BUS 2easy o 12-24V  / ~
Installation type	wall
Receiving Frequency	868 Mhz
Frequency self-regulation	on 4 channels
Absorbed current	54 mA
Programming	4 each transmitter
Max number of transmitters	6 (XTS 868)
Terminal board inputs	Power supply/BUS, Test (FAIL-SAFE)
Terminal board outputs	Relay 1 (N.C. o 8K2) - Relay 2 (N.C. o 8K2) - Relay 1+2 (N.O/N.C.) - Battery level
Protection class	IP55
Dimensions (LxDxH)	84 x 36,5 x 112 mm
Operating ambient temperature	-20°C ÷ +55°C

SAFEcoder

Magnetic Absolute Encoder



Model	Item code
SAFEcoder BUS magnetic absolute encoder (FAAC Patent)	404040
SAFEcoder LC absolute magnetic BUS encoder low-consumption (FAAC Patent)	404047
SAFEcoder for operator 412 (FAAC Patent)	404041
LC SAFEcoder low-consumption for 412 operator(FAAC Patent)	404048
Encoder unit for 770N	404035
Encoder group L low-consumption for 770N	404046



TECHNICAL SPECIFICATIONS

Model	SAFEcoder
Power supply voltage	BUS 2easy
Protection class	IP 66
Operating ambient temperature	-20°C ÷ +55°C

Note: the SAFEcoder is only compatible with the E045S, E145S, E034 and E124S control units

Laser Sensors

Certified as EN 13849-1 PL “d” and as category 2 EN 12978



The XGUARD 10H Horizontal Laser Scanner can be used in conjunction with automatic barriers to reliably detect vehicles and pedestrians, ensuring maximum protection for people. It is typically used in areas where it is not possible to install induction loops (for example when there are metal reinforcement meshes or electric floor heating).

The laser scanner emits four overlapping horizontal beams and is able to scan a maximum area of 9.9 x 9.9 m. This area can be divided into a safety field and an opening field. Depending on the settings, the barrier can, for example, only open when a vehicle is detected (and not when a person is detected) and close only when there are no vehicles and/or people inside the safety field.

ACCESSORIES



XGUARD 10H
Horizontal Laser
Sensor

105043



XGUARD-BA fastening
bracket

785031



XGUARD support for
column

430003



Reference column for
XGUARD

MLPREF01



Radio control TF1
(for X-GUARD
adjustments)

785541



Foundation plate for
column

737100

ACCESSORIES



High column H1000
(multiple quantity
saleable 2 pcs)

401075



The XGUARD10 vertical laser scanner can be used in conjunction with automatic barriers to ensure the safe passage of commercial vehicles, trucks, or motor vehicles with protrusions, preventing the beams from lowering when the vehicles or loads are still under them. The laser scanner generates a vertical detection field close to the beam of the barrier and prevents it from closing when there is an object within the detection field. This means all types of vehicles are reliably detected, preventing damage to bodywork, the beam or the frame of the barrier. With a maximum detection range of 9.9 x 9.9 m, the laser scanner is also suitable for detecting high vehicles and for use in particularly wide passages. The scanner emits four vertical beams side by side for maximum effectiveness.

ACCESSORIES



XGUARD-10 Vertical
Laser Sensor

785028



Pole for vertical laser
sensor

MLPF01



Cover for vertical laser
sensor

MLGVER_0000



Radio control TF1
(for X-GUARD
adjustments)

785541

M60

Electromechanical edge



TECHNICAL SPECIFICATIONS

Model	M60
Rubber profile height	60 mm
Protection class	IP 55
Operating ambient temperature	-20°C ÷ +55°C

Model	Description	Item code
M60	length m 1,5	736425
	length m 1,7	736426
	length m 2,0	736427
	length m 2,5	736428
	length m 3,0	736429

FAAC SAFE PRO

Impact curve meter



- Extra-bright light blue LED display
- Automatic date and time setting
- Visualisation of measurements (on mobile devices) - after sending the measurements, via GSM interface, to the platform. Visualisation without APP via portal access.
- Extra data visualisation (on mobile devices) - always after sending data:- GPS position- Orientation of instrument position- Measuring point association according to EN12453
- Measurement limit recognition function (according to EN12453) with flashing and acoustic warning
- Continuous measurement function as "dynamometer"
- Access to the Cloud area (BLUEFORCE CLOUD) - 1st year of service included with purchase

Model	Description	Item code
FAAC SAFE PRO	Impact curve meter	950224

The kit includes

Q.ty	Description
1	FAAC SAFE PRO Meter
1	USB cable
1	Linear extension
1	Allen screw
1	Quick instructions



Flashing lights



XLED

- Italian design that integrates perfectly with all architecture styles.
- Equipped with 40 LEDs to ensure visibility, even in the middle of the day.
- One single version for 24VDC, 230VAC, 115VAC power supplies.
- Thanks to the integrated XLED antenna, it is compatible with 433 Mhz and 868 Mhz frequency receivers.
- Suitable for installation on the column or sides



TECHNICAL SPECIFICATIONS

Model	XLED
Power supply voltage	230 - 115 - 24 V
Protection class	IP 54
Operating ambient temperature	-20°C ÷ +55°C
Dimensions (LxDxH)	135 x 55 x 165 mm
Number of high brightness LED	40

Model	Power supply	Item code
XLED	230 -115 - 24 V	410029

XL24 L

TECHNICAL SPECIFICATIONS



Model	XL 24 L
Protection class	IP 55
Operating ambient temperature	-20°C ÷ +55°C

Model	Power supply	Item code
XL24 L 24V/3 W (only for D600-D1000 models)	24V	410017



Electric locks

Model	Item code
12V~ Electric lock complete with floor-fitting receiver slot	712650
Receiver slot with pilaster (single-leaf gates)	712990
Internal cylinder with 2 keys	from 712651001 to 712651010
External cylinder with 2 keys	from 712652001 to 712652010



Leaf lock

Model	Item code
BLOCKIT	401026

Oil



Model	Description	Item code
Hydraulic oil "FAAC HP OIL"	Pack of 12 bottles (1-litre each)	714017
	10-liter tank	714041

AUTOMATIONS FOR SPRING BALANCED ROLLING SHUTTERS

Type of installation

	RL200	RH200B	RH240	RH240B
Shaft diameter shutter (mm)	60 48* 42*	60 48* 42*	76	76
Box diameter spring (mm)	200 220	200 220	240	240
Capacity lifting (Kg)	170	280	180	360
(*) through the use of optional gear sleeves				

Typical Installation Examples page. 306

RL200

230V Gearmotor



Supporting pole diameter

60 mm e 48/42 mm
(with adapter)

Spring boxes diameter

200/220 mm

Lifting capacity

170 Kg

- Limit switch with self-learning positions feature
- Provision for anti-drop safety device application (EN 13241-1).
- To be used with shutters up to 170 Kg.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	RL200 REVERSIBLE	RL200 EF
Power supply voltage	220-240V ~ 50/60Hz	
Max. torque	170 Nm (*)	
Operating ambient temperature	-20°C ÷ + 55°C	
Lifting capacity	170 Kg (*)	
Max speed	10 rpm (*)	
Supporting pole diameter	60 mm and 48/42 mm (with accessory cod. 391452)	
Spring boxes diameter	200/220 mm	
Max. rolling shutter height	6 m	
Max. rolling shutter width	4.5 m	
Operator weight	8 Kg	
Electronic equipment	Not included	

(*) data referred to 230V~ 50Hz

FAMILY MODELS

Model	Item code
RL200 REVERSIBILE	109950
RL200 EF	109951
RL 200 EF 115V	1099511

PACKS

RL220 includes: a gearmotor, adapters for spring boxes 200/220, accessories for installation.
The EF versions include the electric brake (built in).

Typical Installation Examples page. 306

ELECTRONIC CONTROL UNITS



Electronic control board
200MPS
Info at page 151

790905

ACCESSORIES



Enclosure mod. E for
electronic control units

720119



Electric brake Kit ♦

391450



Pole adapter 60 > 48/42
mm

391452

>>



Parachute for crown
200-220

391454



XK30 Key selector with
lever release

391456



Spring adapter 200 >
220 mm

391453

NOTE

♦ for external release use the anti-burglar key selector with lever release
code 391456

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

RH200B

230V Gearmotor

Supporting pole diameter

60 mm e 48/42 mm
(with adapter)

Spring boxes diameter

200/220 mm

Lifting capacity

280 Kg



- Limit switch with self-learning positions feature
- Provision for anti-drop safety device application (EN 13241-1).
- To be used for shutters up to 280 Kg.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	RH200B / RH200B EF
Power supply voltage	220-240V ~ 50/60Hz
Max. torque	280 Nm (*)
Operating ambient temperature	-20°C ÷ + 55°C
Lifting capacity	280 Kg (*)
Max speed	9 rpm (*)
Supporting pole diameter	60 mm and 48/42 mm (add accessory 391452)
Spring boxes diameter	200/220 mm
Max. rolling shutter height	6 m
Max. rolling shutter width	4.5 m
Operator weight	12.5 Kg
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz

FAMILY MODELS

Model	Item code
RH200B REVERSIBLE	109960
RH200B EF	109961

PACKS

RH200B includes: a gearmotor, adapters for spring boxes 200/220, accessories for installation.
The EF versions include the electric brake (built in).

Typical Installation Examples page. 306

ELECTRONIC CONTROL UNITS



Electronic control board
200MPS
Info at page 151

790905

ACCESSORIES



Enclosure mod. E for
electronic control units

720119



Electric brake Kit ♦

391450



Pole adapter 60 > 48/42
mm

391452

>>



Parachute for crown
200-220

391454



XK30 Key selector with
lever release

391456



Spring adapter 200 >
220 mm

391453

NOTE

♦ for external release use the anti-burglar key selector with lever release
code 391456

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

RH240

230V Gearmotor



Supporting pole diameter

76 mm

Spring boxes diameter

240 mm

Lifting capacity

180 Kg

- Limit switch with self-learning positions feature
- To be used with poles of diam. 76 mm and spring boxes of diam. 240 mm.
- To be used with shutters up to 180 Kg.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	RH240 EF
Power supply voltage	220-240V ~ 50/60Hz
Max. torque	210 Nm (*)
Operating ambient temperature	-20°C ÷ + 55°C
Lifting capacity	180 Kg (*)
Max speed	9 rpm (*)
Supporting pole diameter	76 mm
Spring boxes diameter	240 mm
Max. rolling shutter height	6 m
Max. rolling shutter width	4.5 m
Operator weight	10 kg
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz

FAMILY MODELS

Model	Item code
RH240 EF	109971

PACKS

RH240 EF includes: a gearmotor equipped with electric brake and installation accessories.

Typical Installation Examples page. 307

ELECTRONIC CONTROL UNITS



Electronic control board
200MPS
Info at page 151

790905

ACCESSORIES



Enclosure mod. E for
electronic control units

720119



Electric brake Kit ♦

391450



XK30 Key selector with
lever release

391456

>>



Parachute for crown
240

391455

NOTE

♦ For external release use the anti-burglar key selector with lever release code 391456

OTHER
ACCESSORIES

Key operated
buttons
page 180

Safety edges
page 190

Transmitters
and receivers
page 168

Photocells and
columns
page 188

Flashing lights
page 199

Various
accessories
page 200

RH240B

230V Gearmotor



Supporting pole diameter

76 mm

Spring boxes diameter

240 mm

Lifting capacity

360 Kg

- Limit switch with self-learning positions feature
- To be used with poles of diam. 76 mm and spring boxes of diam. 240 mm.
- To be used with shutters up to 360 Kg.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	RH240B EF SUPER
Power supply voltage	220-240V ~ 50/60Hz
Max. torque	420 Nm (*)
Operating ambient temperature	-20°C ÷ + 55°C
Lifting capacity	360 Kg (*)
Max speed	9 rpm (*)
Supporting pole diameter	76 mm
Spring boxes diameter	240 mm
Max. rolling shutter height	6 m
Max. rolling shutter width	4.5 m
Operator weight	17 Kg
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz

FAMILY MODELS		PACKS
Model	Item code	RH240B EF SUPER includes: a gearmotor equipped with electric brake and installation accessories.
RH240B EF SUPER	109981	
		Typical Installation Examples page. 307

ELECTRONIC CONTROL UNITS	ACCESSORIES		
 Electronic control board 200MPS Info at page 151 790905	 Enclosure mod. E for electronic control units 720119	 Electric brake Kit ♦ 391450	 XK30 Key selector with lever release 391456

>>			
 Parachute for crown 240 391455			

NOTE
♦ For external release use the anti-burglar key selector with lever release code 391456

OTHER ACCESSORIES	Key operated buttons page 180	Safety edges page 190	Transmitters and receivers page 168	Photocells and columns page 188	Flashing lights page 199	Various accessories page 200
--------------------------	---	---------------------------------	---	---	------------------------------------	--



KEYDOM

Keydom is the turn-key, plug-and-play access control system from FAAC.

This integrated system doesn't need any special installation, as its software comes pre-installed and included in the Network Controller unit.

The application is entirely web based and easily configurable through a browser opened on any device connected to the system.



WEB BASED

The entirely web-based software structure means that just one, even mobile, device and a web browser are all you need to access and manage the KEYDOM system.



EMBEDDED SOFTWARE

The Keydom software is pre-installed directly into the Network Controller. All you have to do is turn it on and configure the desired functions.



USER FRIENDLY

You do not need to be an expert to configure the system, simply follow the instructions on the system screens.



SOFTWARE ENTERPRISE

The extreme scalability of the system allows different architectures to be used according to your needs; if they change over time, the system will adapt to them, always making the initial investment worthwhile.




READY TO BE INTEGRATED

The KEYDOM system has been created to be integrated with other systems and technologies to provide maximum security and performance

SYSTEM ARCHITECTURE


INTEGRATED LOCAL SYSTEM

1 Network Controller
Max 32 access points
Max 200,000 users

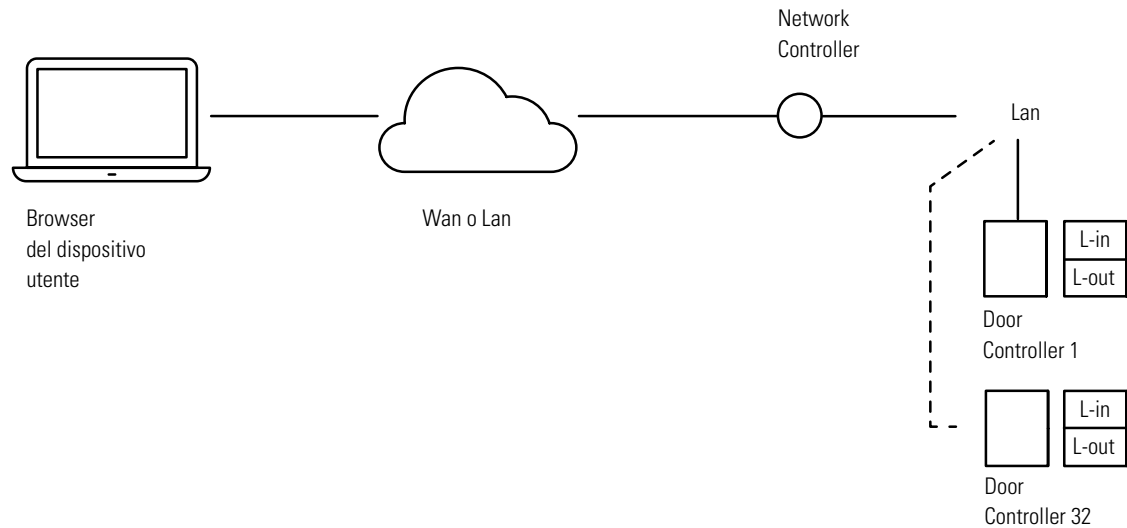

INTEGRATED DISTRIBUTED SYSTEM


1 Network Controller
Max 32 access points
Max 200,000 users

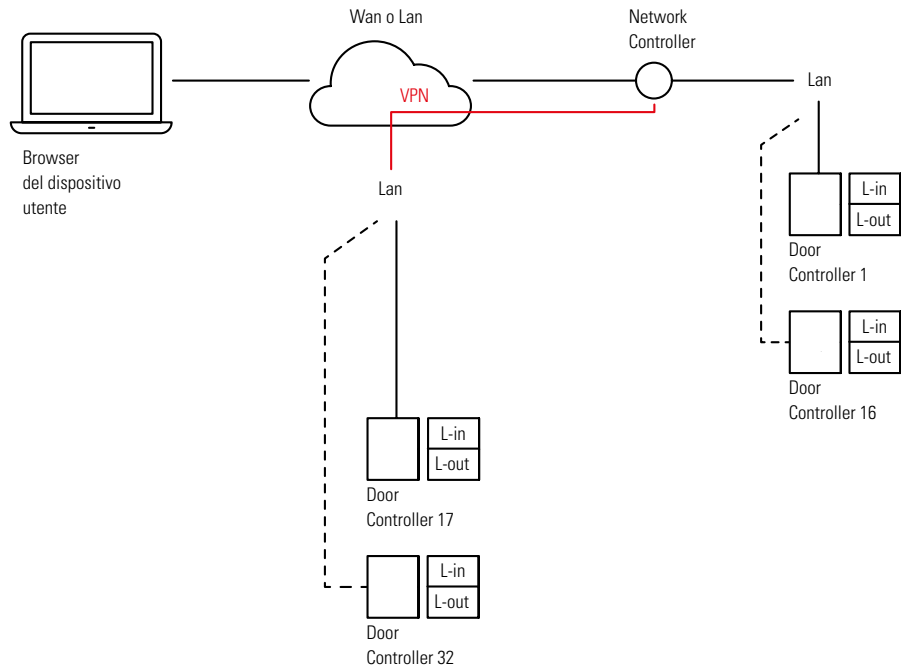

The extreme scalability of the system allows different architectures to be used according to your needs; if they change over time, the system will adapt to them, always making the initial investment worthwhile.

**ENTERPRISE SYSTEM
& ENTERPRISE-LITE**

Enterprise Lite Software: max 72 accesses
Enterprise Software: max 4,096 accesses
Max 500,000 users

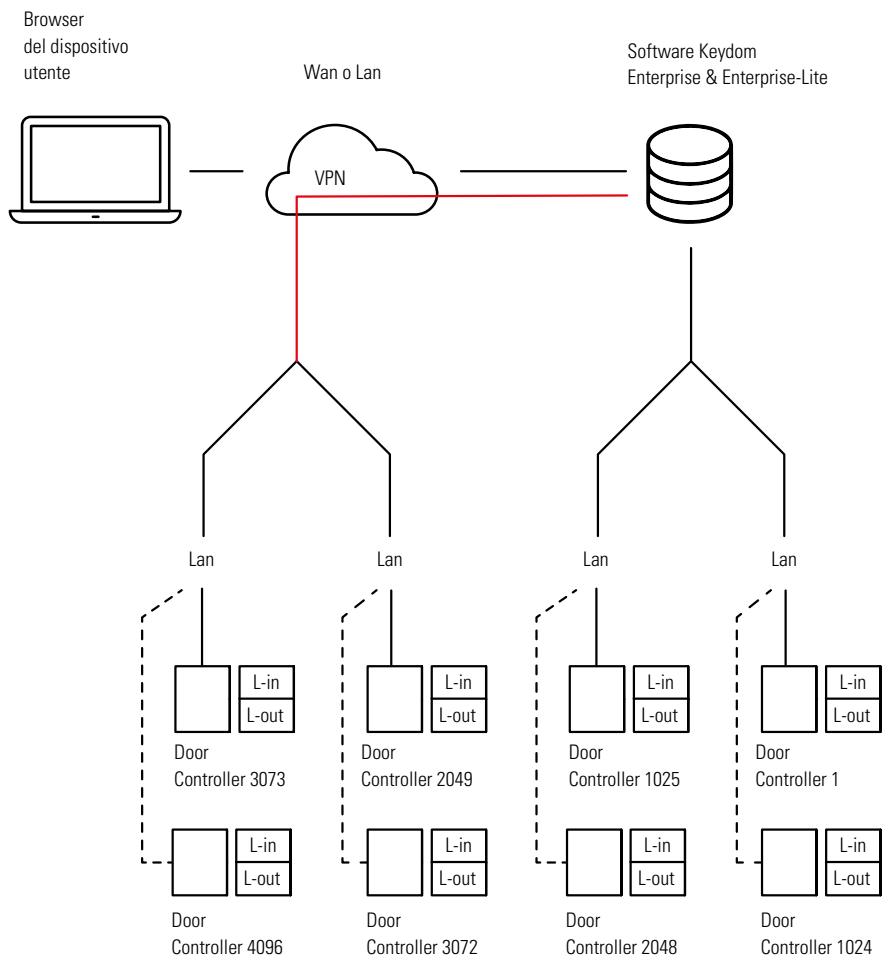

KEYDOM IS FLEXIBLE


INTEGRATED LOCAL SYSTEM



INTEGRATED DISTRIBUTED SYSTEM



**ENTERPRISE SYSTEM
& ENTERPRISE-LITE**

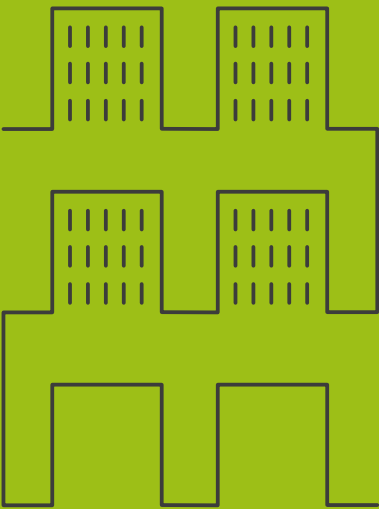

NETWORK CONTROLLER

System management centre with
pre-installed software



- Based on SoM System-On-Modules, it is the core of the entire KEYDOM access control system.
- KEYDOM software pre-installed.
- Easy to program via browser.
- Manages up to 32 access points.



TECHNICAL SPECIFICATIONS

Model	ENC 32
Inputs	1 Ethernet port 10/100 Mb, 2 RS 485 ports
Power supply voltage	11÷15 Vdc
Enclosure	Plastic box (accessory)
Operating ambient temperature	-20 ÷ +55°C
Control unit dimensions	132x110 mm
Enclosure dimensions (LxDxH)	204x85x265 mm

FAMILY MODELS

Model	Description	Item code
ENC 32	ENC 32 Network Controller	202317

ACCESSORIES



12 Vdc - 2A - 24W
power supply

202322



Enclosure mod. E for
electronic control units

720119

DOOR CONTROLLER

Control unit for pedestrian and vehicle accesses



- Controller for a bidirectional pedestrian or vehicular access point (entry / exit).
- The "Door Controller" access point control panel has been designed to be able to manage all access point connections (input/output) in a simplified manner, optimizing the cabling.
- The Door Controller manages readers with multiple communication protocols



TECHNICAL SPECIFICATIONS

Model	EDC 01L/R
Inputs	1 Ethernet port 10/100 Mb, 1 RS 485 port, 3 inputs (door status, exit button, 1 auxiliary), 1 bi-directional bus for 2 readers (also R/W technology), 2 Wiegand/magnetic stripe ports for commercial readers, 2 RS232 ports for commercial readers (e.g. barcode)
Outputs	2 250vac 10A relays (NO and NC)
Events	Max 8,000 (offline)
Number of users managed	Max 50,000 (offline)
Power supply voltage	11÷15 Vdc
Enclosure	Plastic box (accessory)
Operating ambient temperature	-20 ÷ +55°C
Control unit dimensions	132x110 mm
Enclosure dimensions (LxDxH)	204x85x265 mm
Battery	For RTC, cards and events

FAMILY MODELS

Model	Description	Item code
EDC 01L/R	EDC 01L/R LAN/RS485 Door Controller	202323

ACCESSORIES



12 Vdc - 2A - 24W
power supply

202322



Enclosure mod. E for
electronic control units

720119



I/O expansion card - 4
OUTPUT 24VDC 1A - 4
INPUT

202353

XTRR

Proximity reader

Type of reader

passive proximity

Installation

wall or column



XTRR 125



XTRR 1356

- Suitable for outdoor installations
- Aluminum case and steel cover
- Compact, solid, slim: suitable for all architectural contexts



TECHNICAL SPECIFICATIONS

Model	XTRR 125	XTRR 1356
Enclosure	Metal	
Operating ambient temperature	-20 ÷ +55°C	
Dimensions (LxDxH)	72x28x100 mm	
Connection	Bi-directional BUS (for connection to the Door Controller)	
Number of high brightness LED	1 bi-color (red & green)	
Protection class	IP54	
Technology	125 KHz	13.56 MHz MIFARE
Buzzer	Yes	
Installation type	wall or on column installation	

FAMILY MODELS

Model	Description	Item code
XTRR 125	Proximity 125 KHz	105925
XTRR 1356	Proximity 13.56 MHz MIFARE	105924

ELECTRONIC CONTROL UNITS



Door Controller LAN/
RS485

202323

ACCESSORIES



External tube adapter

401064



High column H1000
(multiple quantity
saleable 2 pcs)

401075



Foundation plate for
column

737100



100 m skein of SPInet
bus cable. Composed of
2 twisted pairs of 0.50
mm2

S-CAVO-BUS

XTRR FLOW

Proximity reader to be integrated into FlowMotion® pedestrian gates

Type of reader

passive proximity

Installation

integrated in the pedestrian gate



- Designed to be integrated inside the shell of FlowMotion® mWing, mTripod, mPost products.



TECHNICAL SPECIFICATIONS

Model	XTRR 125 FLOW	XTRR 1356 FLOW
Operating ambient temperature	-20 ÷ +55°C	
Connection	Bi-directional BUS (for connection to the Door Controller)	
Protection class	IP54	
Technology	125 KHz	13.56 MHz MIFARE
Buzzer	Yes	
Installation type	To be integrated into FlowMotion® pedestrian gates	

Integration of these items is not possible within the mSwing gate, but for these installations they can always be housed within the mPost card reader, or use the 105925 XTRR 125 KHz or 105924 XTRR 13.56 MHz MIFARE wall-mounted proximity readers

FAMILY MODELS

Model	Description	Item code
XTRR 125 FLOW	XTRR 125 KHz PROXIMITY READER FOR FLOWMOTION PEDESTRIAN GATES	403174
XTRR 1356 FLOW	XTRR 13,56 MHz MIFARE PROXIMITY READER FOR FLOWMOTION PEDESTRIAN GATES	403175

ELECTRONIC CONTROL UNITS



EDC door controller
LAN/RS485

202323

ACCESSORIES



100 m skein of SPInet
bus cable. Composed
of 2 twisted pairs of
0.50 mm2

S-CAVO-BUS

XKMR

Compact proximity mullion reader

Type of reader

passive proximity

Installation

mounting



XKMR 125



XKMR 1356

- Small dimensions for mounting on upright / crossbar
- Very high resistance to burglary, extreme temperatures and humidity



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	XKMR 125	XKMR 1356
Enclosure	Polycarbonate	ABS
Operating ambient temperature	-20 ÷ +70°C	-30 ÷ +70°C
Dimensions (LxDxH)	34x20x62 mm	42x22x110 mm
Connection	Wiegand (for connection to the Door Controller)	
Number of high brightness LED	1	2
Protection class	IP65	
Technology	125 KHz	13.56 MHz MIFARE
Buzzer	Yes	
Installation type	on upright or crossbeam	

FAMILY MODELS

Model	Description	Item code
XKMR 125	Passive proximity 125 KHz	105981
XKMR 1356	Passive proximity 13.56 MHz MIFARE	105980

ELECTRONIC CONTROL UNITS



EDC door controller
LAN/RS485

202323

XKPR

Proximity reader with integrated keypad

Type of reader

passive proximity
keyboard

Installation

wall or column



XKPR 125



XKPR 1356

- Suitable for outdoor installations
- Aluminum case, steel keyboard and cover
- Compact, solid, slim: suitable for all architectural contexts



TECHNICAL SPECIFICATIONS

Model	XKPR 125	XKPR 1356
Enclosure	metal	
Operating ambient temperature	-20 °C +55 °C	
Dimensions (LxDxH)	72x28x100 mm	
Connection	Bi-directional BUS (for connection to the Door Controller)	
Number of high brightness LED	1 bi-color (red & green)	
Protection class	IP54	
Technology	125 KHz	13.56 MHz MIFARE
Buzzer	Yes	
Keypad	Metal 12-key keyboard with backlighting	
Installation type	wall or on column installation	

FAMILY MODELS

Model	Description	Item code
XKPR 125	Proximity 125 KHz + Keyboard	105907
XKPR 1356	Mifare proximity 13.56 MHz + Keyboard	105922

ELECTRONIC CONTROL UNITS



Door Controller LAN/
RS485

202323

ACCESSORIES



External tube adapter

401064



High column H1000
(multiple quantity
saleable 2 pcs)

401075



Foundation plate for
column

737100



100 m skein of SPInet
bus cable. Composed of
2 twisted pairs of 0.50
mm2

S-CAVO-BUS

XKPRD

Proximity reader with integrated keypad and display



Type of reader

passive proximity
keyboard

Installation

wall

- Available in 125 KHZ and 13,56 MHz versions
- Also suitable for presence detection (in the double passive antenna version)
- Equipped with a graphic display for displaying date, time and personalized messages



TECHNICAL SPECIFICATIONS

Model	XKPRD 125	XKPRD 125 DA	XKPRD 1356
Enclosure	Plastic		
Operating ambient temperature	-10 ÷ +55°C		
Dimensions (LxDxH)	110x30x195 mm		
Connection	Bi-directional BUS (for connection to the Door Controller)		
Protection class	IP54		
Technology	125 KHz single antenna	125 KHz double antenna	13.56 MHz MIFARE, single antenna
Buzzer	Yes		
Keypad	Plastic capacitive 16-key keyboard with backlighting		
Display	3" graphic		
Installation type	wall		

FAMILY MODELS

Model	Description	Item code
XKPR 125D	Proximity 125 KHz + keyboard + display	103221
XKPR 125D DA	Double proximity 125 KHz + keyboard + display	103222
XKPR 1356D	Proximity 13.56 MHz, MIFARE + keyboard + display	105923

ELECTRONIC CONTROL UNITS



Door Controller LAN/
RS485

202323

ACCESSORIES



XKPRD reader adapter

401006



100 m skein of SPI net
bus cable. Composed of
2 twisted pairs of 0.50
mm2

S-CAVO-BUS

XKCP2

Barcode QR code and proximity reader



Type of reader

barcode
QR code
passive proximity

Installation

wall or column

- Stainless steel container with option for installation outdoors
- Precise image scanning with better reading compared to linear scanners
- Digital imaging technology with no moving parts, which ensures better product reliability
- Optimal performance in reading 1D and 2D codes to improve productivity during data acquisition
- Reading of the bar code from a smartphone



TECHNICAL SPECIFICATIONS

Model	XKCP2 125	XKCP2 1356
Enclosure	Metal	
Dimensions (LxDxH)	86x54,5x200 mm	
Connection	RS 232 and bidirectional BUS (for connection to Door Controller)	
Technology	Barcode / QR Code + proximity 125 KHz	

FAMILY MODELS

Model	Description	Item code
XKCP2 125	Barcode QR code and proximity reader 125 MHz	783310
XKCP2 13.56	Barcode QR code and proximity reader 13.56MHz	783311

ELECTRONIC CONTROL UNITS



Door Controller LAN/
RS485

202323 _____

READERPLATE

License plate reader

Type of reader

License plate
recognition

Installation

on pole or wall or
integrated in column
(I02K)



- Integrated number plate recognition system for the management of vehicle access points
- Works with any type of ambient lighting
- **READERPLATE SERIE DS-TCG**
- Suitable for small/medium sized residential or commercial installations with a small number of transits.
- **READERPLATE 504MP / READERPLATE-706MP**
- Ideal for applications in industrial settings, logistics hubs and for the management of high traffic entrances
- **I02K**
- Freestanding column with integrated ANPR number plate reader. Ideal for accesses with space constraints (e.g. underground car parks)



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	READERPLATE - DS-TCG	READERPLATE-504MP	READERPLATE-706MP	I02K
Power supply voltage	12 VDC, PoE	230 Vca	12 VDC, PoE	12 VDC
Enclosure		Metal		
Dimensions (LxDxH)	145 X 357 X 211 mm	130x410x120 mm	122x470x165 mm	80x63x610mm
Connection		RS 232 per connessione al Door Controller		
Protection class	IP67, IK10		IP66	
Range	up to 8 mt	up to 10 mt	up to 20 mt	up to 4 mt
Recognised number plates	Over 39 different countries		Over 50 different countries	

FAMILY MODELS

Model	Description	Item code
READERPLATE-DS-TCG	DS-TCG405 LICENCE PLATE READING CAMERA	105983
READERPLATE-504MP	LICENCE PLATE READING CAMERA UP TO 10M	READERPLATE-504MP
READERPLATE-706MP	ANPR-OCR LICENCE PLATE READING CAMERA - 20m	READERPLATE-706MP
I02K	ANPR READING PLATES COLUMN 4m	783312

ELECTRONIC CONTROL UNITS



Door Controller LAN/
RS485

202323

ACCESSORIES FOR 704MP / 504 MP SERIE



Support bracket for
wall mounting of
READERPLATE camera

Support bracket
for pole mounting
Ø50mm to Ø140mm
for READERPLATE -
504MP/704MP camera

READERPLATE-STAF-P

READERPLATE-STA-PL

FG1 Single channel
detector

FG2 Two-channel
detector

785529

785527

ACCESSORIES FOR DS-TCG SERIE



DS-TCG Serie camera
wall bracket

Pole adapter Ø67mm
to Ø127mm for
READERPLATE DS-TCG

FG1 Single channel
detector

FG2 Two-channel
detector

12 Vdc - 2A - 24W
power supply

105928

105929

785529

785527

202322

ACCESSORIES FOR I02K SERIE



FG1 Single channel
detector

FG2 Two-channel
detector

12 Vdc - 2A - 24W
power supply

785529

785527

202322

NOTE

For more info about READERPLATE, please contact your local FAAC sales representative

LE-EM-TAST

desk proximity reader



Type of reader

keyboard emulation

Installation

at the counter

- Reader for tag entry in the software archive
- Reading technology 125 KHz Unique or 13.56 MHz MIFARE (1K & 4K, Ultralight, DESFire) reading of UID code only (LE-EM-TAST model only)



TECHNICAL SPECIFICATIONS

Model	LE-EM-TAST
Power supply voltage	5 Vdc 150 mA (power supplied directly from the USB interface)
Enclosure	ABS
Operating ambient temperature	0°C +50°C
Dimensions (LxDxH)	42x120x86 mm
Technology	125 KHz Unique / 13.56MHz MIFARE (1K & 4K, Ultralight, DESFire) reading of the UID code only
Weight	115g
PC connection	Direct with USB
Operation	With keyboard emulation

FAMILY MODELS

Model	Description	Item code
LE-EM-TAST	Dual-technology proximity reader 125KHz Unique + 13.56 MHz MIFARE	LE-EMTAST

FG1 - FG2

Metallic mass detectors

System type

Pulse generators for
special applications



- Inductive vehicle detection system
- Suitable for controlling barriers, gates and access control systems
- Relay outputs with clean contacts
- Identification of presence or position
- Fastening on DIN rail



TECHNICAL SPECIFICATIONS

Model	FG1	FG2
Number of connectable turns	1	2
Power supply voltage	24V $\overline{\text{---}}$ - 24V~	
Contact ratings	250 mA / 24V $\overline{\text{---}}$	
Sensitivity levels independent from loop inductance	4	
Installation type	On DIN guide	
Operating ambient temperature	-20°C ÷ +55°C	

FAMILY MODELS

Model	Description	Item code
FG1 single channel	Metallic mass detectors	785529
FG2 two-channels		785527

SPEN

868 UHF tag reader for vehicle access control



Type of reader

Distance detection

Installation

wall or pole

- Designed to identify vehicles equipped with passive TAG.
- Maximum distance recognition 6mt
- Bracket for pole or wall mounting included.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	SPEN
Control units	max. 6 m (default 100%) modifiable to 30%, 60%, 100% with configuration card (accessory)
TAG reading	Passive UHF
Structure	in aluminium on jointed support
Installation type	on wall or post
Material	ABS and polycarbonate (ABS-PC) / Aluminium
Dimensions (LxDxH)	230x35x183 mm
Reading range	max distance 7 m
Absorbed current	900 mA (12 VDC)
Protection class	IP 65
Vandalism protection rate	IK10
Operating ambient temperature	-30°C ÷ +60°C
Interface	Magnetic Stripe
Maximum distance from the door controller	50 m

FAMILY MODELS

Model	Description	Item code
SPEN	UHF Vehicular tag reader	103190

ELECTRONIC CONTROL UNITS



EDC door controller
LAN/RS485

202323

ACCESSORIES



FG1 Single channel
detector

785529



FG2 Two-channel
detector

785527



12 Vdc - 2A - 24W
power supply

202322



Wall and Pole Brackets
for SPEN Reader

103191



Remote reading
configuration card

103192

PASSIVE TRANSPONDERS



Tag windscreen sticker

786393

AT-8

Long-range vehicle reader



Type of reader

vehicular long-range

Installation

on a pole

- Directional reading lobe for perfect circumscription of the identification area
- Recommended for monitoring a fleet of vehicles with the option of identifying the vehicle and the driver in combination (only with 7863267 + proximity card)



TECHNICAL SPECIFICATIONS

Model	AT8
Power supply voltage	230 Vca
Transponder power supply	Lithium battery with a duration of approx. 5 years
Enclosure	ABS
Operating ambient temperature	-30°C ÷ +60°C
Dimensions (LxDxH)	310x100x250 mm
Connection	Magnetic Stripe
Protection class	IP66
Technology	2,4 GHz
Range	max distance 15 m
Maximum vehicle speed to be detected	200km/h
Offset frequency	Multichannel (allows multiple readers to work nearby without interfering with each other)

FAMILY MODELS

Model	Description	Item code
AT-8	AT-8 Long-range vehicle reader	1030537

ELECTRONIC CONTROL UNITS



Door Controller LAN/
RS485

202323

ACCESSORIES



FG1 Single channel
detector

785529



FG2 Two-channel
detector

785527



Support post for AT4
and AT4 868

722233



Enclosure mod. E for
electronic control units

720119

BADGES / CARDS / TRASPONDERS



Active vehicle identification transponder,
integrated lithium battery, complete with suction
cup for attachment to windscreen.

786341

Vehicular column with card
management

Type of reader

Passive proximity



- Available in a single-level version for cars and a double-level version for cars and trucks
- Provided with an intercom with call button, speaker and microphone
- Temperature control with heater and fan
- Complete with a dual-channel Door Controller and Detector monitoring unit for magnetic loops



TECHNICAL SPECIFICATIONS

Model	VT 125	VT 1356	VT 125 H	VT 1356 H
Display	5.1" Monochromatic Graphic			
Card technology	Proximity 125Khz Unique, 13.56Mhz MIFARE			
Control units	Including a dual-channel Door Controller and Detector			
Connection	LAN Ethernet			
Temperature control	Heater and fan unit controlled from the thermostat			
Max absorbed power	20W / 420W with heater			
Absorbed current	0.2A / 1.9A with heater			
Designed for use with an intercom	Call button, speaker and microphone			
Operating temperature	-20°C÷+55°C			
Protection class	IP 44			
Dimensions (LxDxH)	280x450x1300		280x450x2050	
Weight	40 Kg		67 Kg	
Material type	RAL 7021 coated 430-grade stainless steel structure			

FAMILY MODELS

Model	Description	Item code
VT 125	VEHICULAR PROXIMITY READER 125KHz	103347
VT 1356	VEHICULAR PROXIMITY READER 13,56MHz	103348
VT 125 H	VEHICULAR PROXIMITY READER 125KHz - Double Level	103349
VT 1356 H	VEHICULAR PROXIMITY READER 13,56MHz - Double Level	103350

ACCESSORIES



Column base plate

40.G00079



Coated 200 mm column
insert

45.G00038

VTDT/VRTT

Vehicular column with card and ticket management

Type of reader

Passive proximity
QRcode
Barcode



- Available in a single-level version for cars and a double-level version for cars and trucks
- Provided with an intercom with call button, speaker and microphone
- Temperature control with heater and fan
- Complete with a dual-channel Door Controller and Detector monitoring unit for magnetic loops

TECHNICAL SPECIFICATIONS

Model	VTDT 125	VTDT 1356	VRTT 125	VRTT 1356	VTDT 125 H	VTDT 1356 H	VRTT 125 H	VRTT 1356 H
Display	5.1" Monochromatic Graphic							
Card technology	Proximity 125Khz Unique, 13.56Mhz MIFARE							
Ticket technology	Thermal printer for barcode or QRcode ticket issuance		Optical scanner for QR code ticket reading		Thermal printer for barcode or QRcode ticket issuance		Optical scanner for QR code ticket reading	
Control units	Including a dual-channel Door Controller and Detector							
Connection	LAN Ethernet							
Temperature control	Heater and fan unit controlled from the thermostat							
Max absorbed power	20W / 420W with heater							
Absorbed current	0.2A / 1.9A with heater							
Designed for use with an intercom	Call button, speaker and microphone							
Operating temperature	-20°C÷+55°C							
Protection class	IP 44							
Dimensions (LxDxH)	280x450x1300 mm				280x450x2050 mm			
Weight	40 Kg				67 Kg			
Material type	RAL 7021 coated 430-grade stainless steel structure							

FAMILY MODELS

Model	Description	Item code
VTDT 125	Ticket Dispenser + 125KHz reader	103339
VRT 125	Ticket Reader + 125KHz reader	103340
VTDT 1356	Ticket Dispenser + 13,56MHz Tag Reader	103341
VRT 1356	Ticket Reader + 13,56MHz Reader	103342
VTDT 125 H	Ticket Dispenser + 125KHz reader - Double Level	103343
VRT 125 H	Ticket Reader + 125KHz Reader - Double Level	103344
VTDT 1356 H	Ticket Dispenser + 13,56MHz Reader - Double Level	103345
VRT 1356 H	Ticket Reader + 13,56MHz Reader - Double Level	103346

ACCESSORIES



Column base plate

40.G00079



Coated 200 mm column insert

45.G00038

Roll of 140g thermal paper (270 diameter)
Max 4500 tickets

930048

Roll of 80g thermal paper (270 diameter)
Max 9000 tickets

930049

VT FULL

Vehicle column with ticket, card and QR code management

Type of reader

- Passive proximity
- QRcode
- Barcode



- Available in a single-level version for cars and a double-level version for cars and trucks
- Provided with an intercom with call button, speaker and microphone
- Temperature control with heater and fan
- Complete with a dual-channel Door Controller and Detector monitoring unit for magnetic loops



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	VT FULL 125	VT FULL 13.56	VT FULL 125 2H	VT FULL 13.56 2H
Display	5.1" Monochromatic Graphic			
Card technology	Proximity 125KHz Unique	Proximity 13,56MHz MIFARE	Proximity 125KHz Unique	Proximity 13,56MHz MIFARE
Ticket technology	Thermal printer for issuing barcode or Qrcode tickets + Optical scanner for Qrcode ticket reading			
Control units	Including a dual-channel Door Controller and Detector			
Connection	LAN Ethernet			
Temperature control	Heater and fan unit controlled from the thermostat			
Max absorbed power	20W / 420W with heater			
Absorbed current	0.2A / 1.9A with heater			
Designed for use with an intercom	Call button, speaker and microphone			
Operating temperature	-20°C÷+55°C			
Protection class	IP 44			
Dimensions (LxDxH)	280x450x1300 mm		280x450x2050 mm	
Weight	40 Kg		67 Kg	
Material type	RAL 7021 coated 430-grade stainless steel structure			

FAMILY MODELS

Model	Description	Item code
VT FULL 125	Ticket Reader + Dispenser + Reader 125KHz	103351
VT FULL 13.56	Ticket Reader + Dispenser + Reader 13,56MHz	103352
VT FULL 125 2H	Ticket Reader + Dispenser + Reader 125KHz - Double Level	103353
VT FULL 13.56 2H	Ticket Reader + Dispenser + Reader 13,56MHz - Double Level	103354

ACCESSORIES



Column base plate

40.G00079



Coated 200 mm column insert

45.G00038

Roll of 140g thermal paper (270 diameter)
Max 4500 tickets

930048

Roll of 80g thermal paper (270 diameter)
Max 9000 tickets

930049

ST-STA-AUT

Desk ticket printer



- Desktop printer for ticket/receipt issuance
- Can be connected to a PC via USB connection



TECHNICAL SPECIFICATIONS

Model	ST-STA-AUT
PC connection	USB
Printer	Thermal printer with cutter

FAMILY MODELS

Model	Description	Item code
ST-STA-AUT	Tabletop ticket printer with automatic cutter	ST-STA-AUT

ACCESSORIES

Pack of 4 rolls of thermal paper 60 x 80 mm. 60 gr/m2 for ST-STA-AUT desktop printer

TICKET-60X80-G60

Traffic light

LED traffic light



FAMILY MODELS

Model	Item code
Traffic light with 2 LED lights (red and green)	103177

ACCESSORIES

Support pole for traffic
lights - Ø 60 mm H
2.50m

103182

Fixing bracket for
mounting traffic lights
on poles. For poles Ø
45-60 mm.

103174

Fixing bracket for
traffic light wall
mounting

103169

CARDS AND TRANSPONDERS

Magnetic card



Proximity card



Proximity +
magnetic card



Key-chain format
proximity tag



Proximity tag
watch format



- Magnetic, proximity cards, and proximity cards with magnetic stripe, key-chain or watch transponder
- Can be customized using printing procedures suitable to the number of items requested
- The cards are made of recycled PVC

MAGNETIC CARDS

Model	Description	Item code	package
Card format	Blank standard ISO card with high-coercivity magnetic stripe	786322	10 pcs.
Card format	125 KHz standard Unique ISO passive proximity card with high-coercivity magnetic stripe, programmed and numbered	786380	10 pcs.
Card format	125 KHz standard Unique ISO passive proximity card with high-coercivity magnetic stripe, programmed and numbered, with color printing on card front side	786381	10 pcs.

RFID 125 KHZ TRANSPONDER

Model	Description	Item code	package
Card format	125 KHz passive proximity card, standard blank Unique ISO card	786335	10 pcs.
Card format	125 KHz passive proximity card, standard Unique ISO card, numbered	786377	10 pcs.
Card format	125 KHz passive proximity card, standard Unique ISO card, numbered, with color printing on card front side	786378	10 pcs.
Card format	Passive proximity card 125 KHz Unique ISO standard neutral	786335	10 pcs.
Card format	Passive proximity card 125 KHz Unique ISO standard with FAAC logo, numbered in colour	786378	10 pcs.
Card format	125 KHz standard blank Unique ISO passive proximity card with high-coercivity magnetic stripe	786322	10 pcs.
Card format	125 KHz standard Unique ISO passive proximity card with high-coercivity magnetic stripe, programmed and numbered	786380	10 pcs.
Card format	125 KHz standard Unique ISO passive proximity card with high-coercivity magnetic stripe, programmed and numbered, with color printing on card front side	786381	10 pcs.
Key-chain format	Passive proximity transponder 125 KHz key-chain format	786323	10 pcs.
Watch format	Passive proximity transponder 125 KHz watch format	786373	10 pcs.

CARDS AND TRANSPONDERS

TRANSPONDER MIFARE 13,56 MHZ

Model	Description	Item code	package
Card format	MIFARE Classic passive proximity card 1Kbyte ISO14443A neutral ISO standard	786356	10 pcs.
Card format	MIFARE Classic passive proximity card 1Kbyte ISO14443A ISO standard, numbered	786354	10 pcs.
Card format	MIFARE Classic passive proximity card 1Kbyte ISO14443A ISO standard, numbered, with color printing on card front side	786355	10 pcs.
Key-chain format	MIFARE Classic passive proximity card 1Kbyte ISO14443A key-chain format	786374	10 pcs.
Card format	MIFARE Classic passive proximity card 1Kbyte ISO14443A neutral ISO standard with high- coercivity magnetic stripe	786356	10 pcs.
Card format	MIFARE Classic passive proximity card 1Kbyte ISO14443A ISO standard with high-coercivity magnetic stripe, programmed and numbered	786357	10 pcs.
Card format	Dual-technology passive proximity card 125 KHz + MIFARE 1Kbyte ISO 14443A, neutral	786359	10 pcs.
Card format	Dual-technology passive proximity card 125 KHz + MIFARE 1Kbyte ISO 14443A, numbered	786360	10 pcs.
Card format	Dual-technology passive proximity card 125 KHz + MIFARE 1Kbyte ISO 14443A, numbered, with color printing on card front side	786361	10 pcs.

FAAC PROPRIETARY TRANSPONDERS WITH UNIQUE CODE

Card format	13.56MHz TAG with unique numbering and silkscreen printing with FAAC logo	786384	10 pcs
Card format	13.56MHz TAG with unique numbering and customised customer logo silkscreen printing	786385	10 pcs
Key-chain format	125KHz TAG with unique numbering and silkscreen printing with FAAC logo	786386	10 pcs
Key-chain format	13.56MHz TAG with unique numbering and silkscreen printing with FAAC logo	786387	10 pcs

With the FAAC encrypted TAGs in the Mifare 13.56MHz version, the security level relating to clonability is increased since the 'public' UID of the TAG is not used, but a code, derived from a proprietary algorithm, is recorded in its internal memory, access to which is only permitted via a private key defined in the KEYDOM system. This solution makes it possible to meet the needs of customers who require a high level of security while guaranteeing the uniqueness of the ID. FAAC coded TAGs, both 125KHz and Mifare 13.56 MHz, also offer greater convenience in entering the KEYDOM archive by simply typing the number printed on the TAG, thus avoiding the need for self-reading.



ORDER FORM FOR NUMBERED CARDS

GENERAL INFO FOR THE PURCHASE ORDER

Client:	PO number:
Delivery address:	Requested delivery date

CARDS PART NUMBER

QTY	DESCRIPTION	CODE
	Neutral proximity cards 125 KHz	786335
	Neutral numbered proximity card 125 KHz	786377
	Numbered proximity card 125 KHz - printed in color on the front side	786378
	Neutral proximity card 125 KHz with magnetic stripe	786322
	Neutral numbered proximity card 125 KHz with programmed magnetic stripe	786380
	Neutral numbered proximity card 125 KHz with programmed magnetic stripe and printed in color on the front side	786381
	Proximity key fob 125 KHz	786323
	Proximity bracelet 125 KHz watch type.	786373
	Neutral numbered proximity card 13.56 MIFARE Classic 1Kbyte ISO14443A	786354
	Numbered proximity card 13.56 MIFARE Classic 1Kbyte ISO14443A - printed in color on the front side	786355
	Proximity key fob 13.56 MIFARE Classic 1Kbyte ISO14443A	786374
	Neutral proximity card 13.56 MIFARE Classic 1Kbyte ISO14443A with magnetic stripe	786356
	Neutral numbered proximity card 13.56 MIFARE Classic 1Kbyte ISO14443A with programmed magnetic stripe	786357
	Neutral proximity cards 125 KHz + 13.56 MHz MIFARE 1Kbyte ISO 14443A	786359
	Neutral numbered proximity card 125 KHz + 13.56 MHz MIFARE 1Kbyte ISO 14443A	786360
	Numbered proximity card 125 KHz + 13.56 MHz MIFARE 1Kbyte ISO 14443A - printed in color on the front side	786361

CARDS PERSONALIZATION - Please flag the personalization required

	QTY	DESCRIPTION
☐		NUMBERED FROM TO
☐		INSTALLATION REFERENCE (for Magnetic Cards only)
☐		LOGO PERSONALIZATION Please send also: 1) File from 600 to 800 dpi 2) Vectorial format file .ai .pdf or .eps 3) In case of Vectorial format file, please communicate all colours needed.

ENTERPRISE

Keydom Software for physical and virtual X64 server architectures



- **WEB BASED:** The entirely web-based software structure means that just one device, even mobile, and a web browser are all you need to access and manage the KEYDOM system.
- **USER FRIENDLY:** You do not need to be an expert in order to configure the system, simply follow the instructions in clear and complete system screens
- **READY TO BE INTEGRATED:** The KEYDOM system has been created to be integrated with other systems and technologies to provide maximum security and performance
- **MULTISITE FUNCTION:** allows to apply a central access policy to several sites (buildings) of the same organization.

TECHNICAL SPECIFICATIONS

Model	Enterprise	Enterprise-Lite
Operating system	Microsoft Windows 10 or later / Windows Server 2012-R2 or later	
Virtual machine	VMware/VirtualBox	
User management	Up to 500.000	
Door Controller Management	Up to 4.096	Up to 72

FAMILY MODELS

Model	Description	Item code
ENTERPRISE	Enterprise Software Keydom for architecture Server X64	779089
ENTERPRISE-LITE	Keydom Enterprise-Lite software for X64 server architecture max.72 D.C.	779090

NOTE: option to complete remote and on-site start-up for a fee; for specific sales offer, contact your local FAAC sales representative.



JCALL System

Entrance control via telephone



- Just a simple and free of charge ring of a mobile phone to open an entrance.
- The system can be easily installed with any other traditional existing system.
- Easy to install: no structural wiring, programmable via PC or SMS.

TECHNICAL SPECIFICATIONS

JCALL CONTROL UNIT

Operating ambient temperature	-30°C to +70°C
Power supply voltage	12V
Average energy consumption	At rest: 90 mA. During calls: 150 mA. During GPRS connection: 300 mA
Exit port for programming and monitoring from PC	Mini-USB Serial port type B
Main control unit number of inputs/outputs	4 digital inputs, 2 relay outputs
Max. no. of outputs using the expansion card	Up to 10 relay outputs
Frequency band	Quadri-band GSM 850/900/1800/1900MHz
GSM Network	2G (SIM with 3G or 4G service only are not compatible)
Control unit dimensions	136 x 108 x 30 mm
Control unit approx. Weight	100g
Maximum applicable voltage at the OUT terminals	24 VAC/VDC
Maximum applicable current at the OUT terminals	1 A
Max. available current for peripheral devices	240 mA@12V, 500mA@5V

JCALL SYSTEM FUNCTIONAL SPECIFICATIONS

JCALL Control unit	up to 10 passageways and access for differentiated groups of users
Number of users managed	Up to 2000, which can be organised into groups with different access permissions
Expiry date control	For groups and for single users
Time slots	Up to 4 time slots a day
Access permissions	Time slots, days of week, months of year
Programming	from PC, via SMS and via internet (via GPRS).
Access log	Last 30 days

POWER SUPPLY UNIT

Input voltage	88-264VAC /47-63Hz
Input current	400 mA@230VAC
Output voltage	12V DC
Output current	2.1 A
Type of power supply	Stabilised switching
Sizing of power supply	78 x 51 x 28 mm
Power supply approx. weight	200 g

GSM ANTENNA

Connector	SMA, UFL
SMA Antenna cable length	3 m
SMA Antenna fixing	Magnetic
SMA Antenna height	7 cm

FAMILY MODELS

Model	Description	Item code
JCALL standard	Standard JCALL Kit	102604

ACCESSORIES



New expansion circuit
for JCALL

490202

Enclosure mod. E for
electronic control units

720119

TRAFFIC BOLLARDS

FAAC J Series bollards

FAAC SOLUTIONS FOR REGULATING VEHICLE TRAFFIC IN RESIDENTIAL, COMMERCIAL, INDUSTRIAL AND CITY AREAS WITH LIMITED TRAFFIC AND FOR SECURITY APPLICATIONS IN PERIMETER PROTECTION.

Application sector	Line	Type	Model
to close off and regulate vehicular access to RESIDENTIAL AREAS (Moderate vehicular flow)	J200	(HA) Automatic	J200 HA
		(SA) Semi-Automatic	J200 SA
		(F) Fixed	J200 F
to close off and regulate vehicular access to COMMERCIAL, INDUSTRIAL AND URBAN RESTRICTED ACCESS AREAS (Intense vehicular flow)	J275	(HA) Automatic	J275 V2 HA
		(SA) Semi-Automatic	J275 SA
		(F) Fixed	J275 F
perimeter protection and regulation of vehicular access to RESTRICTED AREAS WITH SPECIAL SECURITY REQUIREMENTS	J275 2K20	(HA) Automatic	J275 2K20 HA
		(F) Fixed	J275 2K20 F
	JS48	(HA) Automatic	JS48 HA
		(HA EFO) Automatic Emergency Fast Operation	JS48 HA EFO
		(R) Removable	JS48 R
	JS80	(HA) Automatic	JS80HA
		(HA EFO) Automatic Emergency Fast Operation	JS80 HA EFO
		(R) Removable	JS80 R
		(F) Fixed	JS80 F

- (HA) Automatic:** Retractable bollard operated by electronic control unit
- (HA EFO) Automatic Emergency Fast Operation:** Retractable bollard operated by electronic control unit with rapid rising security option
- (SA) Semi-Automatic:** Retractable bollard operated by a gas spring. No electrical connection required
- (R) Removable:** Fixed non-retractable bollard with a cylinder that can be removed to allow temporary access
- (F) Fixed:** Fixed non-retractable bollard



J200 HA

Retractable bollard



Type of operator

Hydraulic Automatic

Height

600 mm

- Easy to ship, stock and install thanks to the low weight of the product.
- Streamlined product, it can be configured by selecting the desired installation accessories.
- Easy maintenance (can be performed by a single person)
- Simplified placement thanks to the self-supporting structure which does not require a pit.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J200 HA H600	J200 HA H600 Stainless steel
Type of operator	Hydraulic operator	
Cylinder height from ground	600 mm	
Cylinder diameter	200 mm	
Cylinder treatment	Cataphoresis and polyester powder paint, dark grey metallised RAL 7021	Satin finish
Reflective strip height	25 mm	
Standard reflecting strip colour	Orange	
Rising time	~5 s (*)	
Descent time	~7 s (*)	
Emergency descent device	YES (optional)	
Emergency descent time	~7 s (*)	
Rising obstacle detection device	YES (optional)	
Release device	YES	
Power supply voltage	220-240V ~ 50/60Hz	
Max. power	230 W (*)	
Hydraulic pump unit protection class	IP67	
Type of use	Use in residential areas	
Operating ambient temperature	-15°C / +55°C	
Operating ambient temperature with heater	-25°C / +55°C	
Load class (EN 124)	C250 (25t)	
Total weight	90 Kg	

(*) data referred to 230V~ 50Hz

PAINTED STEEL FAMILY MODELS

Model	Item code
J200 HA H600	116500

PACKS

- J200 HA is equipped with:**
- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering (1 pc)
 - support structure to be cemented with cataphoresis treatment (pit not required)

INOX AISI 316L FAMILY MODELS

Model	Item code
J200 HA H600 Stainless steel	116505

PACKS

- J200 HA INOX is equipped with:**
- AISI 316L satin-finished stainless steel cylinder
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering (1 pc)
 - support structure to be cemented with cataphoresis treatment (pit not required)

ELECTRONIC CONTROL UNITS



JE control unit*
Info at page 158

117300

OPTIONAL ACCESSORIES



Pit heater

117906



Solenoid valve and
pressure switch kit for
J200 HA

116502



LED lights kit J200

116504

>>



Acoustic buzzer J200
HA

116503

NOTE

- ◆ Management up to max 3 bollards J200 HA



J200 SA

Retractable bollard



Type of operator

Semiautomatic

Height

600 mm

- Power supply and wiring not requested
- Kept lock in low position (against accidental release).
- Simple and safe movements thanks to the dedicated release key
- Simplified placement thanks to the self-supporting structure which does not require a pit.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J200 SA H600	J200 SA H600 Stainless steel
Type of operator	Single-acting gas operator	
Cylinder height from ground	600 mm	
Cylinder diameter	200 mm	
Cylinder material	S235JRG2 EN 10277 steel	AISI 316L satin finish
Cylinder treatment	Cataphoresis and polyester powder paint, dark grey metallised RAL 7021	Satin finish
Release device	Key operated (supplied)	
Reflective strip height	25 mm	
Standard reflecting strip colour	Orange	
Total weight	82 Kg	
Walled in pit with cylinder profile (LxWxH)	400 x 500 x 800 mm	
Excavation dimensions (LxWxH)	700 x 700 x 1.100 mm	
Load class (EN 124)	C250	

PAINTED STEEL FAMILY MODELS

Model	Item code
J200 SA H600	116508

PACKS

- J200 SA is equipped with:**
- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting
 - support structure to be cemented with cataphoresis treatment (pit not required)
 - Release key (1 pc)

INOX AISI 316L FAMILY MODELS

Model	Item code
J200 SA H600 Stainless steel	116509

PACKS

- J200 SA INOX is equipped with:**
- AISI 316L satin-finished stainless steel cylinder
 - support structure to be cemented with cataphoresis treatment (pit not required)
 - Release key (1 pc)

OPTIONAL ACCESSORIES



LED lights kit J200 ♦

116504



Release keys kit (5 keys)

390084

NOTE

♦ The power supply unit (24 V) and the cable (2x1.5 mm) for the flashing light are not supplied.

J200 F

Fixed bollard



Type of operator

Fixed

Height

600 mm

- Power supply and wiring not requested
- Simple laying and limited excavation
- Guarantees aesthetic coherency in multiple installations together with retractable bollards.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J200 F H600	J200 F H600 Stainless steel
Cylinder height from ground	600 mm	
Cylinder diameter	200 mm	
Cylinder treatment	Cataphoresis and polyester powder paint, dark grey metallised RAL 7021	Satin finish
Reflective strip height	25 mm	
Standard reflecting strip colour	Orange	
Total weight	35 Kg	

PAINTED STEEL FAMILY MODELS

Model	Item code
J200 F H600	116506

PACKS

J200 F is equipped with:

- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting

INOX AISI 316L FAMILY MODELS

Model	Item code
J200 F H600 Stainless steel	116507

PACKS

J200 F INOX is equipped with:

- AISI 316L satin-finished stainless steel cylinder

OPTIONAL ACCESSORIES



LED lights kit J200 ♦

116504

NOTE

- ♦ The power supply unit (24 V) and the cable (2x1.5 mm) for the flashing light are not supplied.

J275 HA V2

Retractable traffic bollard



Type of operator

Hydraulic Automatic

Height

600 or 800 mm



- Guaranteed for a high use frequency
- Easy maintenance (can be performed by a single person)
- “Gentle stop” function to assure a gentle stop on the low limit switch



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J275 HA V2 H600	J275 HA V2 H800	J275 HA V2 H600 INOX	J275 HA V2 H800 INOX
Type of operator	Hydraulic operator			
Cylinder height from ground		600 mm		800 mm
Cylinder diameter		275 mm		
Cylinder treatment	Cataphoresis and polyester powder paint, dark grey metallised RAL 7021		Satin finish	
Rising time		~5 s (*)		~7 s (*)
Descent time		~3,5 s (*)		~4,5 s (*)
Emergency descent device		YES (excludable)		
Emergency descent time		~1,2 s (*)		~1,5 s (*)
Rising obstacle detection device		YES		
Release device		YES		
Slow lowering		Yes		
Power supply voltage		220-240V ~ 50/60Hz		
Max. power		575 W (*)		
Hydraulic pump unit protection class	IP67	-		IP67
Type of use		Intensive use (Traffic)		
Impact resistance	38.000 J			67.000 J
Break in resistance	128.000 J			207.000 J
Pit weight		55 Kg		65 Kg
Traffic bollard weight		112 Kg		130 Kg
Load class (EN 124)		C250 (25t)		
Operating ambient temperature		-15°C / +55°C		
Operating ambient temperature with heater		-25°C / +55°C		

(*) data referred to 230V~ 50Hz

PAINTED STEEL FAMILY MODELS

Model	Item code
J275 HA V2 H600	116006
J275 HA V2 H800	116007

PACKS

- J275 HA V2 is equipped with:**
- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - emergency lowering in case of a power cut (can be excluded)
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering

INOX AISI 316L FAMILY MODELS

Model	Item code
J275 HA V2 H600 INOX	116036
J275 HA V2 H800 INOX	116037

PACKS

- J275 HA V2 INOX is equipped with:**
- AISI 316L satin-finished stainless steel cylinder
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - emergency lowering in case of a power cut (can be excluded)
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering

ELECTRONIC CONTROL UNITS



JE control unit*
Info at page 158

117300

INSTALLATION ACCESSORIES



Pit JP275/600 complete
with counter frame
for bollard H600

1161001



JP 275/800 pit
extension for bollard
H800 ♦

OPTIONAL ACCESSORIES



Pit heater JH275 (to
extend operation down
to -25°C)

116200



Pit cover JC275

116201



J275 anti-burglar head
INCLUDING led lights
(no buzzer)

116104

NOTE

- ♦ Management up to max 3 bollards J275 HA
- ♦ Both elements are required for the 800 mm version 1161001 + 1161011

J275 SA

Retractable traffic bollard



Type of operator

Semiautomatic

Height

600 mm



- Power supply and wiring not requested
- Kept lock in low position (against accidental release).
- Simple and safe movements thanks to the dedicated release key



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J275 SA H600	J275 SA H600 Stainless steel
Type of operator	Single-acting gas operator	
Cylinder height from ground	600 mm	
Cylinder diameter	275 mm	
Cylinder treatment	Cataphoresis and polyester powder paint, dark grey metallised RAL 7021	Satin finish
Reflective strip height	55 mm	
Standard reflecting strip colour	Orange	
Release device	Key operated (supplied)	
Impact resistance	38.000 J	67.000 J
Break in resistance	128.000 J	207.000 J
Pit weight	55 Kg	
Traffic bollard weight	70 Kg	
Load class (EN 124)	C250 (25t)	

PAINTED STEEL FAMILY MODELS

Model	Item code
J275 SA H600	116050

PACKS

- J275 SA is equipped with:**
- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting
 - flashing LED lights ring*
 - mechanical lock in raised position with special release key (No. 2 release keys provided)

INOX AISI 316L FAMILY MODELS

Model	Item code
J275 SA H600 Stainless steel	116060

PACKS

- J275 SA INOX is equipped with:**
- AISI 316L satin-finished stainless steel cylinder
 - flashing LED lights ring*
 - mechanical lock in raised position with special release key (No. 2 release keys provided)

INSTALLATION ACCESSORIES



1161001

OPTIONAL ACCESSORIES



Release keys kit (5 keys)

390084



Pit cover JC275

116201

NOTE

(*) The power supply unit (24 V) and the cable (2x1.5 mm) for the flashing light are not supplied.

J275 F

Fixed traffic bollard



Type of operator

Fixed

Height

600 or 800 mm

- Power supply and wiring not requested
- Simple laying and limited excavation
- Guarantees aesthetic coherency in multiple installations together with retractable bollards.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J275 F H600	J275 F H800	J275 F H600 Stainless steel	J275 F H800 Stainless steel
Cylinder height from ground	600 mm	800 mm	600 mm	800 mm
Cylinder diameter	275 mm			
Cylinder treatment	Cataphoresis and polyester powder paint, dark grey metallised RAL 7021			Satin finish
Reflective strip height	55 mm			
Standard reflecting strip colour	Orange			
Break in resistance	128.000 J		207.000 J	
Total weight	34 Kg	38 Kg	34 Kg	38 Kg

PAINTED STEEL FAMILY MODELS

Model	Item code
J275 F H600	116020
J275 F H800	116021

PACKS

J275 F is equipped with:

- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting
- flashing LED lights ring*

INOX AISI 316L FAMILY MODELS

Model	Item code
J275 F H600 Stainless steel	116040
J275 F H800 Stainless steel	116041

PACKS

J275 F INOX is equipped with:

- AISI 316L satin-finished stainless steel cylinder
- flashing LED lights ring*

INSTALLATION ACCESSORIES



Fixed bollard fixing
frame JPF275

OPTIONAL ACCESSORIES



Pit cover JC275

116120

116201

NOTE

(*) The power supply unit (24 V) and the cable (2x1.5 mm) for the flashing light are not supplied.

J275 HA 2K20

Retractable security bollard



Type of operator

Hydraulic Automatic

Height

800 mm

- Performance certified according to PAS 68 and IWA 14-1 standards. Able to withstand impact with a 7500 kg truck driven at 48 km/h in a double unit configuration
- Guaranteed for high frequency use
- Simplified maintenance (possible with just one person)
- Hydraulic control unit integrated in the bollard
- “Gentle stop” function to ensure a gentle stop on the low limit switch
- Anti-tamper head and protected by a security lock with encrypted key to prevent unauthorized lowering



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J275 HA 2K20	J275 HA 2K20 INOX
Type of operator	Hydraulic Unit	
Cylinder height from ground	800 mm	
Cylinder diameter	275 mm	
Cylinder treatment	Cataphoresis and polyester painting	Aisi 316 satin-finish stainless steel
Reflective strip height	55 mm	
Standard reflecting strip colour	White	
Rising time	~8 s	
Descent time	~4,5 s	
Emergency descent device	YES (OPTIONAL)	
Emergency descent time	~2 s	
Rising obstacle detection device	YES (OPTIONAL)	
Release device	yes	
Slow lowering	yes	
Power supply voltage	220-240V - 50/60Hz	
Max. power	575 W (*)	
Hydraulic pump unit protection class	IP67	
Type of use	Perimeter protection	
Break in resistance	673,000 J dual unit	
Pit weight	100 kg	
Traffic bollard weight	170 kg	
Operating ambient temperature	-15°C / +55°C	
Operating ambient temperature with heater	-25°C / +55°C	
Load class (EN 124)	C250 (25t)	

PAINTED STEEL FAMILY MODELS

Model	Item code
J275 HA 2K20	116401

PACKS

- The J275 HA 2K20 comes with:
- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - anti-tampering head with encrypted release key to access the emergency manual lowering device
 - hydraulic lock in raised position (in case of a power cut)

INOX AISI 316L FAMILY MODELS

Model	Item code
J275 HA 2K20 INOX	116431

PACKS

- The J275 HA 2K20 INOX comes with:
- AISI 316L satin-finished stainless steel cylinder
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - anti-tampering head with encrypted release key to access the emergency manual lowering device
 - hydraulic lock in raised position (in case of a power cut)

ELECTRONIC CONTROL UNITS



JE control unit*
Info at page 158

117300



Pit J275 2K20

116140

OPTIONAL ACCESSORIES



Pit heater JH275 (to extend operation down to -25°C)

116200



Pit cover JC275

116201



a J275 HA 2K pressure switch

116210



a J275 HA 2K solenoid valve unit

116211

NOTE

* controls up to three J275 HA 2K20 bollards

J275 F 2K20

Fixed traffic bollard



Type of operator

Fixed

Height

800 mm

- Power supply and wiring not required
- “Shallow Mounted” design: minimum hole depth required
- Visually identical to the retractable (HA) models, making it perfect for mixed installations



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	J275 F 2K20 H800	J275 F 2K20 H800 INOX
Cylinder height from ground	800 mm	
Cylinder diameter	275 mm	
Cylinder treatment	Cataphoresis and polyester painting	Satin finish
Reflective strip height	55 mm	
Standard reflecting strip colour	Yellow	
Break in resistance	656.000 J	
Total weight	156 Kg	

PAINTED STEEL FAMILY MODELS

Model	Item code
J275 F 2K20 H800	116421

PACKS

The J275 F 2K20 comes with:

- steel cylinder with cataphoresis treatment and metallised dark grey powder coated painting
- flashing LED lights ring*

INOX AISI 316L FAMILY MODELS

Model	Item code
J275 F 2K20 H800 INOX	116441

PACKS

The J275 F 2K20 INOX comes with:

- AISI 316L satin-finished stainless steel cylinder
- flashing LED lights ring*

JS-SERIES BOLLARDS

Bollard always just like new

The JS bollards are provided with mDure® protective sleeves, the FAAC system which, unlike other models on the market, allows the bollard to be reconditioned avoiding high disassembly and reassembly costs. **mDure® is a trademark of FAAC. It is an innovative and technological material, designed to last. It has an extremely high mechanical strength and is resistant to shocks, scratches, UV radiation and chemicals, does not pollute and can be recycled.**

Certified resistance

Crash tests passed perfectly: JS bollards are certified to stop a 7,500 kg truck driven at 50 km/h (JS48) and 80 km/h (JS80), certified operation even after impact. Compliant with safety standards:



vimeo.com/faacgroup/js80



vimeo.com/faacgroup/js80-en

Corrosion resistance

Innovative use of Rilsan® anticorrosive polyamide resin which guarantees protection from corrosion, deterioration, weather and chemical agents.

Aesthetic consistency among all FAAC bollards

All JS technology in just 1m in height and 275mm diameter: these are the FAAC safety measures of all bollards, suitable for every architectural context.

Easy maintenance

The arrangement of the components makes maintenance easier. The main components are accessible from above for inspection or replacement without having to remove the bollard from the ground.

Simplified installation

The integrated hydraulic pump unit reduces costs and facilitates installation without having to lay underground hydraulic lines.

The new high-security range

JS bollards consist of a high-strength steel cylinder and interchangeable protective sleeve available in two versions:

mDure® with exclusive FAAC design

mDure® and Aisi 316 satin-finish stainless steel

The JS range includes the following models:

Automatic (HA): retractable bollard operated by FAAC hydraulic power unit. Rise time 6 seconds and descent time 2 seconds.

Automatic EFO (HA EFO): retractable bollard equipped with a system that allows the bollard to rise quickly, in 1.5 seconds, in case of an emergency (Emergency Fast Operation).

Fixed (F): non-retractable bollard.


Removable (R): non-retractable bollard with a cylinder that can be removed to temporarily allow access.

MODEL	SPEED OF VEHICLE THAT CAN BE STOPPED BY THE BOLLARD	
	50 km/h	80 km/h
HA hydraulic, automatic, retractable	JS 48 HA	JS 80 HA
HA hydraulic, automatic, retractable with EFO system	JS 48 HA EFO	JS 80 HA EFO
F fixed		JS 80 F
R removable	JS 48 R	JS 80 R



JS 48 HA

Retractable security bollard

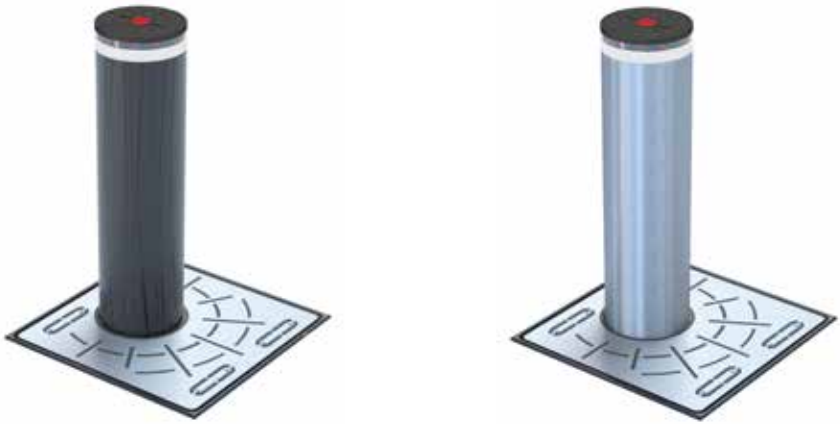

Type of operator

Hydraulic Automatic

Height

1,000 mm

- Maintenance can be carried out without removing the bollard. No lifting equipment required.
- Interchangeable protective sleeve so that the bollard is always just like new.
- Performance certified according to PAS 68; IWA 14-1 and ASTM F2656 standards. Able to withstand impact with a truck driven at 50 km/h. P1 penetration rating, still operational after impact.



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	JS 48 HA	JS 48 HA INOX	JS 48 HA EFO	JS 48 HA EFO INOX
Type of operator			Hydraulic	
Cylinder height from ground			1,000 mm	
Cylinder diameter			275 mm	
Cylinder treatment			Cataphoresis	
Protective sleeve type	mDure®	Aisi 316 stainless steel + mDure®	mDure®	Aisi 316 stainless steel + mDure®
Reflective strip height			55 mm	
Standard reflecting strip colour			White	
Head material type			Aluminum	
Head treatment type			Rilsan® anticorrosive resin	
Rising speed			170 mm/s	
Quick rise device		No		Yes
Rising speed with EFO		-		500 mm/s
Release device			Yes	
Descent speed			250 mm/s	
Power supply voltage			207-243V ~ 50/60 Hz	
Max. power			3.500 W	
Type of use			Perimeter Security	
Break in resistance			673.000 J	
Operating ambient temperature			-15°C ÷ +80°C	
Operating ambient temperature with heater			-40°C ÷ +80°C	
Hydraulic pump unit protection class			IP67	
Load class (EN 124)			C250	
Traffic bollard weight	530 kg			560 kg
Pit weight		200 kg		

MODELS WITH MDURE® PROTECTIVE SLEEVE

Model	Item code
JS 48 HA	117001
JS 48 HA EFO	117051

PACKS

- The JS 48 HA comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve, anthracite, with exclusive FAAC aesthetic finish
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - reflector strip
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering
 - pressure accumulator for fast rise (EFO version only)

MODELS WITH MDURE® AND STAINLESS STEEL PROTECTIVE SLEEVE

Model	Item code
JS 48 HA INOX	117201
JS 48 HA EFO INOX	117251

PACKS

- The JS 48 HA INOX comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve with satin-finish stainless steel
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - reflector strip
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering
 - pressure accumulator for fast rise (EFO version only)

ELECTRONIC CONTROL UNITS



JE control unit♦
Info at page 158

117300


INSTALLATION ACCESSORIES



Pit JS HA


117901

OPTIONAL ACCESSORIES



Pit cover JS

117903



Emergency manual
pump JS HA

117905



Pit heater

117906

NOTE

♦ controls up to one JS 48 HA bollard

JS 48 R

Removable security bollard



Type of operator

Removable

Height

1,000 mm



- Removable cylinder to allow temporary access
- Interchangeable protective sleeve so that the bollard is always just like new.
- Performance certified according to PAS 68; IWA 14-1 and ASTM F2656 standards. Able to withstand impact with a truck driven at 50 km/hr. P1 penetration rating
- “Shallow Mounted” design: minimum hole depth required



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	JS 48 R	JS 48 R INOX
Cylinder height from ground		1,000 mm
Cylinder diameter		275 mm
Cylinder treatment		Cataphoresis
Protective sleeve type	mDure®	Aisi 316 stainless steel + mDure®
Reflective strip height		55 mm
Standard reflecting strip colour		White
Head material type		Aluminum
Head treatment type		Rilsan® anticorrosive resin
Weight of underground base		120 kg
Type of use		Perimeter Security
Break in resistance		673.000 J
Traffic bollard weight		180 kg

MODELS WITH MDURE® PROTECTIVE SLEEVE

Model	Item code
JS 48 R	117111

PACKS

- The JS 48 R comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve, anthracite, with exclusive FAAC aesthetic finish
 - flashing light ring with LED*

MODELS WITH MDURE® AND STAINLESS STEEL PROTECTIVE SLEEVE

Model	Item code
JS 48 R INOX	117301

PACKS

- The JS 48 R INOX comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve with satin-finish stainless steel
 - flashing light ring with LED*

INSTALLATION ACCESSORIES



Underground base JS R/JS F

117902

OPTIONAL ACCESSORIES



Base cover JS R/JS F


117904

NOTE

(*) The power supply unit (24 V) and the cable (2x1.5 mm) for the flashing light are not supplied.

JS 80 HA

Retractable security bollard

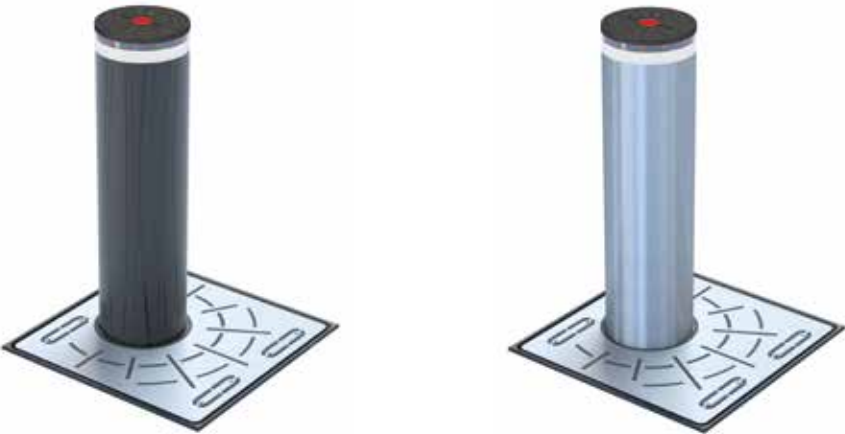

Type of operator

Hydraulic Automatic

Height

1,000 mm

- Maintenance can be carried out without removing the bollard. No lifting equipment required.
- Interchangeable protective sleeve so that the bollard is always just like new.
- Performance certified according to PAS 68; IWA 14-1 and ASTM F2656 standards. Able to withstand impact with a truck driven at 80 km/h. P1 penetration rating, still operational after impact



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	JS 80 HA	JS 80 HA INOX	JS 80 HA EFO	JS 80 HA EFO INOX
Type of operator			Hydraulic	
Cylinder height from ground			1,000 mm	
Cylinder diameter			275 mm	
Cylinder treatment			Cataphoresis	
Protective sleeve type	mDure®	Aisi 316 stainless steel + mDure®	mDure®	Aisi 316 stainless steel + mDure®
Reflective strip height			55 mm	
Standard reflecting strip colour			White	
Head material type			Aluminum	
Head treatment type			Rilsan® anticorrosive resin	
Rising speed			170 mm/s	
Quick rise device		No		Yes
Rising speed with EFO		-		500 mm/s
Release device			Yes	
Descent speed	250 mm/s	-	250 mm/s	-
Power supply voltage			207-243V ~ 50/60 Hz	
Max. power			3.500 W	
Type of use			Perimeter Security	
Break in resistance			1.852.000 J	
Operating ambient temperature	-15°C ÷ +80°C		-15°C / +80°C	

DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	JS 80 HA	JS 80 HA INOX	JS 80 HA EFO	JS 80 HA EFO INOX
Operating ambient temperature with heater	-40°C ÷ +80°C		-40°C / +80°C	
Hydraulic pump unit protection class			IP67	
Load class (EN 124)			C250	
Traffic bollard weight	670 kg		700 kg	
Pit weight			200 kg	

MODELS WITH MDURE® PROTECTIVE SLEEVE

Model	Item code
JS 80 HA	117501
JS 80 HA EFO	117551

PACKS

- The JS 80 HA comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve, anthracite, with exclusive FAAC aesthetic finish
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - reflector strip
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering
 - pressure accumulator for fast rise (EFO version only)

MODELS WITH MDURE® AND STAINLESS STEEL PROTECTIVE SLEEVE

Model	Item code
JS 80 HA INOX	117701
JS 80 HA EFO INOX	117751

PACKS

- The JS 80 HA INOX comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve with satin-finish stainless steel
 - flashing LED lights ring
 - movement signal (acoustic buzzer)
 - reflector strip
 - hydraulic lock in raised position (in case of a power cut)
 - release key for manual emergency lowering
 - pressure accumulator for fast rise (EFO version only)

ELECTRONIC CONTROL UNITS



JE control unit*
Info at page 158

117300


INSTALLATION ACCESSORIES



Pit JS HA

117901

OPTIONAL ACCESSORIES



Pit cover JS

117903



Emergency manual
pump JS HA

117905



Pit heater

117906

NOTE

♦ controls up to one JS 80 HA bollard

JS 80 R

Removable security bollard



Type of operator

Removable

Height

1,000 mm



- Removable cylinder to allow temporary access
- Interchangeable protective sleeve so that the bollard is always just like new.
- Performance certified according to PAS 68; IWA 14-1 and ASTM F2656 standards. Able to withstand impact with a truck driven at 80 km/h. P1 penetration rating
- “Shallow Mounted” design: minimum hole depth required



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	JS 80 R	JS 80 R INOX
Cylinder height from ground		1,000 mm
Cylinder diameter		275 mm
Cylinder treatment		Cataphoresis
Protective sleeve type	mDure®	Aisi 316 stainless steel + mDure®
Reflective strip height		55 mm
Standard reflecting strip colour		White
Head material type		Aluminum
Head treatment type		Rilsan® anticorrosive resin
Weight of underground base		120 kg
Type of use		Perimeter Security
Break in resistance		1.852.000 J
Traffic bollard weight		320 kg

MODELS WITH MDURE® PROTECTIVE SLEEVE

Model	Item code
JS 80 R	117601

PACKS

- The JS 80 R comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve, anthracite, with exclusive FAAC aesthetic finish
 - flashing light ring with LED*
 - reflector strip

MODELS WITH MDURE® AND STAINLESS STEEL PROTECTIVE SLEEVE

Model	Item code
JS 80 R INOX	117801

PACKS

- The JS 80 R INOX comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve with satin-finish stainless steel
 - flashing light ring with LED*
 - reflector strip

INSTALLATION ACCESSORIES



Underground base JS R/JS F

117902

OPTIONAL ACCESSORIES



Base cover JS R/JS F

117904

NOTE

(*) The power supply unit (24 V) and the cable (2x1.5 mm) for the flashing light are not supplied.

JS 80 F

Fixed security bollard



Type of operator

Fixed

Height

1,000 mm



- “Shallow Mounted” design: minimum hole depth required
- Interchangeable protective sleeve so that the bollard is always just like new.
- Performance certified according to PAS 68; IWA 14-1 and ASTM F2656 standards. Able to withstand impact with a truck driven at 80 km/h. P1 penetration rating



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	JS 80 F	JS 80 F INOX
Cylinder height from ground	1,000 mm	
Cylinder diameter	275 mm	
Cylinder treatment	Cataphoresis	
Protective sleeve type	mDure®	Aisi 316 stainless steel + mDure®
Reflective strip height	55 mm	
Standard reflecting strip colour	White	
Head material type	Aluminum	
Head treatment type	Rilsan® anticorrosive resin	
Weight of underground base	120 kg	
Type of use	Perimeter Security	
Break in resistance	1.852.000 J	
Traffic bollard weight	150 kg	

MODELS WITH MDURE® PROTECTIVE SLEEVE

Model	Item code
JS 80 F	117651

PACKS

- The JS 80 F comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve, anthracite, with exclusive FAAC aesthetic finish
 - flashing light ring with LED*
 - reflector strip

MODELS WITH MDURE® AND STAINLESS STEEL PROTECTIVE SLEEVE

Model	Item code
JS 80 F INOX	117851

PACKS

- The JS 80 F INOX comes with:
- steel cylinder with cataphoretic coating
 - mDure® protective sleeve with satin-finish stainless steel
 - flashing light ring with LED*
 - reflector strip

INSTALLATION ACCESSORIES



Underground base JS R/JS F

117902

OPTIONAL ACCESSORIES



Base cover JS R/JS F

117904

NOTE

(*) The power supply unit (24 V) and the cable (2x1.5 mm) for the flashing light are not supplied.

DOORS AND AUTOMATIC ENTRANCES

FAAC automatic entrances are designed to facilitate transit, but not only. They always guarantee minimum encumbrance, extreme silence and maximum adaptability. All FAAC door automations comply with the EN16005 standard and are technologically advanced in terms of safety, energy saving and reduced maintenance costs.



**Discover
some of these
solutions**




For all features of AUTOMATIC DOORS please refer to the AUTOMATIC DOORS AND ENTRANCES catalogue





TYPICAL INSTALLATION EXAMPLES

392 C

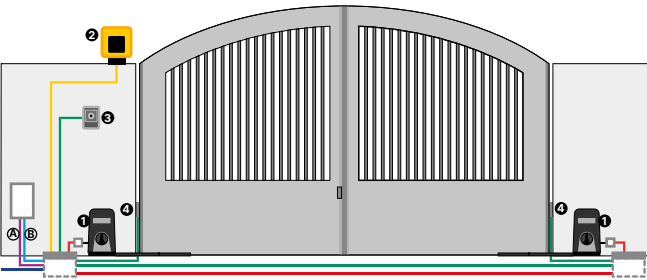

- A Low voltage cabling**

 - 3x0,50 mm² cable
 - 2x0,50 mm² cable
 - 2x2,50 mm² cable
 - 2x1,50 mm² cable
- B Power cabling (230V)**


 - 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	392 C Motor with electronic control unit and articulated arm	104583
1	1	392 Motor without electronic control unit	104584
1	1	XF 433 MHz receiver	787831
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

390 230V

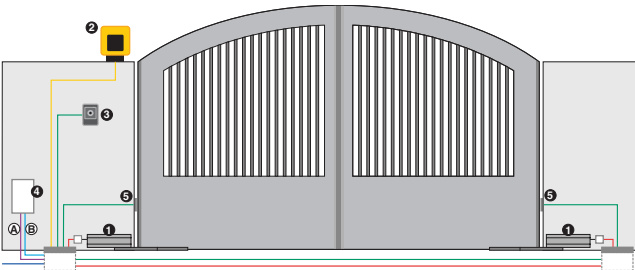

- A Low voltage cabling**

 - 2x0,50 mm² cable
- B Power cabling (230V)**


 - 3x1,50 mm² +T cable
 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	390 230V Operators	104570
1	2	Jointed arm	738705
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

412

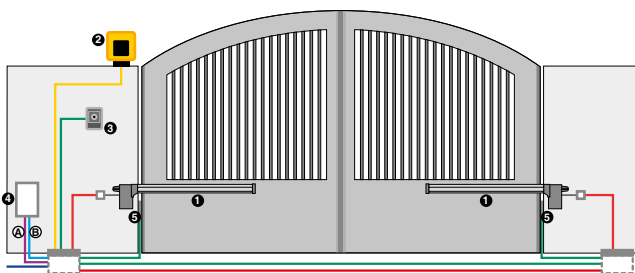

- A Low voltage cabling**

 - 2x0,50 mm² cable
- B Power cabling (230V)**

 - 3x1,50 mm² +T cable
 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	412 RH operator	104470
1	1	412 LH operator	104471
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

Add SAFECODER (code 404041) to ensure complete control of the movement and reverse on obstacle

413 230V

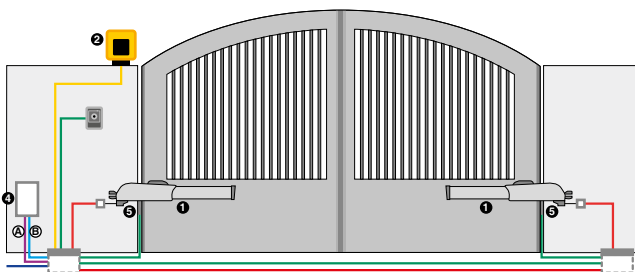

- A Low voltage cabling**

 - 2x0,50 mm² cable
- B Power cabling (230V)**

 - 3x1,50 mm² +T cable
 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	413 Operator	104413
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

Add SAFECODER (code 404040) to ensure complete control of the movement and reverse on obstacle

415 230V

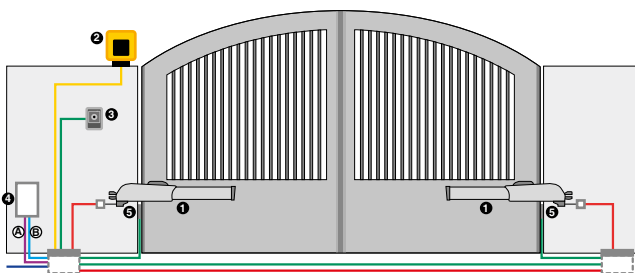

- A Low voltage cabling**

 - 2x0,50 mm² cable
- B Power cabling (230V)**

 - 3x1,50 mm² +T cable
 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	415 Operator	104415
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

Add SAFECODER (code 404040) to ensure complete control of the movement and reverse on obstacle

415 24V

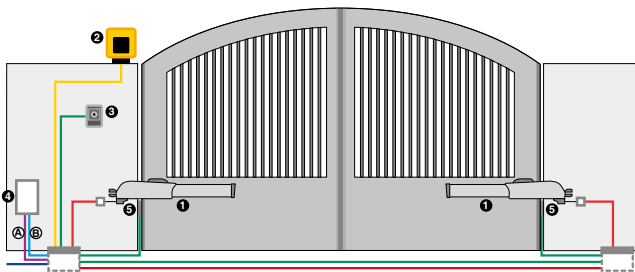

- A Low voltage cabling**

 - 2x0,50 mm² cable
 - 2x1,5 mm² cable
 - 2x2,50 mm² cable
- B Power cabling (230V)**


 - 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	415 Operator	1044151
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E034 Electronic Control Unit	102011
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

S418

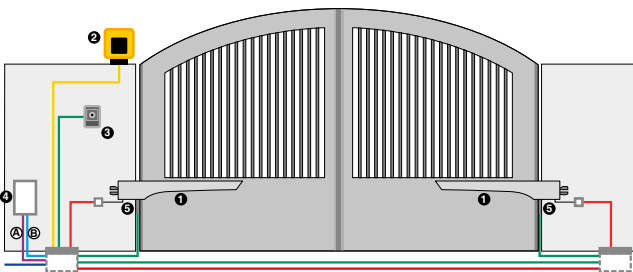

- A Low voltage cabling**


 - 2x0,50 mm² cable
 - 2x1,50 mm² cable
 - 2x2,50 mm² cable
- B Power cabling (230V)**

 - 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	2	24V S418 Operators	104301
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E034 Electronic Control Unit	102011
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

402

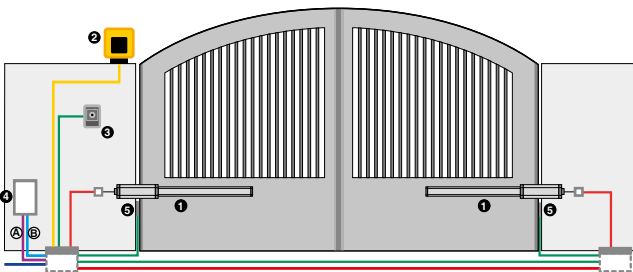

- A Low voltage cabling**

 - 3x0,50 mm² cable
 - 2x0,50 mm² cable
- B Power cabling (230V)**


 - 3x1,5 mm² +T cable
 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	2	402 CBC Operators	104468
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

Add SAFECODER (code 404040) to ensure complete control of the movement and reverse on obstacle

S450H

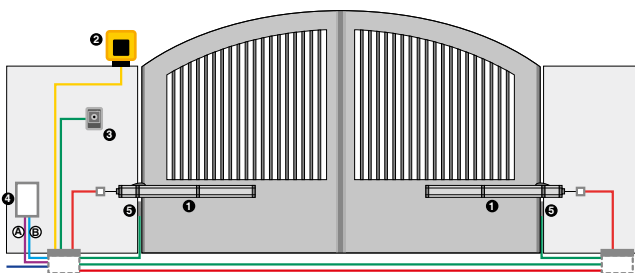

- A Low voltage cabling**

 - 2x0,50 mm² cable
 - 2x0,50 mm² + 2x2,5 mm² cable
 - 2x1,5 mm² cable
- B Power cabling (230V)**


 - 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	S450H CBAC Operators	104100
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E124S Electronic control unit with enclosure	790305
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

422

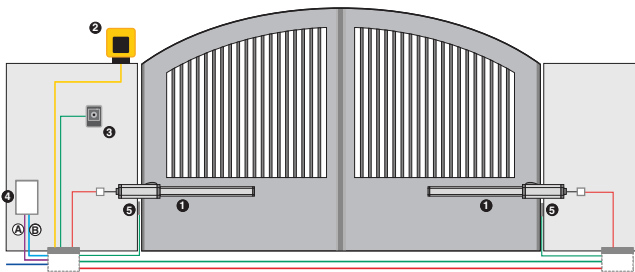

- A Low voltage cabling**

 - 2x0,50 mm² cable
- B Power cabling (230V)**

 - 3x1,50 mm² +T cable
 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	422 CBAC Operators	104200
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

Add SAFECODER (code 404040) to ensure complete control of the movement and reverse on obstacle

400

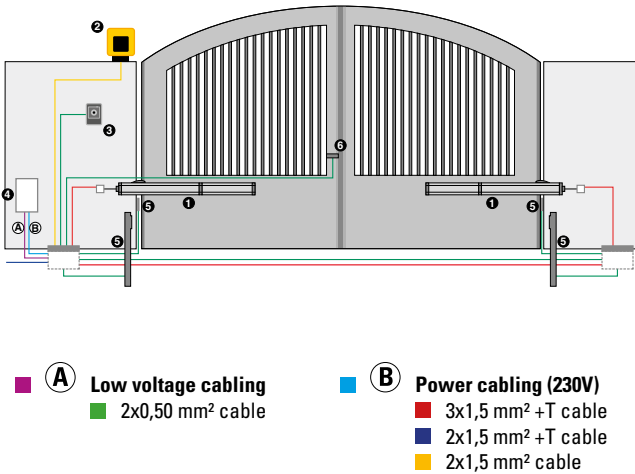


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Add SAFECODER (code 404040) to ensure complete control of the movement and reverse on obstacle

Ref	Q.ty	Description	Code
1	2	400 SBS Operators	104203
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	2	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
5	2	Low column H500 (multiple saleable quantity 2 pcs)	401070
5	2	Foundation plate for column	737100
6	1	12Vac Electric lock complete with floor strike plate	712650
6	1	Internal cylinder with 2 keys	712651001
6	1	External cylinder with 2 keys	712652001
1		XT02 433 2 channel transmitter	787032

770N 230V

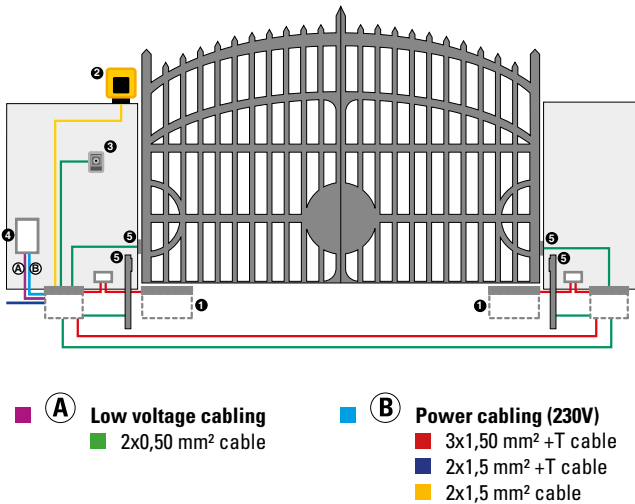


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	770N - 230V Operators	10675201
1	2	Foundation box with release system (Patented)	490065
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	2	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
5	2	Low column H500 (multiple saleable quantity 2 pcs)	401070
5	2	Foundation plate for column	737100
1		XT02 433 2 channel transmitter	787032

Add SAFECODER (code 404035) to ensure complete control of the movement and reverse on obstacle

770N 24V

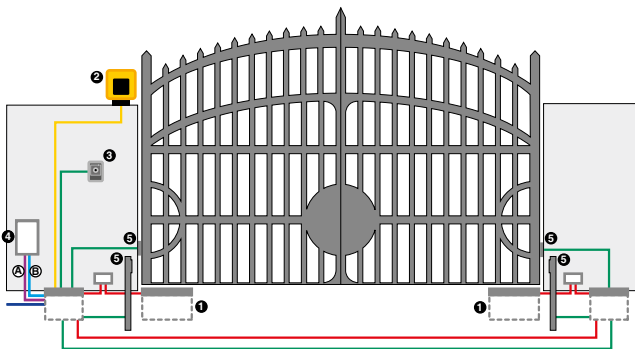


- A Low voltage cabling**
- 2x0,50 mm² cable
 - 2x1,5 mm² cable
 - 2x2,50 mm² cable
- B Power cabling (230V)**
- 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	24V 770N Operators	10675301
1	2	Foundation box with release system (Patented)	490065
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E034 Electronic Control Unit	102011
4	1	XF 433 MHz receiver	787831
5	2	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
5	2	Column (Max H 628 mm)	401039
5	2	Foundation plate for column	737637
1		XT02 433 2 channel transmitter	787032

S800H ENC

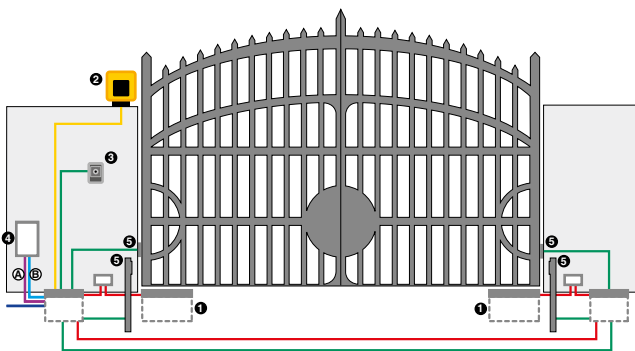


- A Low voltage cabling**
- 2x0,50 mm² cable
 - 2x1,5 mm² cable
 - 2x2,50 + 2x0,50 mm² cable
- B Power cabling (230V)**
- 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	S800H ENC CBAC 100°	108720
1	2	Foundation box	490112
1	2	Hydraulic release device (to be used with the code 390972) for operators CBAC or SBW	390035
1	2	Splined joint group kit for CBAC or SBW operators (to be combined with code 390035)	390972
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E124S Electronic control uni	790305
4	1	XF 433 MHz receiver	787831
5	2	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
5	2	Low column H500 (multiple saleable quantity 2 pcs)	401070
5	2	Foundation plate for column	737100
1		XT02 433 2 channel transmitter	787032

S800 ENC

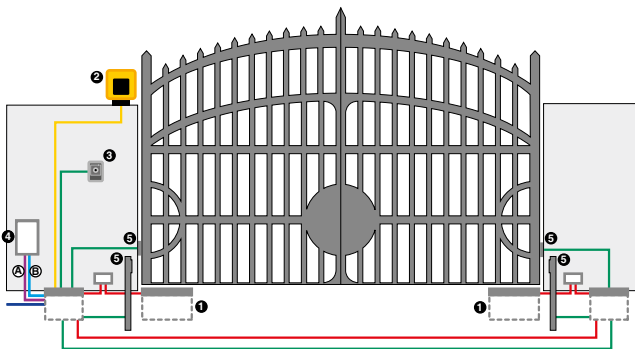

- A Low voltage cabling**

 - 2x0,50 mm² cable
- B Power cabling (230V)**

 - 3x1,50 mm² + 2x0,5 mm² +T cable
 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	2	S800 ENC CBAC 100° 230V	108800
1	2	Foundation box	490112
1	2	Hydraulic release device (to be used with the code 390972) for operators CBAC or SBW	390035
1	2	Splined joint group kit for CBAC or SBW operators (to be combined with code 390035)	390972
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E045S control unit	790077
4	1	Enclosure mod. E for electronic control units	720119
4	1	XF 433 MHz receiver	787831
5	2	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
5	2	Low column H500 (multiple saleable quantity 2 pcs)	401070
5	2	Foundation plate for column	737100
1		XT02 433 2 channel transmitter	787032

S2500I



- A Low voltage cabling**

 - 2x0,50 mm² cable
 - 2x2,50 mm² cable
 - 2x1,50 mm² cable
- B Power cabling (230V)**


 - 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
4	2	24V Electromechanical operator	104250
3	2	Hinge S2500I	490250
3	2	Cover S2500I RAL 7021	416250
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	E034 Electronic Control Unit	102011
4	1	XF 433 MHz receiver	787831
5	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

C4000I

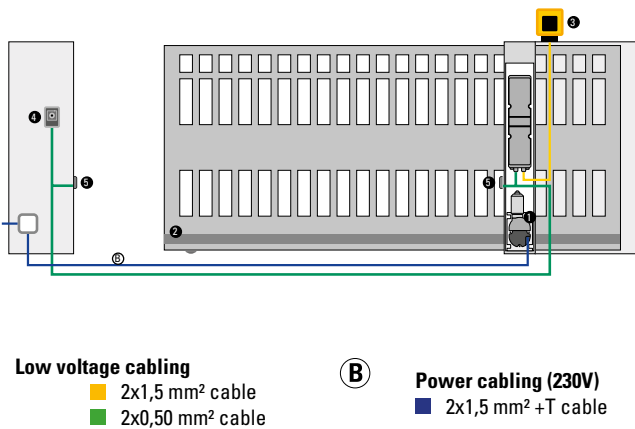


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	C4000I gear motor with built-in board	109001
1	4	30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each)	490333
1	1	XF 433 MHz receiver	787831
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032

740 C

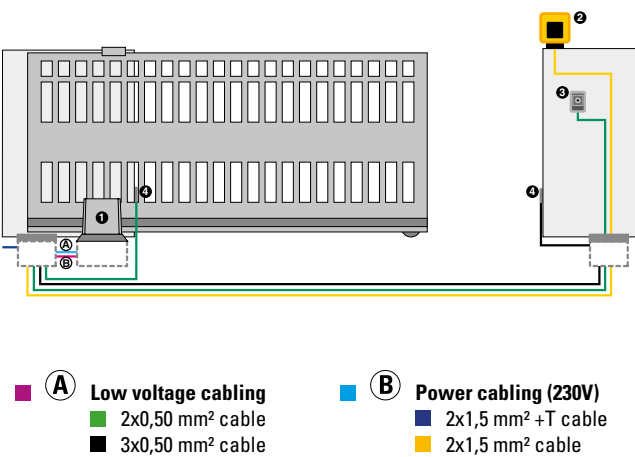


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	Gearmotor 740 C with built-in control unit and encoder, foundation plate	109600
1	1	Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490123
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	XLED flashing light	410029
U	1	Key operated button XK10	401302
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20D	785102
1		XT02 433 2 channel transmitter	787032

740 E

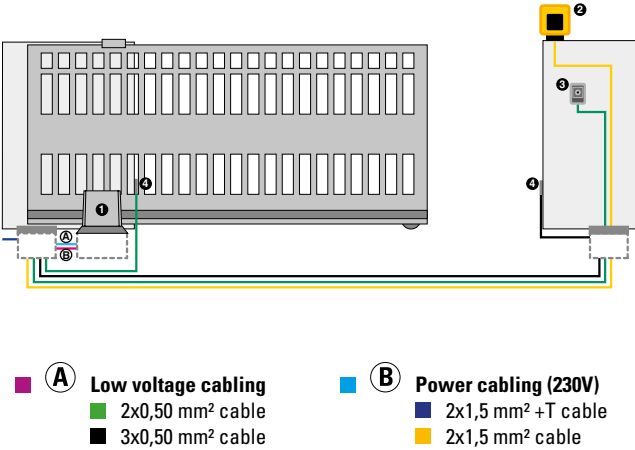


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	741 C Z16 Gearmotor with built-in electronic control unit, encoder and foundation plate	109602
1	1	Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490123
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	XLED flashing light	410029
u	1	Key operated button XK10	401302
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20D	785102
1	1	XT02 433 2 channel transmitter	787032

741 E

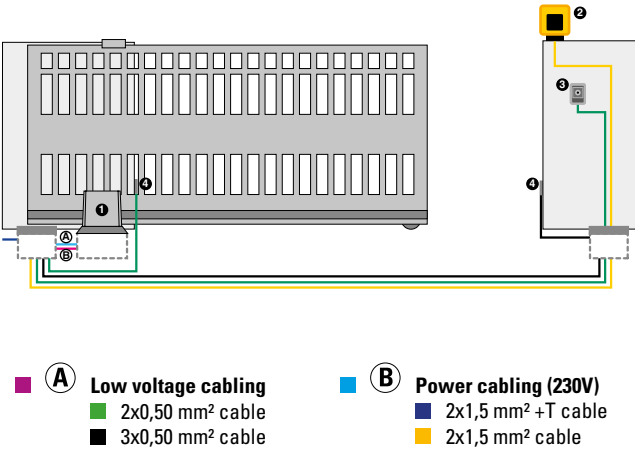


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	741 E Z16 Gearmotor with built-in electronic control unit, encoder and foundation plate	1097815
1	4	Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490123
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	XLED flashing light	410029
3	1	Key operated button XK10	401302
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20D	785102
1	1	XT02 433 2 channel transmitter	787032

741 C

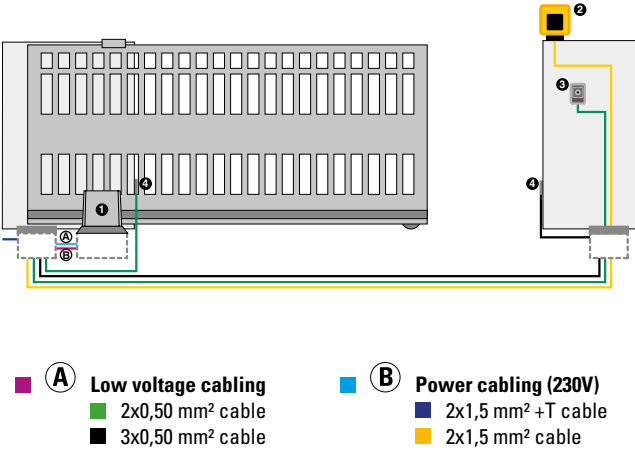


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	741 C Z16 Gearmotor with built-in electronic control unit, encoder and foundation plate	109602
1	1	Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490123
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	XLED flashing light	410029
3	1	Key operated button XK10	401302
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20D	785102
1	1	XT02 433 2 channel transmitter	787032

C720

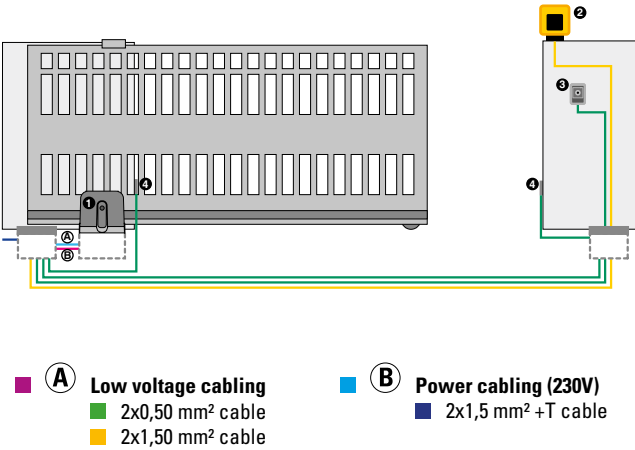


ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	C720 Gearmotor with incorporated electronic equipment and foundation plate	109320
1	4	30x20 mod.4 nylon rack with steel core (4 pcs pack, 1 m each)	490333
1	1	XF 433 MHz receiver	787831
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1	1	XT02 433 2 channel transmitter	787032


C721

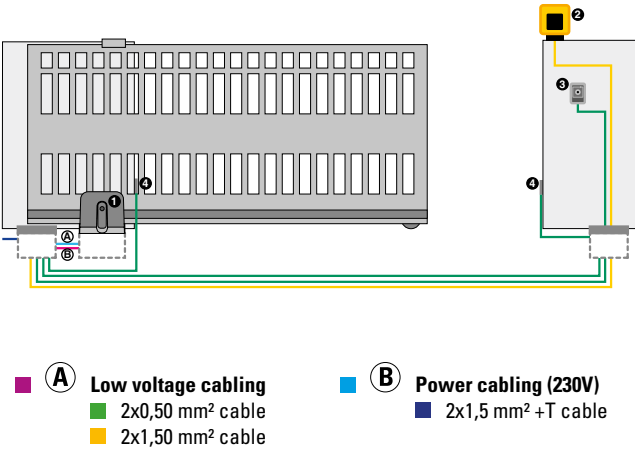

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	C720 Gearmotor with incorporated electronic equipment and foundation plate	109321
1	4	Galvanised rack 30x8 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490123
1	1	XF 433 MHz receiver	787831
2	1	XLED flashing light	410029
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
1		XT02 433 2 channel transmitter	787032


746 C

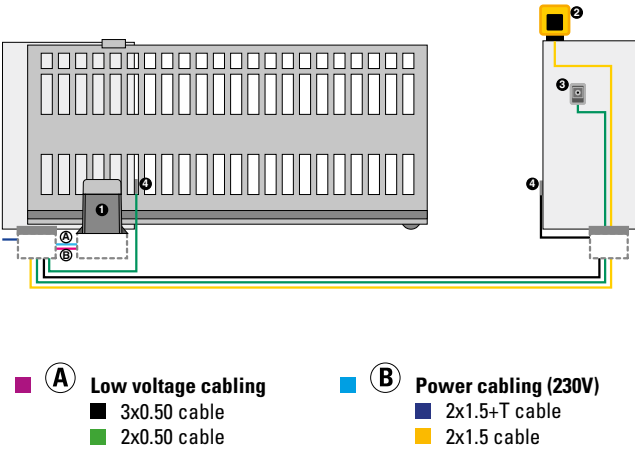

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	Gearmotor 746 C Z16	109745
1	1	Foundation plate with lateral and height adjustments	737816
1	4	Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490122
1	1	XF 433 Receiver	787831
U	1	XLED flashing light	410029
3	1	XK10B Key Selector (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	2	Low column in aluminium	401028
4	2	Foundation plate for aluminium column	737630
5	2	Column adapter	401065
1		XT02 433 2 channel transmitter	787032

844 C

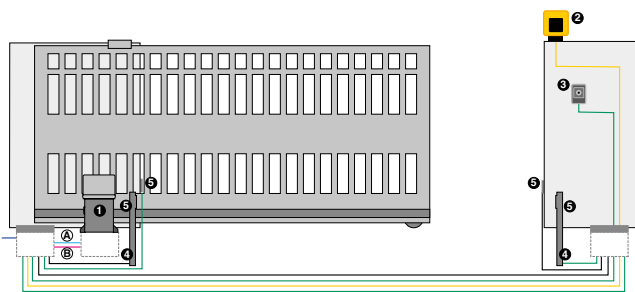

- A Low voltage cabling**


 - 2x0,50 mm² cable
 - 3x0,50 mm² cable
- B Power cabling (230V)**

 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	844 C Z16 Gearmotor	109925
1	1	Foundation plate with lateral and height adjustments	737816
1	4	Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490122
1	1	XF 433 Receiver	787831
U	1	XLED flashing light	410029
3	1	XK10B Key Selector (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
4	2	Low column in aluminium	401028
4	2	Foundation plate for aluminium column	737630
5	2	Column adapter	401065
1		XT02 433 2 channel transmitter	787032

844 3PH

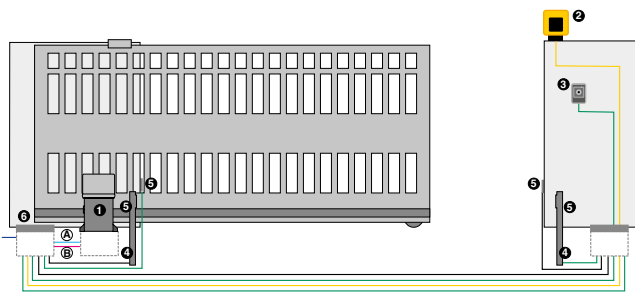

- A Low voltage cabling**


 - 2x0,50 mm² cable
 - 3x0,50 mm² cable
- B Power cabling (230V)**

 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	400V Gearmotor	109896
1	1	Foundation plate with lateral and height adjustments (6 pc. pack)	737816
1	1	Pinion Z12 for rack	7191661
1	4	Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490122
2	1	XLED flashing light	410029
3	1	Key operated button XK10	401302
3	1	Lock with key	71275101
4	2	Pair of photocells XP 30	785105
4	2	Low column in aluminium (2 pcs. pack)	401028
5	2	Foundation plate for aluminium column	737630
5	2	Adaptors for wall columns	401065
6	1	E844 3PH electronic board	202073
6	1	Enclosure mod. L for electronic control units	720118
6	1	Plug in receiver 1 channel RP 433 SLH	787852
1		XT02 433 2 channel transmitter	787032

884 MC 3PH

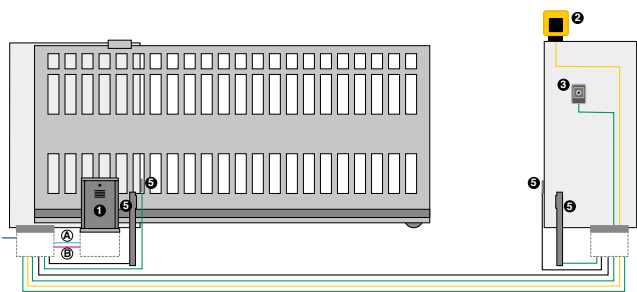

- A Low voltage cabling**

 - 2x0,50 mm² cable
 - 3x0,50 mm² cable
- B Power cabling**


 - 4x2,5 mm² +T cable
 - 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	844 MC 3PH Gearmotor	109885
1	1	Foundation plate	737628
1	1	Pinion Z16 module 6	719169
1	4	Galvanised rack 30x30 module 6	719328
1	4	Angle bracket pack for rack fixture	722123
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	XLED flashing light	410029
3	1	Key operated button XK10	401302
3	1	Lock with key	71275101
5	2	Low column H500 (multiple saleable quantity 2 pcs)	401070
5	2	Foundation plate for column	737100
5	2	Pair of photocells XP 30	785105
5	2	Adaptors for wall columns	401065
1		XT02 433 2 channel transmitter	787032

844 R Reversible

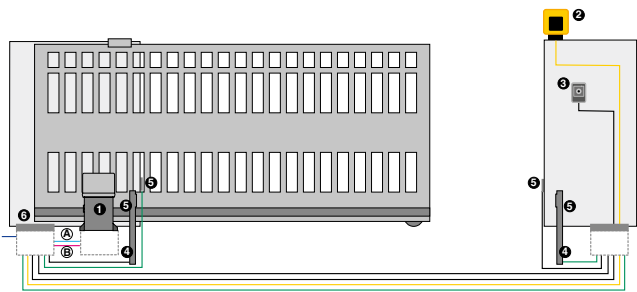

- A Low voltage cabling**

 - 3x0,50 mm² cable
 - 2x0,50 mm² cable
- B Power cabling (230V)**


 - 2x1,5 mm² +T cable
 - 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	844 R Z12 Reversible Gearmotor	109897
1	1	Foundation plate with lateral and height adjustments (6 pc. pack)	737816
1	4	Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490122
2	1	XLED flashing light	410029
3	1	Key operated button XK10	401302
3	1	Lock with key	71275101
4	2	Pair of photocells XP 30	785105
5	2	Adaptors for wall columns	401065
4	2	Low column in aluminium (2 pcs. pack)	401028
5	2	Foundation plate for aluminium column	737630
6	1	578 D electronic control unit (remote installation)	790922
6	1	Enclosure mod. L for electronic control units	720118
6	1	Plug in receiver 1 channel RP 433 SLH	787852
1		XT02 433 2 channel transmitter	787032

C851

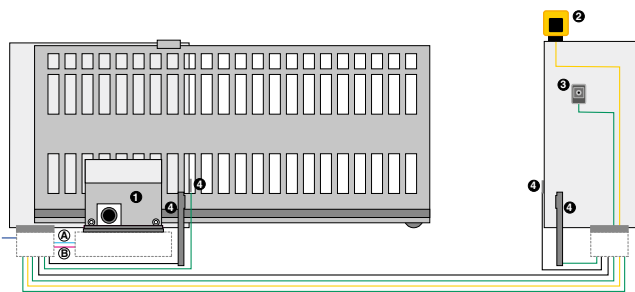

- **A** Low voltage cabling

■

 2x0,50 mm² cable

■

 3x0,50 mm² cable
- **B** Power cabling (230V)

■

 2x1,5 mm² +T cable

■


 2x1,5 mm² cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	C851 gearmotor	109903
1	1	C851 Foundation plate	737850
1	4	Galvanised rack 30x12 mod. 4 including weld-on fittings (4 pcs pack, 1 m each)	490122
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	XLED flashing light	410029
3	1	Key operated button XK10	401302
3	1	Lock with key	71275101
4	2	Pair of photocells XP 30	785105
4	2	Adaptors for wall columns	401065
5	2	Low column H500 (multiple saleable quantity 2 pcs)	401070
5	2	Foundation plate for column	737100
1	1	XT02 433 2 channel transmitter	787032

D600

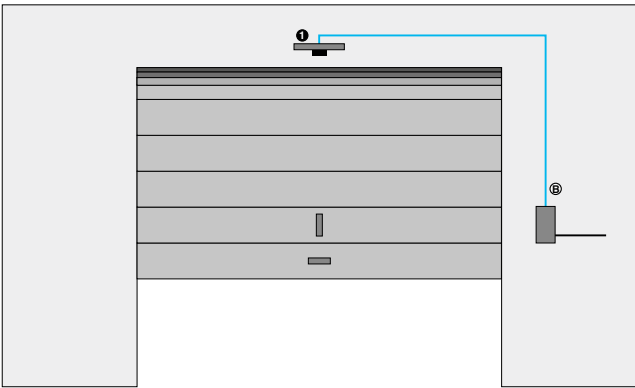

- **B** Power cabling (230V)

■


 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	D600 Operator	10566515
1	1	Single track with belt, max 2020 mm stroke	390120
1	1	Receiver XF 868 MHz	787832
1	1	Cable and sheath for external release (application to existing handle)	390488
1	1	XT02 433 2 channel transmitter	787032

D700 HS

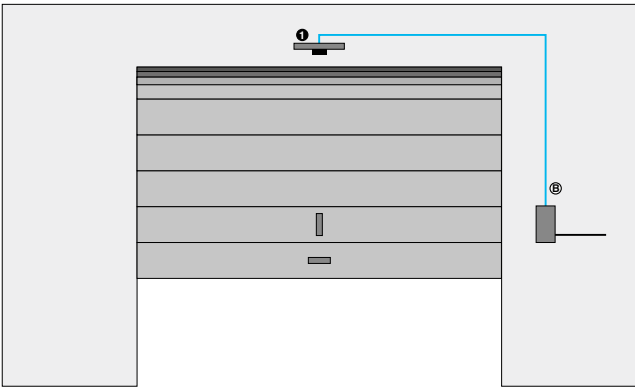


■ (B) Power cabling (230V)
■ 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	D700 HS operator	110602
1	1	Single track with belt, max 2020 mm stroke	390120
1	1	XF 433 MHz receiver	787831
1	1	Cable and sheath for external release (application to existing handle)	390488
1	1	XT02 433 2 channel transmitter	787032

D1000

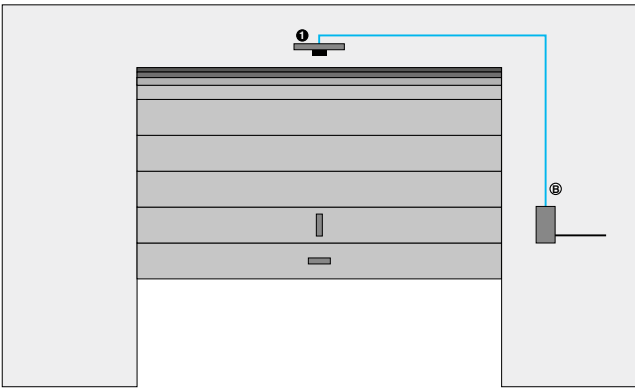


■ (B) Power cabling (230V)
■ 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	D1000 operator	110601
1	1	Single track with belt, max 2020 mm stroke	390120
1	1	XF 433 MHz receiver	787831
1	1	Cable and sheath for external release (application to existing handle)	390488
1	1	XT02 433 2 channel transmitter	787032

580

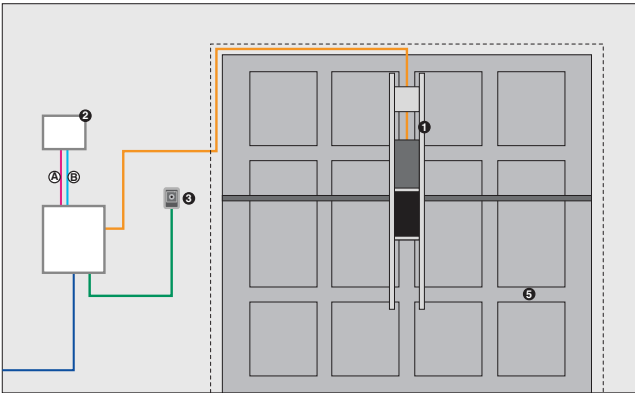


- **A** Low voltage cabling
3x0,50 mm² cable
- **B** Power cabling (230V)
■ 3x1,5 mm² +T cable
■ 2x1,5 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	580 CBAC operator	104501
1	1	Securing longitudinal support length 1.5 m	722299
2	1	E045S control unit	790077
2	1	XF 433 MHz receiver	787831
2	1	Enclosure mod. E for electronic control units	720119
3	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
3	1	Lock with key	71275101
1	1	Packs with two straight telescopic arms	390432
1	1	Pair of transmission pipes with lateral supports, for installation with 1 operator	390434
1	1	External release with key (for doors with max. thickness 15 mm from no. 1 to no. 10)	424560001
1	1	XT02 433 2 channel transmitter	787032


550

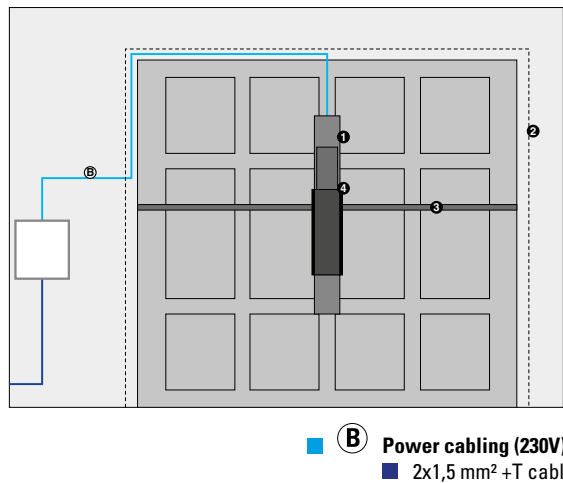

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	550 ITT Electromechanical operator with incorporated electronic control unit and encoder	110549
1	1	Securing longitudinal support length 1.5 m	722136
2	1	Packs with two curved telescopic arms	390564
3	1	2 transmission pipes (length 1.5 m), with lateral supports, for installation with a central operator	736022
4	1	External release with customized keys from no. 1 to no. 10	424550001
4	1	Plug in receiver 1 channel RP 433 SLH	787852
1		XT02 433 2 channel transmitter	787032


D550

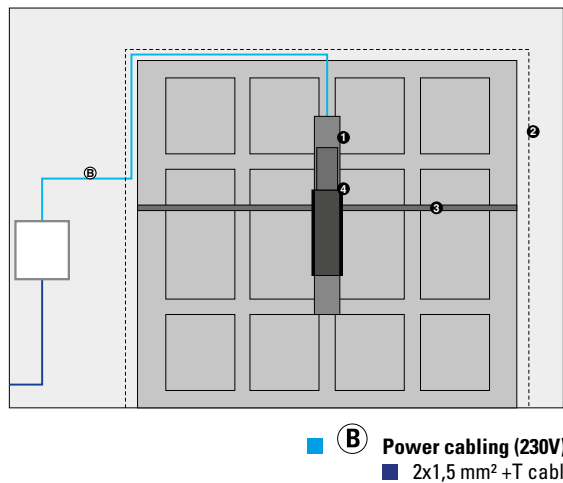

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	ITT D550 electromechanical actuator with built-in control unit and encoder	110123
1	1	Securing longitudinal support length 1.5 m	722136
2	1	Packs with two curved telescopic arms	390564
3	1	2 transmission pipes (length 1.5 m), with lateral supports, for installation with a central operator	736022
U	1	External release with customised keys from no.1 to no. 50	424550001-50
4	1	Plug in receiver 1 channel RP 433 SLH	787852
1		XT02 433 2 channel transmitter	787032


B614

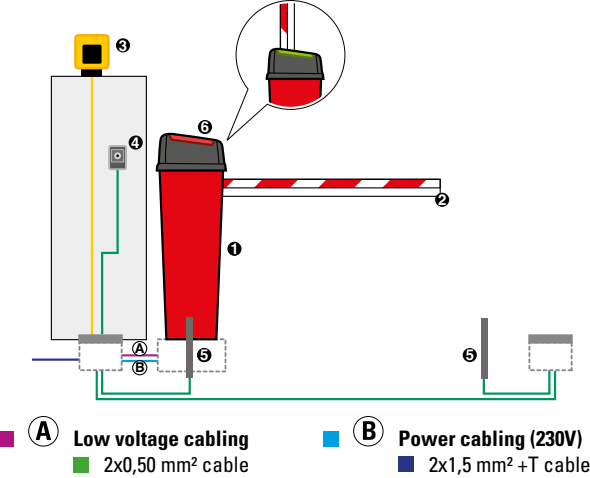

ATTENTION: The configuration can be modified according to the specific "risk analysis" of each installation (Ref. European Standards UNI-EN 12445 and 12453). The indicated cost does not include the costs for installation and the preparation of masonry, electrical and fabrication work.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	B614 Barrier	104614
1	1	B614 Foundation plate	490183
1	1	Balancing spring	721209
1	1	XF 433 MHz receiver	787831
2	1	Beam bracket for rectangular beam	428342
2	1	Rectangular standard beam - Length 3,815 mm	428090
3	1	XLED flashing light	410029
4	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
4	1	Lock with key	71275101
5	2	Adaptors for wall columns	401065
5	2	Low column in aluminium (2 pcs. pack)	401028
5	2	Foundation plate for aluminium column	737630
6	1	Integrated flashing light	410032
1	1	XT02 433 2 channel transmitter	787032


615BPR

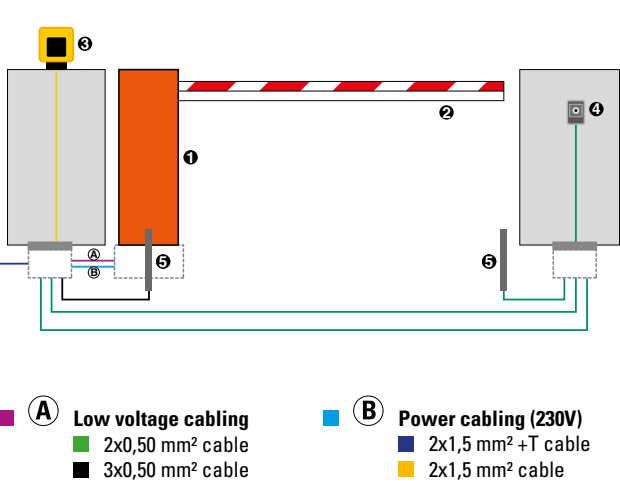

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	615BPR Standard	104906
1	1	Foundation plate	490073
1	1	Balancing springs for rectangular beams	721018
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	Beam bracket for rectangular beam	428342
2	1	Rectangular standard beam - Length 4,815 mm	428091
3	1	XLED flashing light	410029
4	1	Key operated button XK10	401302
5	1	Pair of photocells XP 30	785105
4	1	Lock with key	71275101
5	2	Adaptors for wall columns	401065
5	2	Low column in aluminium (2 pcs. pack)	401028
5	2	Foundation plate for aluminium column	737630
1	1	XT02 433 2 channel transmitter	787032


620 Standard

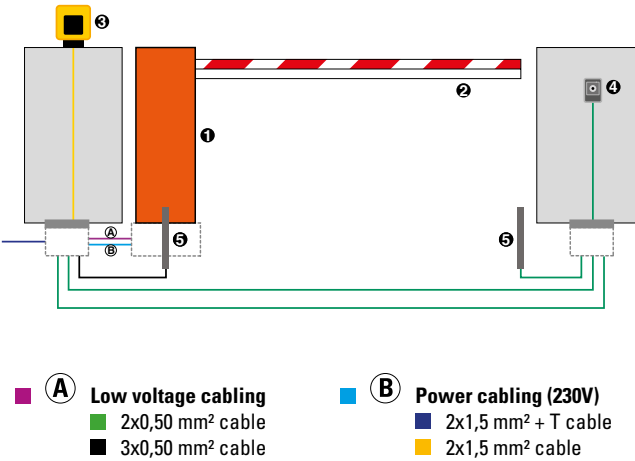

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	620 Standard barrier	1046228
1	1	Foundation plate	490058
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	Beam bracket for rectangular beam	428342
2	1	Rectangular standard beam - Length 4,815 mm	428091
3	1	XLED flashing light	410029
4	1	Key operated button XK10	401302
4	1	Lock with key	71275101
5	1	Pair of photocells XP 30	785105
5	2	Adaptors for wall columns	401065
5	2	Low column H500 (multiple saleable quantity 2 pcs)	401070
5	2	Foundation plate for column	737100
1	1	XT02 433 2 channel transmitter	787032


620 Rapid

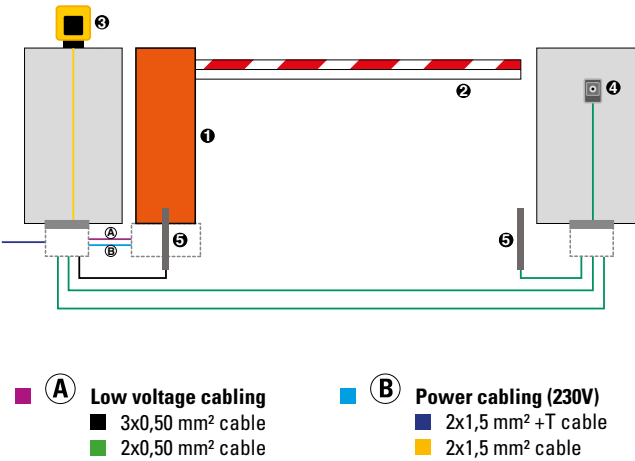

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	620 Rapid barrier	1046358
1	1	Foundation plate	490058
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	Beam bracket for rectangular beam	428342
2	1	Rectangular standard beam - Length 3,815 mm	428090
3	1	XLED flashing light	410029
4	1	Key operated button XK10	401302
4	1	Lock with key	71275101
4	1	Plastic enclosure to be walled in	720086
5	1	Pair of photocells XP 30	785105
5	2	Adaptors for wall columns	401065
5	2	Low column in aluminium (2 pcs. pack)	401028
5	2	Foundation plate for aluminium column	737630
1	1	XT02 433 2 channel transmitter	787032

B680H

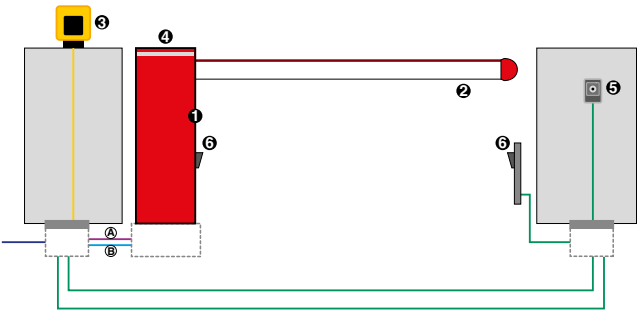


- **A**
Low voltage cabling
■ 2x0,50 mm² cable
- **B**
Power cabling (230V)
■ 2x1,5 mm² +T cable
■ 2x1,5 mm² cable

ATTENTION: The configuration can be modified according to the specific "risk analysis" of each installation (Ref. European Standards UNI-EN 12445 and 12453). The indicated cost does not include the costs for installation and the preparation of masonry, electrical and fabrication work.

EXAMPLE OF A TYPICAL INSTALLATION

Ref	Q.ty	Description	Code
1	1	B680H Barrier	104680
1	1	Red cabinet RAL 3020	416016
1	1	Foundation plate	490139
1	1	Pocket and balancing L spring	428437
1	1	Plug in receiver 1 channel RP 433 SLH	787852
2	1	Joint L	428616
2	1	Initial beam L - Length 4 m	428048
2	1	Final Beam L - Length 4.3 m	428051
2	3	Adhesive reflector kit	490117
2	1	Round beam light connection kit S/L	390992
2	1	Luminous cord 11 m pack	390993
4	1	Integrated flashing traffic light	410033
5	1	Key operated button XK10B (Availability is limited to existing inventory)	401304
5	1	Lock with key	71275101
6	1	Pair of photocells XP 20 BD (Availability is limited to existing inventory)	785103
6	1	Column (Max H 628 mm)	401039
6	1	Foundation plate for column	737637
3	1	XLED flashing light	410029
1	1	Adjustable fork for beam support	428806
1	1	Support plate for fork	737621
1	1	XT02 433 2 channel transmitter	787032

RL200

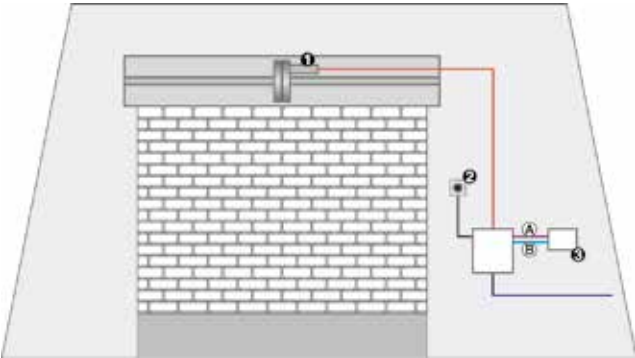


- **A Low voltage cabling**
■ 3x0,50 mm² cable
- **B Power cabling (230V)**
■ 2x1,5 mm² +T cable
■ 3x1,50 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	Gearmotor RL200 lifting capacity 170 kg.	109950
1	1	Electric brake Kit	391450
2	1	XK30 Key selector with lever release	391456
3	1	Enclosure mod. E for electronic control units	720119
3	1	200MPS electronic control board	790905

RH200B

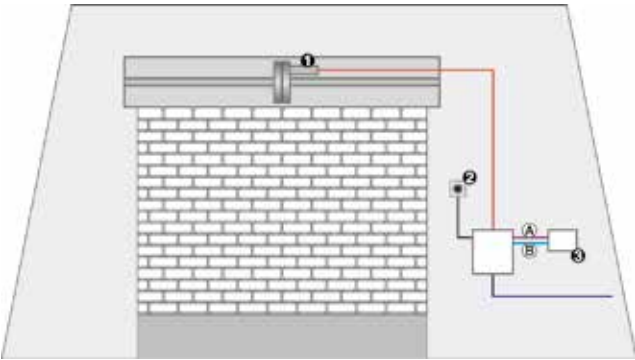


- **A Low voltage cabling**
■ 3x0,50 mm² cable
- **B Power cabling (230V)**
■ 2x1,5 mm² +T cable
■ 3x1,50 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	Gearmotor RH200B lifting capacity 280 kg.	109960
1	1	Electric brake Kit	391450
2	1	XK30 key selector with release lever	391456
3	1	Enclosure mod. E for electronic control units	720119
3	1	200MPS electronic control board	790905

RH240

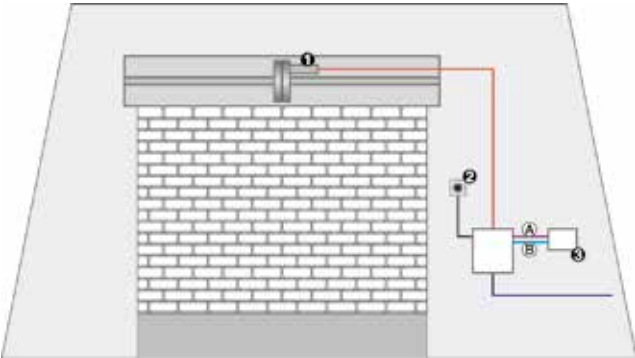


- **A** Low voltage cabling
■ 3x0,50 mm² cable
- **B** Power cabling (230V)
■ 2x1,5 mm² +T cable
■ 3x1,50 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	Gearmotor RH240 EF lifting capacity 180 kg.	109971
2	1	XK30 Key selector with lever release	391456
3	1	200MPS electronic control board	790905
3	1	Enclosure mod. E for electronic control units	720119

RH240B

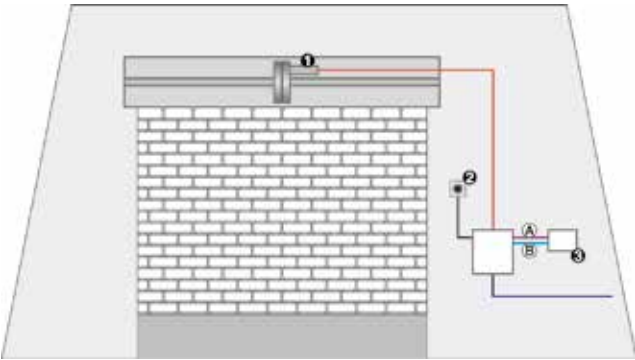

- **A** Low voltage cabling
■ 3x0,50 mm² cable
- **B** Power cabling (230V)
■ 2x1,5 mm² +T cable
■ 3x1,50 mm² +T cable

ATTENTION: The configuration does not include the safety devices (e.g.: active or passive safety edges) which must be determined according to the specific "risk analysis" of each installation (Ref.: European Standards UNI-EN 12445 and 12453). The cost indicated does not include the costs of installation and the preparation of masonry, electrical and building works.

EXAMPLE OF A TYPICAL INSTALLATION			
Ref	Q.ty	Description	Code
1	1	Gearmotor RH240B EF SUPER lifting capacity 360 kg.	109981
2	1	XK30 Key selector with lever release	391456
3	1	200MPS electronic control board	790905
3	1	Enclosure mod. E for electronic control units	720119

WARRANTY CONDITIONS

GENERAL CONDITIONS OF SALE

1. OBJECT AND SCOPE

1.1. These "General Terms and Conditions of Sale" (hereinafter, the "**Conditions**") apply to any and all sale or supply agreements (hereinafter, jointly defined, the "**Contracts**" and, individually, the "**Contract**") executed between FAAC S.p.A. soc. Unipersonale, (hereinafter, "**FAAC**"), as vendor, and the direct client of FAAC, as purchaser (hereinafter, jointly defined, the "**Clients**" and, individually, the "**Client**"), which concerns the products manufactured and/or sold by FAAC, including but not limited automations for barriers, doors, gates, tubular, traffic bollards, access control software and their accessories (hereinafter, jointly defined, the "**Products**" and, individually, the "**Product**"). These Conditions, therefore, apply only towards the Clients and don't extend to third parties.

1.2. The final user (hereinafter, the "**Final User**") to whom the Products are sold and/or installed must exclusively contact its own retailer for any warranty. It's expressly understood that, if the Final User is a "consumer", the warranty will be regulated by European laws for the consumer protection.

1.3. Except as provided in these Conditions and only to the extent mandatorily required by law, any right of recourse of the seller/retailer and/or the Client to FAAC is expressly excluded.

1.4. If the Client or the retailer also performs the installation of the Products, he must guarantee the correct installation, the connected activities (i.e. building works and electrical works) and the compliance with the local laws (if any) on safety, releasing all the necessary documentation.

2. PREVALENCE

2.1. In the event of any discrepancies between the provisions of this Conditions and those provided for in the Contract, the provisions of the Contract shall prevail, if agreed in writing.

2.2. In no case shall any general conditions of contract of the Client will be binding on FAAC, even if mentioned or included in orders or in any other documents transmitted by the Client to FAAC. No conduct of FAAC shall be interpreted or used to express tacit acceptance of FAAC to the general condition of contract of the Client. Therefore, all Contracts, offers, acceptance of orders and all deliveries by FAAC shall be deemed to have been made pursuant to the following. Conditions, except as otherwise expressly provided in writing by FAAC.

3. EXECUTION OF THE CONTRACT, TOLERANCES

3.1. Except as expressly indicated in point 3.3 below, the Contracts between FAAC and the Client shall be concluded in accordance with the provisions set forth in this clause.

Any offer that may be issued by FAAC (hereinafter, the "**Offer**") shall in no event be binding upon FAAC and shall not result in the conclusion of a Contract but shall solely represent the terms for the sale/supply of the Product(s) pursuant to these Conditions. The order submitted by the Client (hereinafter, the "**Order**") shall therefore be drafted in accordance with the relevant Offer (where applicable) and with these Conditions, with full acceptance of all terms contained herein.

It is expressly understood that the Contract between FAAC and the Client shall be deemed concluded exclusively upon FAAC's issuance, at its sole discretion, of a written order confirmation to the Client (hereinafter, the "**Order Confirmation**"). The Order Confirmation may be issued within no later than 10 business days from the date on which FAAC receives the Order. Upon expiry of such term, failure by FAAC to send the Order Confirmation shall constitute an implicit rejection of the Order, unless otherwise agreed in writing between the parties.

In any event, performance of the Contract shall take place under the terms set out in the Conditions, the Offer (where applicable), and the Order Confirmation.

3.2. The Contract cannot be terminated for convenience by the Client, except with the written consent of FAAC. It is understood that in such event the Client shall indemnify and hold FAAC harmless of any loss, cost, or damage suffered by FAAC because of such termination by the Client.

3.3. It is expressly understood that the execution of the Contract by FAAC is conditioned upon the obligation of the Client to pay any previous outstanding invoices not paid by the Client to FAAC in the agreed terms.

4. SELLING PRICE OF THE PRODUCTS

4.1. Unless otherwise agreed in writing by FAAC and the Client, the prices applicable to each sale/supply of Products are indicated in FAAC's price list in force as of the date of conclusion of the Contract (hereinafter "Selling Price"), and the Selling Price is expressed in EURO.

4.2. The Selling Price, as well as any discounts applied by FAAC, shall be intended net of VAT and are subject to changes during the validity of FAAC's price list.

4.3. Unless otherwise agreed in writing by FAAC and the Client, the Selling Price is intended "FCA" (in accordance with the most recent edition of the ICC'S Incoterms) – at FAAC's place of business in Zola Predosa (Bologna – Italy) or at other FAAC's storages – VAT and shipping cost excluded.

5. PAYMENT

5.1. Except as otherwise agreed in writing, payment for all Products shall be made by means of:

(A) An irrevocable letter of credit ("**L/C**"), confirmed by a primary International bank, which has an official branch in the Client's country, in compliance with publication 500 of the International Chamber of Commerce as updated from time to time, and valid for at least 30 days from the anticipated date of final delivery; or in alternative,

(B) a bank wire transfer in accordance with the payment terms agreed in writing by FAAC and the Client.

5.2. Delivery of the Products is conditional upon the issuing of the above L/C's or the payment of the price by any other means, which may have otherwise been authorised in writing by FAAC. Regardless of the means of payment agreed upon, it is understood that payments shall be deemed to have been effected at FAAC's place of business.

5.3. Except in cases of wilful misconduct, gross negligence, or where mandatorily required by law, under no circumstance shall the Client be entitled to suspend and/or delay payment of the Products or raise any claim in relation thereto until full payment has been made. In the event of any missing payment, FAAC shall be entitled to exercise its right provided under the laws in force where the Client is established in relation to late payment in commercial transaction, without prejudice to its right to seek any further damages. In any event, FAAC may, (i) terminate the Contract in relation to the Products not yet delivered and/or (ii) delay the carrying out of any order in hand, inter alia, by suspending delivery of the Products until such time as all outstanding debts owed by the Client to FAAC have been paid.

6. OTHER EXPENSES AND DUTIES

6.1. Unless otherwise agreed between FAAC and the Client, the price applied to any sale of Products are for delivery "FCA" (in accordance with the most recent edition of the ICC'S Incoterms) at FAAC's place of

business in Zola Predosa (Bologna – Italy) or at other FAAC's storages, therefore FAAC shall not enter into any shipment or transportation agreement and shall not insure the Products, unless the Client should so expressly instruct FAAC in writing, being understood in any event that any and all risk and expenses in relation thereto shall be borne exclusively by the Client.

6.2. The Client agrees promptly to collect the Products upon receiving notice that the Products are ready and at its disposal and, in any event, within 8 (eight) days of the date of said notice.

6.3. Any and all taxes, duties, levies, licenses, authorisation, permits and any and all tax and administrative formalities relating to the importation and/or resale of the Products shall be borne and carried out exclusively by the Client or, alternatively, they may be carried out by FAAC at the Client's sole risk, expense and responsibility.

6.4. Standard packing of the Products suitable for air, land and sea transportation in container will be provided by FAAC free of charge. If the Client requires any special packing, the full cost of said special packing shall be invoiced by FAAC to the Client.

7. DELIVERY

7.1. All the delivery dates given by FAAC shall be deemed as indicative, not binding and are expressed in working days. In any event of late delivery, the Client shall not be entitled to cancel the Contract or to any compensation for damages of whatever nature.

7.2. Unless otherwise agreed between FAAC and the Client, as mentioned before the Products shall be delivered "FCA" (in accordance to the ICC's Incoterms 2020) at FAAC's place of business in Zola Predosa (Bologna – Italy) or at other FAAC's storages and, therefore, the Products are delivered (that is, the risks and costs pass from FAAC to the Client) when they are loaded on the carrier's means of transport made available by the Client.

7.3 The Products thus delivered to Client must not be returned by the latter to FAAC for any reason, unless authorized in writing by FAAC which will indicate also the terms and conditions of such authorized return (hereinafter, "**Commercial Return**").

7.4 In case of missing or excess Products, the Customer must inform the relevant customer service of FAAC by @mail within 15 (fifteen) days following the receiving date of the Product.

8. QUALITY STANDARDS

8.1. FAAC does not represent or guarantee the Client that the Products comply with the applicable laws and regulations in force in the country where the Client is established or where the Products are to be sold and/or delivered and/or installed. FAAC shall have no obligation to modify the Product in compliance with said laws or regulations and the Client shall be solely responsible for ensuring that the Product and any services of the Client conform to the applicable technical and safety standards, laws, and regulations in force in that country.

8.2. The Client, moreover, acknowledges that the Products may be dangerous to persons or property when not installed or not used in strict compliance with the instructions for installation and use supplied by FAAC and with the safety requirements specified in the technical standards. Except in cases of FAAC's willful misconduct or gross negligence, FAAC expressly disclaims liability for any personal injury or property damage resulting from installation or use of the Products, other than in strict compliance with FAAC's written instructions with respect to installation and use, or from installation or use of the Products together with safety accessories or other Products not manufactured by FAAC, being understood that the maximum liability of FAAC to the Client arising out of or in connection with the Product and based on a claim of breach or under the warranty, shall in no case exceed the price paid to FAAC for

the Product which gives rise to the claim and, therefore, in no event FAAC shall not be liable also for special and consequential damages including, without limitation, loss of profits and indirect damages.

9. WARRANTY

9.1. FAAC warrants and guarantees to the Client that all new Products shall be free from manufacturing defects, under normal use and service, for a period of 30 (thirty) months from the manufacturing date (as shown on the tag plate of each Product) (the "**Warranty Period**").

9.2. The Client acknowledges and agrees that, except in cases of willful misconduct or gross negligence, FAAC's warranty is expressly limited to manufacturing defects, and said warranty shall not extend to any damage to the Products resulting from other causes, including, without limitation, misuse, transportation, or faulty installation thereof. Accordingly, FAAC's exclusive warranty action shall be the repair or replacement of the defective part of the Product free of charge at FAAC's own workshop unless otherwise agreed in writing between FAAC and the Client.

Except in cases of willful misconduct or gross negligence, the maximum liability of FAAC towards the Client, arising out of or in connection with the Products in question and based on a claim of breach or repudiation of warranty, shall in no event exceed the price paid to FAAC for the Product(s) concerned, and, in addition, FAAC shall not be liable also for special and consequential damages of the Client including, without limitation, loss of profits and indirect damages.

With the prior written authorization of FAAC, the Client shall send the part to be repaired or replaced, free of charge, and FAAC shall examine said part to determine whether it is defective and whether the manufacturer is responsible for the defect; in which case only FAAC shall repair or replace the part, in its sole discretion, and shall send the repaired or replacement part to the Client who shall bear the cost of transportation and installation only. Any Products which may have been returned without FAAC's prior written authorisation shall not entitle the Client to any credit notes or reimbursement. In any event, any and or risk and expenses relating to the return of the Products shall be born exclusively by the Client.

Any claims relating to the defects of the Product in question, together with all the necessary photographic evidences of the claimed defect, must be sent to FAAC by registered letter or by @mail or, in general, any electronic/informatics tools within (i) 8 (eight) days following the receiving date of the Product in the case of evident defects and/or (ii) 8 (eight) days following the date of discovery in the case of latent defects and in any event, within the Warranty Period, failing which the Client shall lose all right to bring any claim in relations thereto. Any and all further or other warranties, are they expressed or implied, including without limitation any warranties provided by law, shall be deemed excluded and superseded by these Conditions. FAAC further disclaims all expressed, statutory, or implied warranties applicable to Products and accessories which are not manufactured by it.

9.3. Unless otherwise agreed between FAAC and the Client, (i) the Product, repaired or replaced, will be sent to the Client in full charge of the Client (FCA); (ii) warranty intervention does not extend the original warranty period of the Product and does not initiate a new warranty period for the repaired or replaced part; (iii) the repaired or replaced part will be owned by FAAC; (iv) the Customer will lose the warranty if he does not pay the invoices.

9.4. Warranty excludes the damages connected to: (i) transport; (ii) faults and/or negligence and/or inadequacy of the installation and of the use of the electrical system; (iii) tampering by unauthorized personnel or the use of components and / or non-original spare parts; (iv) defects caused by chemical agents or atmospheric and / or natural phenomena in general; (v) the installation of the Products not according to the rules of the art, safety and compliance of use expressly indicated in the technical documentation of the same Products. Furthermore, warranty does not include (vi) the consumables; (vii) interventions for verification of any faults not found; (viii) compensation for the period of inactivity of the plant where the Products are installed.

10. TITLE

10.1. Title to the Products shall pass to the Client only upon payment in full of the sale price of the Products. In the event of default by the Client, FAAC shall be entitled, without any formalities, including notice of default, to repossess all of the Products with respect to which title has not yet passed to the Client, wherever said Products may be; in addition, FAAC reserve the right to seek any other judicial remedies available to it in respect of the damages suffered.

10. PRIVACY

11.1. Under the clause 13 of the del Regulation (UE) 2016/679, FAAC, as data controller (hereinafter, the "Data Controller"), inform the Client that all the data disclosed by the Client in the performance of the Contract which is personal shall be processed according to such Regulation 2016/679 and, therefore, declare as follows: (a) the processing of data will be carried out, in compliance with such Regulations, by means of paper, computer or telematics means capable of storing, managing, transmitting the data itself, however by means of suitable means to guarantee their security and confidentiality; (b) the objective of the processing will be related and instrumental to the conclusion, management and execution of the Conditions and the Contracts and for any administrative and accounting purposes connected with them (for example, but not limited to, handling of orders and invoices, drafting contracts including credit insurance; assignment of claim agreement; transportation and/or shipment agreement; etc.); for marketing purposes related to similar products to those already acquired, because it is a lawful interest of FAAC (under clause 6, Regulation 2016/679); for purposes related to the enforcement of legal obligations, regulations, Italian and UE regulations, as well as to order of competent Authority; (c) the transfer of the data is mandatory for all that is required by legal and contractual obligations and therefore any refusal by the Client to communicate the data or to enable it to be processed subsequently may cause the impossibility for FAAC to give rise to the obligations of the Contract; the transfer is discretionary for marketing activities; (d) the data will not be disclosed, but can be communicated exclusively for the above purposes, to the appropriate authorized persons for which will be necessary to make such communication for the purposes set out in the above letter (b), such as the other companies in the group to which FAAC belongs; (e) the Client has the right to access to its personal data, emend, cancel, limit the processing, to oppose, in addition to the right to portability, by submitting formal requests directly to the Data Controller; the Client has also the right to make a claim to the supervisory Authorities; (f) the data will be stored for commercial and marketing purposes for all the duration of the commercial relationship between FAAC and the client; after for the sole law's purpose; (g) the Data Controller is FAAC, Via Calari n. 10, Zola Predosa, Bologna – Italy.

12. FORCE MAJEURE

12.1. FAAC shall not be liable or reasonable to the Client for any failure or delay in performing of fulfilling any obligations undertaken in reference to the supply of the Product when such failure or delay is caused by occurrences beyond FAAC's reasonable control, or in any case caused by an event of force majeure, including, but not limited to, late delivery or non-delivery of materials by suppliers, strikes and other trade union actions, terrorist activities, suspension of electrical energy, entering in force of International sanctions and/or trade limitations, pandemic, difficulties in transportation. In the event of such events, the activities which cannot be performed shall be automatically postponed, without any penalty for FAAC, for a period equal to the situation of force majeure

13. APPLICABLE LAW AND DISPUTE RESOLUTIONS

13.1. Unless provided at art. 13.2 below, any dispute that may arise in relation to the interpretation, performance, execution, validity and/or dissolution of the Contracts and/or connected to the Contracts, will be exclusively governed to the Italian laws - with the express exclusion of the 1980 Vienna Convention - and, the Court of Milan will have exclusive jurisdiction.

13.2. Any dispute related to and/or connected to breach of the obligations

set forth in the art. 5 of this Condition will be exclusively governed to the Client's national laws - with the express exclusion of the 1980 Vienna Convention - and the competent Court will be the court where the Client is established.

14. OTHER

14.1. The invalidity or unenforceability of any provision, or portion thereof, of this Conditions shall not affect the validity or enforceability of any other provision.

14.2. Any failure by FAAC to enforce any of its rights under this Conditions shall not be construed as a waiver of said rights.

14.3. This Conditions supersede any prior agreement, whether written or oral, between FAAC and the Client, with respect to the subject matter.

14.4 Any amendment to this Conditions shall be effective only if made in writing and duly signed by the FAAC and the Client.

14.5. All documents, information, data, contents, intellectual property rights relating to and/or connected to the Products—including, but not limited to, trademarks, patents, designs, models, copyrights, software, hardware, know-how, and/or other distinctive signs, whether registered or not — are and shall remain exclusive prop-erty of FAAC (hereinafter, the "**Intellectual Property**"), regardless of the termination of these Conditions and/or the Contract for any reason whatsoever. Sale/supply of the Products does not imply any assignment, concession and/or transfer of the Intellectual Property to Customer and/or any third party.

Unless otherwise agreed in advance and in writing by FAAC, Customer undertakes not to use the Intellectual Property for purposes other than those provided for in these Conditions and/or the Contract as well as not to reproduce, remove, alter, suppress, disseminate, disassemble, rework, modify, reverse engineer and/or otherwise exploit the Intellectual Property, in any manner and/or form. Customer further undertakes not to register, attempt to register or otherwise protect the Intellectual Property nor any intellectual property right—including, but not limited to, any trademark, patent, design, model, copyright, software, hardware, know-how, and/or other distinctive sign—identical, similar, and/or confusingly similar to the Intellectual Property.

Unless otherwise agreed in advance and in writing by FAAC, any software contained in the Products is property of FAAC, which grants Customer a royalty-free, non-exclusive, non-transferable, and non-sublicensable license to use the afore-mentioned software, provided that Customer uses it in compliance with all provi-sions of these Conditions and/or the Contract.

Violation of even one of the provisions as set into this clause 14.5. entitles FAAC to immediately terminate the Contract, without prejudice to any further rights and/or remedies provided, to the maximum extent possible, by the Applicable Law, these Conditions and/or the Contract.

14.6. FAAC has implemented a Code of Ethics which is available on web site of FAAC www.faactechnologies.com and which the Client accepts to comply in every terms.

14.7. In accordance with the laws in force, including but not limited to the Regulation (EU) 2018/1912, in case of FAAC is the sender of the shipment, FAAC shall provide the carriage of goods document called International Consignment Note (hereinafter, the "**CMR**") to the Client by courier. The Client shall return to FAAC the duly signed CMR within 10 days of delivery of the Products and shall also send a digital copy to the following email address: orders.it@faactechnologies.com.

Conversely, for shipments under EXW or FCA terms, the Client shall be deemed the sender of the shipment, according to the aforementioned laws. In such cases, the Client shall nonetheless submit the duly signed CMR to FAAC within the timeframe indicated in this clause 14.7.

Failure by the Client to return the duly signed CMR in accordance with clause 14.7. shall entitle FAAC to charge the Client any applicable VAT, if and when re-requested by the competent Authority.

14.8. FAAC S.p.A., although operating in the field of design, production and commercialization of solutions for pedestrian and vehicle access control automations, cannot rule out that some its marketed goods fall under those whose export and/or use in Russia, Belarus and the independent Ukrainian republics (hereinafter, the "Countries") is prohibited by EU Regulation No. 833/2014 and its subsequent amendments (hereinafter, the "Regulation"). Given FAAC S.p.A.'s interest in compliance with the Regulation, therefore, the Client commits not to export and/or use in the Countries, directly or indirectly, the Products that are subject to the Contract. In the event of non-fulfilment, FAAC S.p.A. reserves the right to legally terminate the Contract and/or cease business relations with the Client, excluding any liability on FAAC S.p.A.

14.9. The Client shall not, under any circumstances, use the Products, nor allow the Products to be used, directly or indirectly, for any activities or operations connected with the development, production, handling or deployment of weapons, munitions, armaments, military equipment, or for any purpose that may result in violations of personal freedoms or human rights. The Client further undertakes not to modify, transfer, resell, or otherwise make the Products available where such use could reasonably be considered possible. Any breach of clause 14. 9. shall entitle FAAC to immediately terminate the Contract without prejudice to any further rights or remedies, excluding any liability on FAAC S.p.A.

14.10. The Client represents and warrants that it does not, directly or indirectly, engage in any business dealings or maintain any relationships, commercial or otherwise, that would violate any sanctions or restrictive measures issued by the United States of America (U.S.), the United Kingdom (U.K.), the European Union (E.U.), or any other competent Authority.

The Client further declares that (a) it is not itself designated, listed, or otherwise subject to any sanctions, and (b) it does not, in any capacity, subcontract, cooperate with, or maintain commercial or financial relationships with individuals or entities subject to such sanctions, nor does it employ or engage any intermediaries acting on behalf of sanctioned parties.

Any breach of clause 14.10. shall entitle FAAC to immediately terminate the Contract without prejudice to any further rights or remedies, excluding any liability on FAAC S.p.A.

HEADQUARTERS

ITALY

FAAC S.p.A. - Soc. Unipersonale

Via Calari 10 - 40069 Zola Predosa (BO)

Tel. +39 051 61724 - Fax +39 051 0957820

it.info@faactechnologies.com - www.faaactechnologies.com

FAAC
A BRAND OF
FAAC TECHNOLOGIES

www.faac.biz
www.faaactechnologies.com

For an on-going product improvement, FAAC SpA reserves the right to make technical modifications without prior notice. All rights are reserved and the reproduction, in any form or by any means, of the whole or any part of this publication, is forbidden without prior permission of FAAC SpA.